

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		H2		REVISED PER ECO-11-004587	11MAR11	RK	HMR




- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PART INDICATED IS PACKAGED IN "SINGLE TUBES"
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

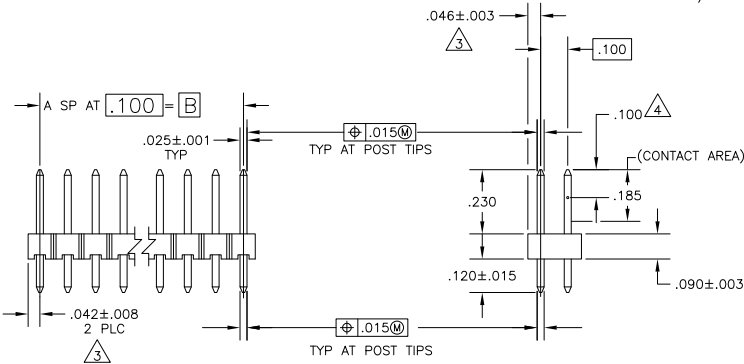

QTY	DESCRIPTION	1.284	1.200	12	26	4-103186-1
3	OBsolete	3.984	3.900	39	80	4-103186-0
3	OBsolete	3.884	3.800	38	78	3-103186-9
3	OBsolete	3.784	3.700	37	76	3-103186-8
3	OBsolete	3.684	3.600	36	74	3-103186-7
3	OBsolete	3.584	3.500	35	72	3-103186-6
3	OBsolete	3.484	3.400	34	70	3-103186-5
3	OBsolete	3.384	3.300	33	68	3-103186-4
3	OBsolete	3.284	3.200	32	66	3-103186-3
3	OBsolete	3.184	3.100	31	64	3-103186-2
3	OBsolete	3.084	3.000	30	62	3-103186-1
3	SUPERSEDED BY 8-146256-0	2.984	2.900	29	60	3-103186-0
3	OBsolete	2.884	2.800	28	58	2-103186-9
3	OBsolete	2.784	2.700	27	56	2-103186-8
3	OBsolete	2.684	2.600	26	54	2-103186-7
3	OBsolete	2.584	2.500	25	52	2-103186-6
3	OBsolete	2.484	2.400	24	50	2-103186-5
3	OBsolete	2.384	2.300	23	48	2-103186-4
3	OBsolete	2.284	2.200	22	46	2-103186-3
3	OBsolete	2.184	2.100	21	44	2-103186-2
3	OBsolete	2.084	2.000	20	42	2-103186-1
3	OBsolete	1.984	1.900	19	40	2-103186-0
3	OBsolete	1.884	1.800	18	38	1-103186-9
3	OBsolete	1.784	1.700	17	36	1-103186-8
3	OBsolete	1.684	1.600	16	34	1-103186-7
3	OBsolete	1.584	1.500	15	32	1-103186-6
3	OBsolete	1.484	1.400	14	30	1-103186-5
3	OBsolete	1.384	1.300	13	28	1-103186-4
3	OBsolete	1.284	1.200	12	26	1-103186-3
3	OBsolete	1.184	1.100	11	24	1-103186-2
3	OBsolete	1.084	1.000	10	22	1-103186-1
3	OBsolete	.984	.900	9	20	1-103186-0
3	OBsolete	.884	.800	8	18	103186-9
3	OBsolete	.784	.700	7	16	103186-8
3	OBsolete	.684	.600	6	14	103186-7
3	OBsolete	.584	.500	5	12	103186-6
3	OBsolete	.484	.400	4	10	103186-5
3	OBsolete	.384	.300	3	8	103186-4
3	OBsolete	.284	.200	2	6	103186-3
3	OBsolete	.184	.100	1	4	103186-2
3	OBsolete	.084	---	---	2	103186-1



RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .005, 1 PLC ± .005, 2 PLC ± .005, 3 PLC ± .005, 4 PLC ± .005. MATERIAL: ALUMINUM. FINISH: NONE. THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. POST: PRODUCTION BRIDGE.

DATE: 130C187. BY: H. MOLL. CHK: T. CLARK. APPD: T. CLARK. PRODUCT SPEC: APPLICATION SPEC: WEIGHT: CUSTOMER DRAWING.

TE Connectivity. HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 €, VERTICAL, WITH .025 SQ POSTS. SIZE: A2. CASE CODE: 00779. DRAWING NO: 103186. RESTRICTED TO: --. SCALE: 4:1. SHEET: 1 of 1. REV: H2.