



REV	DATE	DESCRIPTION	BY	APP
AD	00	REVISED PER EDD-11-004917	11MR11	RK HMR

- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 3. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ FINISH: POSTS: .00030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- △ FINISH: POSTS: .00030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

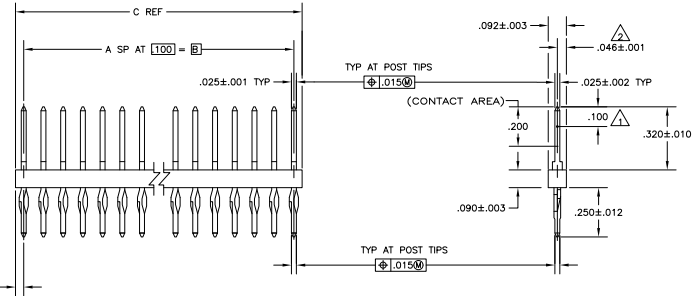

△ .042±.008
 2 PLC



RECOMMENDED HOLE LAYOUT

PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
△ OBSOLETE	.284	.200	2	3	9-103336-0
△ OBSOLETE	.684	.600	6	7	8-103336-9
△ OBSOLETE	.484	.400	4	5	8-103336-8
△ OBSOLETE	.584	.500	5	6	8-103336-7
△ OBSOLETE	.384	.300	3	4	8-103336-6
△ OBSOLETE	.084	0	0	1	8-103336-5
△	.184	.100	1	2	8-103336-4
△	3.984	3.900	39	40	8-103336-3
△ OBSOLETE	3.584	3.500	35	36	7-103336-9
△ OBSOLETE	3.184	3.100	31	32	7-103336-5
△ OBSOLETE	2.984	2.900	29	30	7-103336-3
△ OBSOLETE	2.484	2.400	24	25	6-103336-8
△ OBSOLETE	1.984	1.900	19	20	6-103336-3
△ OBSOLETE	1.884	1.800	18	19	6-103336-2
△ OBSOLETE	1.784	1.700	17	18	6-103336-1
△ OBSOLETE	1.684	1.600	16	17	6-103336-0
△ OBSOLETE	1.584	1.500	15	16	5-103336-9
△ OBSOLETE	1.484	1.400	14	15	5-103336-8
△ OBSOLETE	1.384	1.300	13	14	5-103336-7
△ OBSOLETE	1.284	1.200	12	13	5-103336-6
△ OBSOLETE	1.184	1.100	11	12	5-103336-5
△ OBSOLETE	1.084	1.000	10	11	5-103336-4
△ OBSOLETE	.984	.900	9	10	5-103336-3
△ OBSOLETE	.884	.800	8	9	5-103336-2
△ OBSOLETE	.784	.700	7	8	5-103336-1

△	.284	.200	2	3	4-103336-0
△	.684	.600	6	7	3-103336-9
△	.484	.400	4	5	3-103336-8
△	.584	.500	5	6	3-103336-7
△	.384	.300	3	4	3-103336-6
△ OBSOLETE	.084	0	0	1	3-103336-5
△	.184	.100	1	2	3-103336-4
△	3.984	3.900	39	40	3-103336-3
△ OBSOLETE	3.584	3.500	35	36	3-103336-2
△ OBSOLETE	3.184	3.100	31	32	3-103336-1
△ OBSOLETE	2.984	2.900	29	30	2-103336-3
△ OBSOLETE	2.484	2.400	24	25	2-103336-8
△ OBSOLETE	1.984	1.900	19	20	2-103336-3
△ OBSOLETE	1.884	1.800	18	19	2-103336-2
△ OBSOLETE	1.784	1.700	17	18	2-103336-1
△ OBSOLETE	1.684	1.600	16	17	2-103336-0
△ OBSOLETE	1.584	1.500	15	16	1-103336-9
△ OBSOLETE	1.484	1.400	14	15	1-103336-8
△ OBSOLETE	1.384	1.300	13	14	1-103336-7
△ OBSOLETE	1.284	1.200	12	13	1-103336-6
△ OBSOLETE	1.184	1.100	11	12	1-103336-5
△ OBSOLETE	1.084	1.000	10	11	1-103336-4
△ OBSOLETE	.984	.900	9	10	1-103336-3
△ OBSOLETE	.884	.800	8	9	1-103336-2
△ OBSOLETE	.784	.700	7	8	1-103336-1

THIS DRAWING IS A CONTROLLED DOCUMENT. SEE TABLE FOR CLASSIFICATION.

UNCLASSIFIED, COMPLIANT WITH ISO 9001:2015

TE Connectivity

UNSHROUDED, COMPLIANT PIN, SINGLE ROW, 100 X 1000/A, WITH 625 50 POSTS

SIZE: 100 X 1000/A, WITH 625 50 POSTS

REVISED PER EDD-11-004917

DATE: 11/11/11

BY: 11MR11

APP: RKH

CUSTOMER DRAWING

100779

103336

4.1

1 of 1

H3