

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
H2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

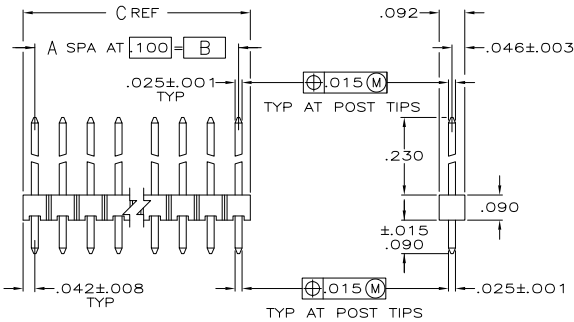

- ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ⊕ .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
 - ⊕ .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
 - ⊕ PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
 - ⊕ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR BLACK.
 - ⊕ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

QTY	DESCRIPTION	1.584	1.500	15	16	4-103741-2
⊕	⊕	1.384	1.300	13	14	4-103741-1
⊕	⊕	3.984	3.900	39	40	4-103741-0
⊕	⊕	3.884	3.800	38	39	3-103741-9
⊕	⊕	3.784	3.700	37	38	3-103741-8
⊕	⊕	3.684	3.600	36	37	3-103741-7
⊕	⊕	3.584	3.500	35	36	3-103741-6
⊕	⊕	3.484	3.400	34	35	3-103741-5
⊕	⊕	3.284	3.300	33	34	3-103741-4
⊕	⊕	3.284	3.200	32	33	3-103741-3
⊕	⊕	3.184	3.100	31	32	3-103741-2
⊕	⊕	3.084	3.000	30	31	3-103741-1
⊕	⊕	2.984	2.900	29	30	3-103741-0
⊕	⊕	2.884	2.800	28	29	2-103741-9
⊕	⊕	2.784	2.700	27	28	2-103741-8
⊕	⊕	2.684	2.600	26	27	2-103741-7
⊕	⊕	2.584	2.500	25	26	2-103741-6
⊕	⊕	2.484	2.400	24	25	2-103741-5
⊕	⊕	2.384	2.300	23	24	2-103741-4
⊕	⊕	2.284	2.200	22	23	2-103741-3
⊕	⊕	2.184	2.100	21	22	2-103741-2
⊕	⊕	2.084	2.000	20	21	2-103741-1
⊕	⊕	1.984	1.900	19	20	2-103741-0
⊕	⊕	1.884	1.800	18	19	1-103741-9
⊕	⊕	1.784	1.700	17	18	1-103741-8
⊕	⊕	1.684	1.600	16	17	1-103741-7
⊕	⊕	1.584	1.500	15	16	1-103741-6
⊕	⊕	1.484	1.400	14	15	1-103741-5
⊕	⊕	1.384	1.300	13	14	1-103741-4
⊕	⊕	1.284	1.200	12	13	1-103741-3
⊕	⊕	1.184	1.100	11	12	1-103741-2
⊕	⊕	1.084	1.000	10	11	1-103741-1
⊕	⊕	.984	.900	9	10	1-103741-0
⊕	⊕	.884	.800	8	9	103741-9
⊕	⊕	.784	.700	7	8	103741-8
⊕	⊕	.684	.600	6	7	103741-7
⊕	⊕	.584	.500	5	6	103741-6
⊕	⊕	.484	.400	4	5	103741-5
⊕	⊕	.384	.300	3	4	103741-4
⊕	⊕	.284	.200	2	3	103741-3
⊕	⊕	.184	.100	1	2	103741-2
⊕	⊕	.084	---	---	1	103741-1
PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY: L. RINGLEY 7-19-05	TE Connectivity	
DIMENSIONS: INCHES		OK: R. ELICKER 7-19-05	ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQ. POSTS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD: R. ELICKER 7-19-05	RESTRICTED TO	
0 PLC ± .010	1 PLC ± .008	APPLICATION SPEC: ---	SIZE: A2	CASE CODE: 103741
2 PLC ± .005	3 PLC ± .003	WEIGHT: ---	SCALE: 4:1	SHEET: 1 of 1
4 PLC ANGLES ± .010	FINISH: SEE TABLE	MATERIAL: PHOSPHOR BRONZE	CUSTOMER DRAWING	REV: H2