THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L2	REVISED PER ECO-11-004820	11MAR11	RK	HMR



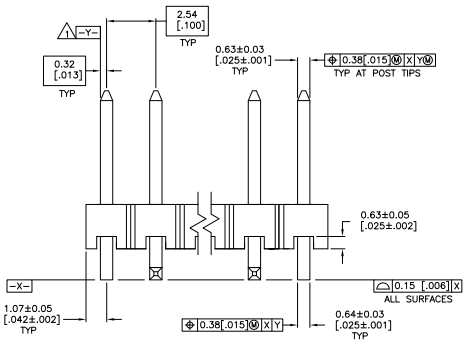

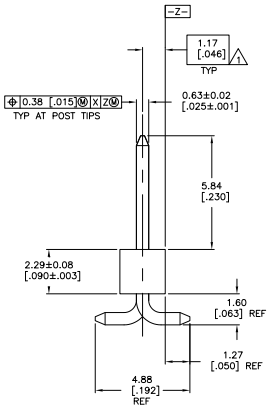

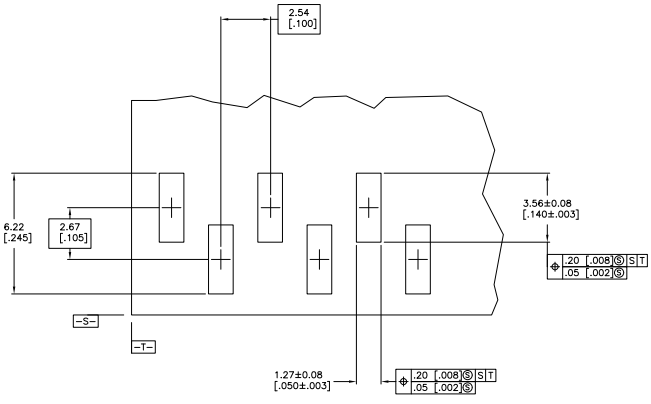

RECOMMENDED PCB LAYOUT
FOR USE WITH .008 THICK STENCIL

1. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING
2. 0.00254[.000100]-0.00508[.000200] MATTE TIN-LEAD OVER 0.00127[.000050] NICKEL ENTIRE POST
3. HOUSING: LCP, COLOR-BLACK
   POSTS: PHOSPHOR BRONZE
4. 0.00254[.000100]-0.00508[.000200] BRIGHT TIN OVER 0.00127[.000050] NICKEL ENTIRE POST.
5. PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
6. 0.00254[.000100]-0.00508[.000200] MATTE TIN OVER 0.00127[.000050] NICKEL ENTIRE POST
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		A	B	C	NO. OF POSN.	PART NUMBER
	6	35.56 [1.400]	14	37.69 [1.484]	15	6-146132-3
OBSOLETE 7	6	33.02 [1.300]	13	35.15 [1.384]	14	6-146132-2
	6	30.48 [1.200]	12	32.61 [1.284]	13	6-146132-1
	6	27.94 [1.100]	11	30.07 [1.184]	12	6-146132-0
7 OBSOLETE	6	25.40 [1.000]	10	27.53 [1.084]	11	5-146132-9
	6	22.86 [.900]	9	24.99 [.984]	10	5-146132-8
7 OBSOLETE	6	20.32 [.800]	8	22.45 [.884]	9	5-146132-7
	6	17.78 [.700]	7	19.91 [.784]	8	5-146132-6
	6	15.24 [.600]	6	17.37 [.684]	7	5-146132-5
	6	12.70 [.500]	5	14.83 [.584]	6	5-146132-4
	6	10.16 [.400]	4	12.29 [.484]	5	5-146132-3
	6	7.62 [.300]	3	9.75 [.384]	4	5-146132-2
	6	5.08 [.200]	2	7.21 [.284]	3	5-146132-1
5	4	15.24 [.600]	6	17.37 [.684]	7	1-146132-5
	2	35.56 [1.400]	14	37.69 [1.484]	15	1-146132-3
OBSOLETE 7	2	33.02 [1.300]	13	35.15 [1.384]	14	1-146132-2
	2	30.48 [1.200]	12	32.61 [1.284]	13	1-146132-1
	2	27.94 [1.100]	11	30.07 [1.184]	12	1-146132-0
7 OBSOLETE	2	25.40 [1.000]	10	27.53 [1.084]	11	146132-9
	2	22.86 [.900]	9	24.99 [.984]	10	146132-8
	2	20.32 [.800]	8	22.45 [.884]	9	146132-7
	2	17.78 [.700]	7	19.91 [.784]	8	146132-6
	2	15.24 [.600]	6	17.37 [.684]	7	146132-5
	2	12.70 [.500]	5	14.83 [.584]	6	146132-4
7 SUPERSEDED BY 5-146132-3	2	10.16 [.400]	4	12.29 [.484]	5	146132-3
	2	7.62 [.300]	3	9.75 [.384]	4	146132-2
	2	5.08 [.200]	2	7.21 [.284]	3	146132-1

PLATING	C	B	A	NO. OF POSN.	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLCS ± -
3 PLCS ± -
4 PLCS ± -
ANGLES ± 0° 30'

MATERIAL 3

FINISH SEE TABLE

DRN	J. KNOUB	ORIG/PM
CHK	G. DUBNICZKI	ORIG/PM
APVD	G. DUBNICZKI	ORIG/PM
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

TE Connectivity

NAME: SURFACE MOUNT HEADER ASSEMBLY, MOD II, BREAKAWAY, VERTICAL, SINGLE ROW, .100 C/L, .025 SQ. POST

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-146132	-

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV L2

4805 (3/11)

Downloaded from Elcodis.com electronic components distributor