
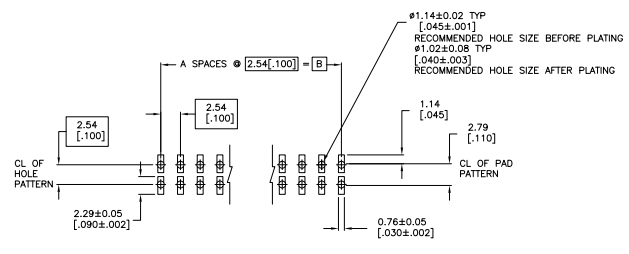
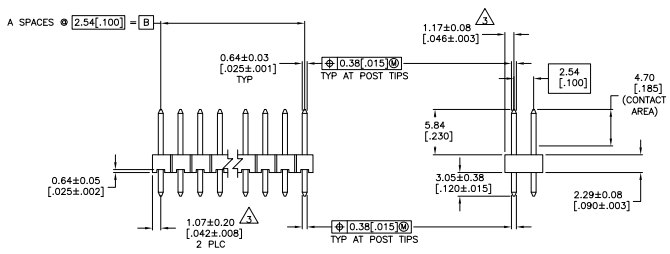


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POST PLATING: 0.00762[.00030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON SOLDERTAIL, ALL OVER 0.00127[.000050] NICKEL.
- HOUSING: LCP, COLOR-BLACK.
- POST: PHOSPHOR BRONZE
- PARTS PACKAGED IN TUBES.
- POST PLATING: 0.00762[.00030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDERTAIL, ALL OVER 0.00127[.000050] NICKEL.
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINIS



RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [1.305] STENCIL THICK.

101.19	99.08	39	80	9-146257-0
98.65	96.52	38	78	8-146257-9
96.11	93.98	37	76	8-146257-8
93.57	91.44	36	74	8-146257-7
91.03	88.90	35	72	8-146257-6
88.49	86.36	34	70	8-146257-5
85.95	83.82	33	68	8-146257-4
83.41	81.28	32	66	8-146257-3
80.87	78.74	31	64	8-146257-2
78.33	76.20	30	62	8-146257-1
75.79	73.66	29	60	8-146257-0
73.25	71.12	28	58	7-146257-9
70.71	68.58	27	56	7-146257-8
68.17	66.04	26	54	7-146257-7
65.63	63.50	25	52	7-146257-6
63.09	60.96	24	50	7-146257-5
60.55	58.42	23	48	7-146257-4
58.01	55.88	22	46	7-146257-3
55.47	53.34	21	44	7-146257-2
52.93	50.80	20	42	7-146257-1
50.39	48.26	19	40	6-146257-9
47.85	45.72	18	38	6-146257-8
45.31	43.18	17	36	6-146257-7
42.77	40.64	16	34	6-146257-6
40.23	38.10	15	32	6-146257-5
37.69	35.56	14	30	6-146257-4
35.15	33.02	13	28	6-146257-3
32.61	30.48	12	26	6-146257-2
30.07	27.94	11	24	6-146257-1
27.53	25.40	10	22	6-146257-0
24.99	22.86	9	20	5-146257-9
22.45	20.32	8	18	5-146257-8
19.91	17.78	7	16	5-146257-7
17.37	15.24	6	14	5-146257-6
14.83	12.70	5	12	5-146257-5
12.29	10.16	4	10	5-146257-4
9.75	7.62	3	8	5-146257-3
7.21	5.08	2	6	5-146257-2
4.67	2.54	1	4	5-146257-1
2.13	0.00	0	2	5-146257-0

17.37	15.24	6	14	4-146257-6
9.75	7.62	3	8	4-146257-5
7.21	5.08	2	6	4-146257-4
4.67	2.54	1	4	4-146257-3
2.13	0.00	0	2	4-146257-2
17.37	15.24	29	60	4-146257-1
101.19	99.08	39	80	4-146257-0
98.65	96.52	38	78	3-146257-9
96.11	93.98	37	76	3-146257-8
93.57	91.44	36	74	3-146257-7
91.03	88.90	35	72	3-146257-6
88.49	86.36	34	70	3-146257-5
85.95	83.82	33	68	3-146257-4
83.41	81.28	32	66	3-146257-3
80.87	78.74	31	64	3-146257-2
78.33	76.20	30	62	3-146257-1
75.79	73.66	29	60	3-146257-0
73.25	71.12	28	58	2-146257-9
70.71	68.58	27	56	2-146257-8
68.17	66.04	26	54	2-146257-7
65.63	63.50	25	52	2-146257-6
63.09	60.96	24	50	2-146257-5
60.55	58.42	23	48	2-146257-4
58.01	55.88	22	46	2-146257-3
55.47	53.34	21	44	2-146257-2
52.93	50.80	20	42	2-146257-1
50.39	48.26	19	40	2-146257-0
47.85	45.72	18	38	1-146257-9
45.31	43.18	17	36	1-146257-8
42.77	40.64	16	34	1-146257-7
40.23	38.10	15	32	1-146257-6
37.69	35.56	14	30	1-146257-5
35.15	33.02	13	28	1-146257-4
32.61	30.48	12	26	1-146257-3
30.07	27.94	11	24	1-146257-2
27.53	25.40	10	22	1-146257-1
24.99	22.86	9	20	1-146257-0
22.45	20.32	8	18	1-146257-9
19.91	17.78	7	16	146257-8
17.37	15.24	6	14	146257-7
14.83	12.70	5	12	146257-6
12.29	10.16	4	10	146257-5
9.75	7.62	3	8	146257-4
7.21	5.08	2	6	146257-3
4.67	2.54	1	4	146257-2
2.13	0.00	0	2	146257-1

THIS DRAWING IS A CONTROLLED DOCUMENT. THE ORIGINAL IS KEPT AT THE HEADQUARTERS OF THE MANUFACTURER.

TE Connectivity

HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, HIGH TEMPERATURE.

DATE: 00779G-146257

CUSTOMER DRAWING