



THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER ECD-11-004917			
A2			11MM11	RK	HMR

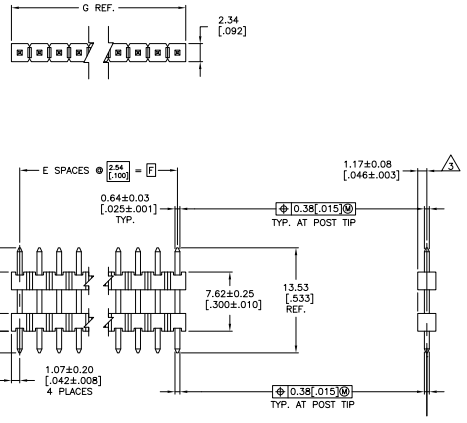

RECOMMENDED HOLE LAYOUT

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 ▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
 ▲ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN-LEAD OVER 0.00127 [0.00050] NICKEL ENTIRE POST.
 ▲ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN OVER 0.00127 [0.00050] NICKEL ENTIRE POST.

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER	
▲	101.19	99.08		39	40	9-146458-0
▲	13.984	13.900		38	39	8-146458-9
▲	98.65	96.52		37	38	8-146458-8
▲	13.784	13.700		36	37	8-146458-7
▲	96.1	92.98		35	36	8-146458-6
▲	13.584	13.500		34	35	8-146458-5
▲	91.03	88.36		33	34	8-146458-4
▲	13.384	13.300		32	33	8-146458-3
▲	85.95	83.52		31	32	8-146458-2
▲	13.184	13.100		30	31	8-146458-1
▲	83.4	81.25		29	30	8-146458-0
▲	12.984	12.900		28	29	7-146458-9
▲	74.25	71.12		27	28	7-146458-8
▲	12.784	12.700		26	27	7-146458-7
▲	68.17	66.04		25	26	7-146458-6
▲	12.584	12.500		24	25	7-146458-5
▲	65.63	63.50		23	24	7-146458-4
▲	12.384	12.300		22	23	7-146458-3
▲	59.47	57.34		21	22	7-146458-2
▲	12.184	12.100		20	21	7-146458-1
▲	57.03	54.90		19	20	7-146458-0
▲	11.984	11.900		18	19	6-146458-9
▲	47.85	45.72		17	18	6-146458-8
▲	11.784	11.700		16	17	6-146458-7
▲	45.3	43.18		15	16	6-146458-6
▲	11.584	11.500		14	15	6-146458-5
▲	42.85	40.72		13	14	6-146458-4
▲	11.384	11.300		12	13	6-146458-3
▲	40.3	38.18		11	12	6-146458-2
▲	11.184	11.100		10	11	6-146458-1
▲	37.85	35.72		9	10	6-146458-0
▲	10.984	10.900		8	9	5-146458-9
▲	35.3	33.18		7	8	5-146458-8
▲	10.784	10.700		6	7	5-146458-7
▲	32.85	30.72		5	6	5-146458-6
▲	10.584	10.500		4	5	5-146458-5
▲	30.3	28.18		3	4	5-146458-4
▲	10.384	10.300		2	3	5-146458-3
▲	27.85	25.72		1	2	5-146458-2
▲	10.184	10.100		-	1	5-146458-1
▲	25.3	23.18		-	1	5-146458-0

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER	
▲	101.19	99.08		39	40	4-146458-0
▲	13.984	13.900		38	39	3-146458-9
▲	98.65	96.52		37	38	3-146458-8
▲	13.784	13.700		36	37	3-146458-7
▲	96.1	92.98		35	36	3-146458-6
▲	13.584	13.500		34	35	3-146458-5
▲	91.03	88.36		33	34	3-146458-4
▲	13.384	13.300		32	33	3-146458-3
▲	85.95	83.52		31	32	3-146458-2
▲	13.184	13.100		30	31	3-146458-1
▲	83.4	81.25		29	30	3-146458-0
▲	12.984	12.900		28	29	2-146458-9
▲	74.25	71.12		27	28	2-146458-8
▲	12.784	12.700		26	27	2-146458-7
▲	68.17	66.04		25	26	2-146458-6
▲	12.584	12.500		24	25	2-146458-5
▲	65.63	63.50		23	24	2-146458-4
▲	12.384	12.300		22	23	2-146458-3
▲	59.47	57.34		21	22	2-146458-2
▲	12.184	12.100		20	21	2-146458-1
▲	57.03	54.90		19	20	2-146458-0
▲	11.984	11.900		18	19	1-146458-9
▲	47.85	45.72		17	18	1-146458-8
▲	11.784	11.700		16	17	1-146458-7
▲	45.3	43.18		15	16	1-146458-6
▲	11.584	11.500		14	15	1-146458-5
▲	42.85	40.72		13	14	1-146458-4
▲	11.384	11.300		12	13	1-146458-3
▲	40.3	38.18		11	12	1-146458-2
▲	11.184	11.100		10	11	1-146458-1
▲	37.85	35.72		9	10	1-146458-0
▲	10.984	10.900		8	9	146458-9
▲	35.3	33.18		7	8	146458-8
▲	10.784	10.700		6	7	146458-7
▲	32.85	30.72		5	6	146458-6
▲	10.584	10.500		4	5	146458-5
▲	30.3	28.18		3	4	146458-4
▲	10.384	10.300		2	3	146458-3
▲	27.85	25.72		1	2	146458-2
▲	10.184	10.100		-	1	146458-1
▲	25.3	23.18		-	1	146458-0

THIS DRAWING IS A CONTROLLED DOCUMENT. **TE Connectivity**

DIMENSIONS: (mm) (INCHES)
 DIMENSIONS: (mm) (INCHES)
 DIMENSIONS: (mm) (INCHES)
 DIMENSIONS: (mm) (INCHES)

DATE: 00779
 CUSTOMER DRAWING: G=146458
 SHEET: 4.1 OF 1