



THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER EDD-11-04620	11MR11	RK	HMR

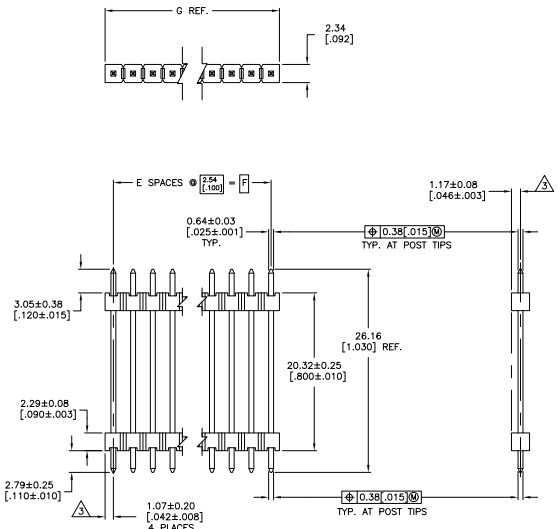

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
  - FINISH: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN-LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
  - FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER	
△	101.18	99.08		39	40	9-146468-0
△	13.984	3.900		38	39	8-146468-9
△	98.65	96.52		37	38	8-146468-8
△	95.11	93.98		36	37	8-146468-7
△	13.684	3.600		35	36	8-146468-6
△	85.95	83.82		34	35	8-146468-5
△	13.384	3.300		33	34	8-146468-4
△	82.41	80.28		32	33	8-146468-3
△	80.87	78.74		31	32	8-146468-2
△	13.084	3.000		30	31	8-146468-1
△	78.27	76.14		29	30	8-146468-0
△	12.784	2.700		28	29	7-146468-9
△	74.73	72.60		27	28	7-146468-8
△	72.19	70.06		26	27	7-146468-7
△	65.63	63.50		25	26	7-146468-6
△	12.484	2.400		24	25	7-146468-5
△	63.09	60.96		23	24	7-146468-4
△	12.184	2.100		22	23	7-146468-3
△	59.55	57.42		21	22	7-146468-2
△	11.884	1.800		20	21	7-146468-1
△	56.01	53.88		19	20	7-146468-0
△	11.584	1.500		18	19	6-146468-9
△	52.47	50.34		17	18	6-146468-8
△	11.284	1.200		16	17	6-146468-7
△	48.93	46.80		15	16	6-146468-6
△	10.984	1.000		14	15	6-146468-5
△	45.39	43.26		13	14	6-146468-4
△	10.684	0.900		12	13	6-146468-3
△	41.85	39.72		11	12	6-146468-2
△	10.384	0.800		10	11	6-146468-1
△	38.31	36.18		9	10	6-146468-0
△	10.084	0.700		8	9	5-146468-9
△	34.77	32.64		7	8	5-146468-8
△	9.784	0.600		6	7	5-146468-7
△	31.23	29.10		5	6	5-146468-6
△	9.484	0.500		4	5	5-146468-5
△	27.69	25.56		3	4	5-146468-4
△	9.184	0.400		2	3	5-146468-3
△	24.15	22.02		1	2	5-146468-2
△	8.884	0.300		-	1	5-146468-1

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER	
△	101.18	99.08		39	40	4-146468-0
△	13.984	3.900		38	39	3-146468-9
△	98.65	96.52		37	38	3-146468-8
△	95.11	93.98		36	37	3-146468-7
△	13.684	3.600		35	36	3-146468-6
△	85.95	83.82		34	35	3-146468-5
△	13.384	3.300		33	34	3-146468-4
△	82.41	80.28		32	33	3-146468-3
△	80.87	78.74		31	32	3-146468-2
△	13.084	3.000		30	31	3-146468-1
△	78.27	76.14		29	30	3-146468-0
△	12.784	2.700		28	29	2-146468-9
△	74.73	72.60		27	28	2-146468-8
△	72.19	70.06		26	27	2-146468-7
△	65.63	63.50		25	26	2-146468-6
△	12.484	2.400		24	25	2-146468-5
△	63.09	60.96		23	24	2-146468-4
△	12.184	2.100		22	23	2-146468-3
△	59.55	57.42		21	22	2-146468-2
△	11.884	1.800		20	21	2-146468-1
△	56.01	53.88		19	20	2-146468-0
△	11.584	1.500		18	19	1-146468-9
△	52.47	50.34		17	18	1-146468-8
△	11.284	1.200		16	17	1-146468-7
△	48.93	46.80		15	16	1-146468-6
△	10.984	1.000		14	15	1-146468-5
△	45.39	43.26		13	14	1-146468-4
△	10.684	0.900		12	13	1-146468-3
△	41.85	39.72		11	12	1-146468-2
△	10.384	0.800		10	11	1-146468-1
△	38.31	36.18		9	10	1-146468-0
△	10.084	0.700		8	9	146468-9
△	34.77	32.64		7	8	146468-8
△	9.784	0.600		6	7	146468-7
△	31.23	29.10		5	6	146468-6
△	9.484	0.500		4	5	146468-5
△	27.69	25.56		3	4	146468-4
△	9.184	0.400		2	3	146468-3
△	24.15	22.02		1	2	146468-2
△	8.884	0.300		-	1	146468-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. IT IS TO BE KEPT IN CONFIDENCE AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

TE Connectivity  
 TE CONNECTIVITY  
 TE CONNECTIVITY

DATE: 11/07/09  
 DRAWING NO: 00779G=146468  
 CUSTOMER DRAWING

REVISED PER EDD-11-04620