



REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
A1		REVISED PER ECO-11-004820			

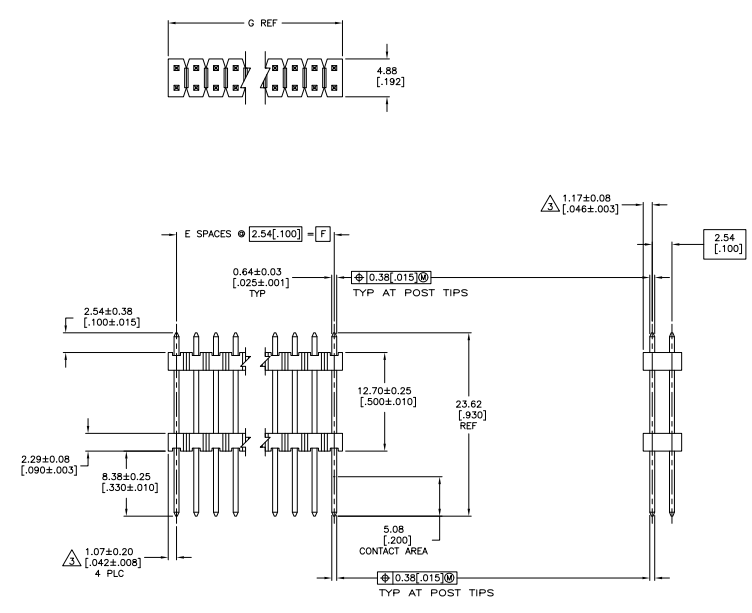

RECOMMENDED HOLE LAYOUT

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- △ FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.00100-0.00200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [0.00050] NICKEL ENTIRE POST.
- △ FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.00100-0.00200] MATTE TIN ON SOLDER TAIL, 0.00127 [0.00050] NICKEL ENTIRE POST.

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.		AD	00				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		TE Connectivity					
FRACTIONS		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ POST, UNDERGROUDED					
DECIMALS		DATE					
ANGLES		DRAWING NO					
HOLE LOCATIONS		A1 00779 G=146494					
HOLE DIAMETERS		REV					
HOLE SPACINGS		1 2 A1					
HOLE DRILLING		CUSTOMER DRAWING					

