


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		RELEASED			

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- △ FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.

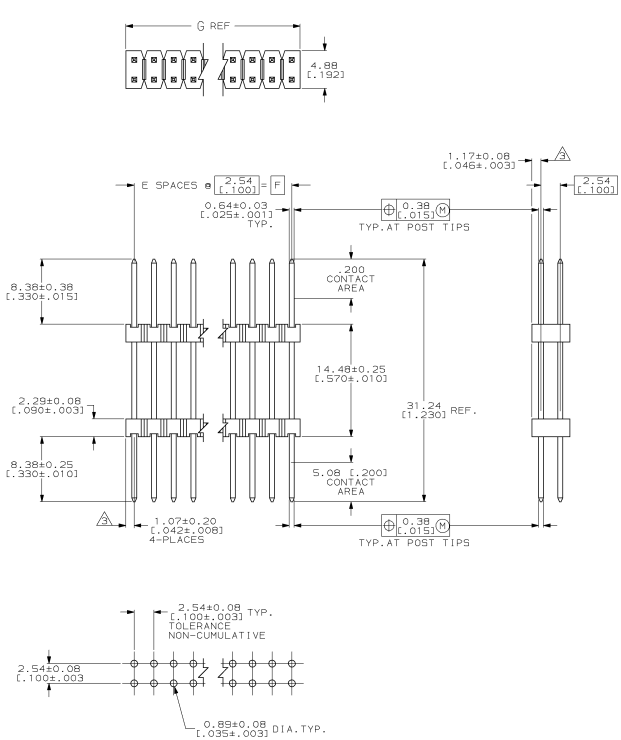

RECOMMENDED HOLE LAYOUT

NO.	REV	DATE	DESCRIPTION	BY	CHK	APP
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						
31						
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						
42						
43						
44						
45						
46						
47						
48						
49						
50						
51						
52						
53						
54						
55						
56						
57						
58						
59						
60						
61						
62						
63						
64						
65						
66						
67						
68						
69						
70						
71						
72						
73						
74						
75						
76						
77						
78						
79						
80						

AMP Incorporated
 Harrisburg, PA 17105-3608

AMP
 HEADERS ASSEMBLY, MOD 11,
 STACKING, DOUBLE ROW,
 .025 SQ. POST, UNSHROUDED

REV: 1
 DATE: 11-REV-98
 BY: EB
 CHK: CD

AMP 1750-3 REV 10-84
 13-16-03 amp1825 Rev/rev/036/0981/amp121/amp1825/01.com/1