


REV	DATE	BY	CHK	DESCRIPTION	DATE	BY	CHK
AD 00				REVISED PER EDD-11-004820	11MAR11	RK	HMR

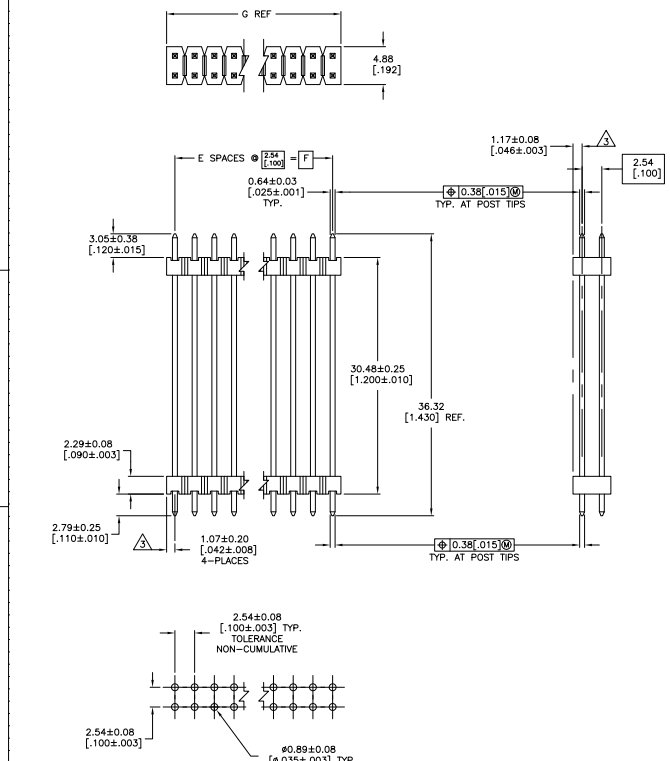

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
△	101.19	99.06	39	80	9-146508-0
△	3.984	3.900	38	78	8-146508-9
△	3.884	3.800	37	76	8-146508-8
△	96.11	93.98	36	74	8-146508-7
△	3.784	3.700	35	72	8-146508-6
△	93.57	91.44	34	70	8-146508-5
△	3.584	3.500	33	68	8-146508-4
△	85.95	83.82	32	66	8-146508-3
△	3.484	3.400	31	64	8-146508-2
△	83.41	81.28	30	62	8-146508-1
△	3.284	3.200	29	60	8-146508-0
△	80.87	78.74	28	58	7-146508-9
△	3.184	3.100	27	56	7-146508-8
△	78.33	76.20	26	54	7-146508-7
△	3.084	3.000	25	52	7-146508-6
△	75.79	73.66	24	50	7-146508-5
△	2.984	2.900	23	48	7-146508-4
△	73.25	71.12	22	46	7-146508-3
△	2.884	2.800	21	44	7-146508-2
△	70.71	68.58	20	42	7-146508-1
△	2.784	2.700	19	40	7-146508-0
△	68.17	66.04	18	38	6-146508-9
△	2.684	2.600	17	36	6-146508-8
△	65.63	63.50	16	34	6-146508-7
△	2.584	2.500	15	32	6-146508-6
△	63.09	60.96	14	30	6-146508-5
△	2.484	2.400	13	28	6-146508-4
△	60.55	58.42	12	26	6-146508-3
△	2.384	2.300	11	24	6-146508-2
△	58.01	55.88	10	22	6-146508-1
△	2.284	2.200	9	20	6-146508-0
△	55.47	53.34	8	18	5-146508-9
△	2.184	2.100	7	16	5-146508-8
△	52.93	50.80	6	14	5-146508-7
△	2.084	2.000	5	12	5-146508-6
△	50.39	48.26	4	10	5-146508-5
△	1.984	1.900	3	8	5-146508-4
△	47.85	45.72	2	6	5-146508-3
△	1.784	1.700	1	4	5-146508-2
△	45.31	43.18	-	2	5-146508-1
△	1.684	1.600	-	-	-
△	42.77	40.64	-	-	-
△	1.584	1.500	-	-	-
△	40.23	38.10	-	-	-
△	1.484	1.400	-	-	-
△	37.69	35.56	-	-	-
△	1.384	1.300	-	-	-
△	35.15	33.02	-	-	-
△	1.284	1.200	-	-	-
△	32.61	30.48	-	-	-
△	1.184	1.100	-	-	-
△	30.07	27.94	-	-	-
△	1.084	1.000	-	-	-
△	27.53	25.40	-	-	-
△	1.084	1.000	-	-	-
△	24.99	22.86	-	-	-
△	0.984	0.900	-	-	-
△	22.45	20.32	-	-	-
△	0.884	0.800	-	-	-
△	19.91	17.78	-	-	-
△	0.784	0.700	-	-	-
△	17.37	15.24	-	-	-
△	0.684	0.600	-	-	-
△	14.83	12.70	-	-	-
△	0.584	0.500	-	-	-
△	12.29	10.16	-	-	-
△	0.484	0.400	-	-	-
△	9.75	7.62	-	-	-
△	0.384	0.300	-	-	-
△	7.21	5.08	-	-	-
△	0.284	0.200	-	-	-
△	4.67	2.54	-	-	-
△	0.184	0.100	-	-	-
△	2.13	0.00	-	-	-
△	0.084	0.00	-	-	-

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
△	101.19	99.06	39	80	4-146508-0
△	3.984	3.900	38	78	3-146508-9
△	3.884	3.800	37	76	3-146508-8
△	96.11	93.98	36	74	3-146508-7
△	3.784	3.700	35	72	3-146508-6
△	93.57	91.44	34	70	3-146508-5
△	3.584	3.500	33	68	3-146508-4
△	85.95	83.82	32	66	3-146508-3
△	3.484	3.400	31	64	3-146508-2
△	83.41	81.28	30	62	3-146508-1
△	3.284	3.200	29	60	3-146508-0
△	80.87	78.74	28	58	2-146508-9
△	3.184	3.100	27	56	2-146508-8
△	78.33	76.20	26	54	2-146508-7
△	3.084	3.000	25	52	2-146508-6
△	75.79	73.66	24	50	2-146508-5
△	2.984	2.900	23	48	2-146508-4
△	73.25	71.12	22	46	2-146508-3
△	2.884	2.800	21	44	2-146508-2
△	70.71	68.58	20	42	2-146508-1
△	2.784	2.700	19	40	2-146508-0
△	68.17	66.04	18	38	1-146508-9
△	2.684	2.600	17	36	1-146508-8
△	65.63	63.50	16	34	1-146508-7
△	2.584	2.500	15	32	1-146508-6
△	63.09	60.96	14	30	1-146508-5
△	2.484	2.400	13	28	1-146508-4
△	60.55	58.42	12	26	1-146508-3
△	2.384	2.300	11	24	1-146508-2
△	58.01	55.88	10	22	1-146508-1
△	2.284	2.200	9	20	1-146508-0
△	55.47	53.34	8	18	146508-9
△	2.184	2.100	7	16	146508-8
△	52.93	50.80	6	14	146508-7
△	2.084	2.000	5	12	146508-6
△	50.39	48.26	4	10	146508-5
△	1.984	1.900	3	8	146508-4
△	47.85	45.72	2	6	146508-3
△	1.784	1.700	1	4	146508-2
△	45.31	43.18	-	2	146508-1
△	1.684	1.600	-	-	-
△	42.77	40.64	-	-	-
△	1.584	1.500	-	-	-
△	40.23	38.10	-	-	-
△	1.484	1.400	-	-	-
△	37.69	35.56	-	-	-
△	1.384	1.300	-	-	-
△	35.15	33.02	-	-	-
△	1.284	1.200	-	-	-
△	32.61	30.48	-	-	-
△	1.184	1.100	-	-	-
△	30.07	27.94	-	-	-
△	1.084	1.000	-	-	-
△	27.53	25.40	-	-	-
△	1.084	1.000	-	-	-
△	24.99	22.86	-	-	-
△	0.984	0.900	-	-	-
△	22.45	20.32	-	-	-
△	0.884	0.800	-	-	-
△	19.91	17.78	-	-	-
△	0.784	0.700	-	-	-
△	17.37	15.24	-	-	-
△	0.684	0.600	-	-	-
△	14.83	12.70	-	-	-
△	0.584	0.500	-	-	-
△	12.29	10.16	-	-	-
△	0.484	0.400	-	-	-
△	9.75	7.62	-	-	-
△	0.384	0.300	-	-	-
△	7.21	5.08	-	-	-
△	0.284	0.200	-	-	-
△	4.67	2.54	-	-	-
△	0.184	0.100	-	-	-
△	2.13	0.00	-	-	-
△	0.084	0.00	-	-	-

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
 - △ HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR, BLACK.
 - △ FINISH: 0.00254-0.00508 [0.00100-0.00200] BRIGHT TIN-LEAD OVER 0.00127[0.00050] NICKEL ENTIRE POST.
 - △ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN OVER 0.00127[0.00050] NICKEL ENTIRE POST.

THIS DRAWING IS A CONTROLLED DOCUMENT. REV. 1 (12-20-04) DATE 12-20-04

TE Connectivity

TE Connectivity
 HEADERS ASSEMBLY, MOD II,
 STACKING, DOUBLE ROW,
 .025 SQ. POST, UNSHROUDED

DATE 00779 G=146508

CUSTOMER DRAWING