


SECT. "A"-A"

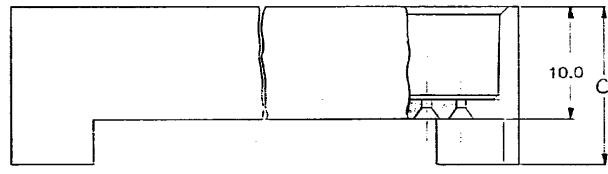

SECT. "B"-B"

注記

1. 材料 กระจก PBT UL 94V-0. 黒
2. 製品規格 108-5197
3. ホードはリセパブル・アセンブリを基板に取り付けた後、ホード側には裏面、次のリセパブル・アセンブリと嵌合させる。
0.60DIAは両側16ホールのみ適用。0.60DIAは除く。

△ OBSOLETE	48.26	55.9	19.40	3	8
	40.64	48.3	16.34	1	-4
	30.48	38.1	12.26	1	-3
	73.66	81.3	29.60	1	-0
	65.96	68.6	24.50		-9
	48.26	55.9	19.40		-8
	15.6	33.56	12.30		-7
△ OBSOLETE	40.64	48.3	16.34	1	-2
△ OBSOLETE	30.48	38.1	12.26	1	-1
	73.66	81.3	29.60		-5
	65.96	68.6	24.50		-4
	48.26	55.9	19.40		-3
	10.0	33.56	12.30		173144 -2

NOTES:

1. HSG MATERIAL; PBT (GLASS), UL 94V-0, BLK
 2. PRODUCT SPEC; 108-5197
 3. THIS HSG SHALL BE ASSEMBLED WITH POST CONTACT OF REC ASSY AFTER INSERTED ONTO P.C BOARD.
- △ 0.60DIA APPLY TO 16 HOLES ON BOTH SIDES, EXCEPT PIN 3-18.
- △ OBSOLETE PARTS; OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C1: ECO-10-000444		KK AEG JMBH	
C: 品番 J-100044 T/F K/S		MATERIAL: PBT	
B: 仕様 J-100044 K/S		DR: K/S 12/17/98	
A: 色 黒		CHK: J/S	
D: 作 業 書		APP: J/S	
LTR: REVISION RECORDS OR CHK DATE		DATE: 12/17/98	

10845 0000-0000-0000	10845 0000-0000-0000	10845 0000-0000-0000	10845 0000-0000-0000
AMPHENOL ELECTRONICS	AMPHENOL ELECTRONICS	AMPHENOL ELECTRONICS	AMPHENOL ELECTRONICS
ALL RIGHTS RESERVED. AMPHENOL ELECTRONICS IS A REGISTERED TRADEMARK OF AMPHENOL ELECTRONICS.	ALL RIGHTS RESERVED. AMPHENOL ELECTRONICS IS A REGISTERED TRADEMARK OF AMPHENOL ELECTRONICS.	ALL RIGHTS RESERVED. AMPHENOL ELECTRONICS IS A REGISTERED TRADEMARK OF AMPHENOL ELECTRONICS.	ALL RIGHTS RESERVED. AMPHENOL ELECTRONICS IS A REGISTERED TRADEMARK OF AMPHENOL ELECTRONICS.

ECO-10-000444	ECO-10-000444	ECO-10-000444	ECO-10-000444
ECO-10-000444	ECO-10-000444	ECO-10-000444	ECO-10-000444
ECO-10-000444	ECO-10-000444	ECO-10-000444	ECO-10-000444
ECO-10-000444	ECO-10-000444	ECO-10-000444	ECO-10-000444

(CUSTOMER DRAWING) 参考図面

PRINT DIST. 9.11.11. LAMINATING IN WHI DO NOT SCALE PRINT.