THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

UOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DRN	APVD
	G1	REVISED PER ECO-08-039182	22APR08	DH	AS

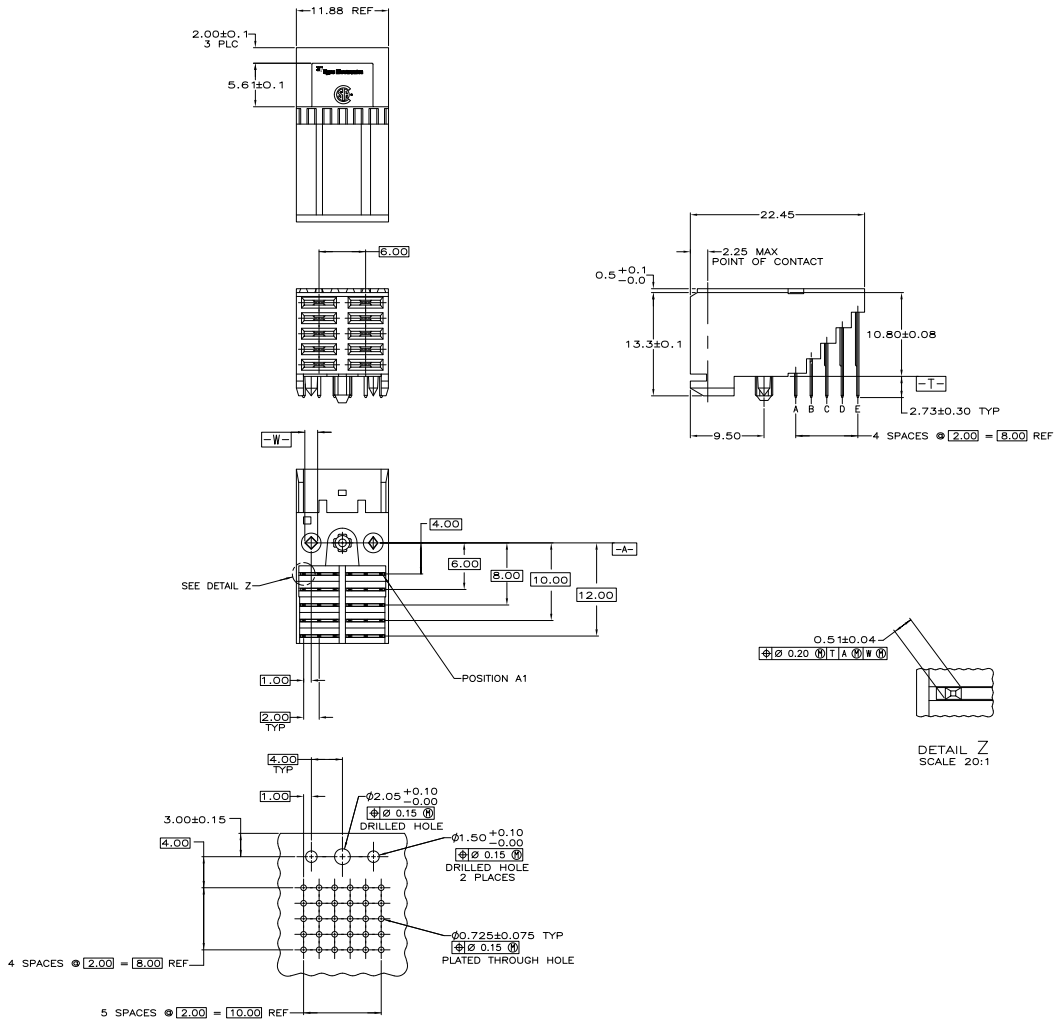

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS 3
COMPONENT SIDE

1. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
   COLOR: NATURAL.
2. CONTACT MATERIAL: PHOSPHOR BRONZE.
3. CONTACT FINISH:
   UNDERPLATE (ENTIRE CONTACT):
   0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
   ON MATING SURFACES:
   FLASH GOLD PER ASTM B 488, OVER
   0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
   0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
   ON LEADS:
   0.00381 MIN TIN-LEAD OVER UNDERPLATE.
   LUBRICATION (MIN MATING SURFACES)
   SURFACE CONDITIONER AFTER PLATING.

3	223092-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCE UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± 0.051
4 PLC ± –
ANGLES ± –

MATERIAL 1 2
FINISH 3

DR T. SHUEY 11-3-08
CK C. SCHMID 11-12-08
APVD C. SCHMID 11-12-08
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –
CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME
RCPT ASSEMBLY,POWER,Z-PACK 2mm FB,
10 POSITION,RIGHT ANGLE,SOLDER LEADS
– –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-223092	–

SCALE 4:1 SHEET 1 OF 1 REV G1

AMP 4805 REV 31MAR2000

22APR2008 ua077239

Downloaded from Elcodis.com electronic components distributor