

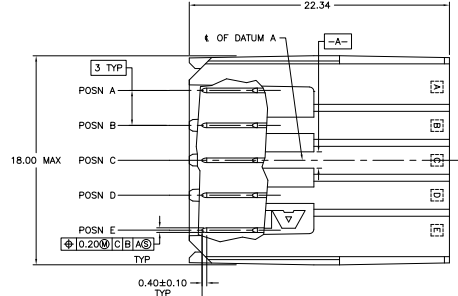




THIS DRAWING IS UNPUBLISHED. ALL INFORMATION IS UNCLASSIFIED. UNLESS INDICATED OTHERWISE.


REVISED		REVISIONS	
AD	00	DESCRIPTION	DATE
		E	REVISED PER EDD-11-00046
			04MAR11 DH DY

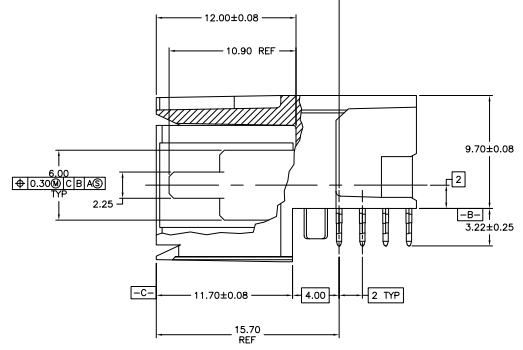

- △ MATERIAL: HOUSING: POLYESTER, GRAY, UL 94V-0.  
CONTACT: HIGH CURRENT COPPER-ALLOY.
  - △ FINISH: CONTACT MATING AREA: 1.27µm MIN GOLD OR 0.08µm MIN GOLD OVER  
0.76µm MIN PALLADIUM-NICKEL  
ACTION PIN AREA: 0.5µm MIN MATTE TIN PLATE,  
ALL OVER 1.27µm MIN NICKEL UNDERPLATE.
  - △ FINISH: CONTACT LUBRICATION WITH BELLECORE APPROVED  
LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1,  
NOVEMBER 1995.
  - △ 10.26 ± 0.13 DIMENSION APPLIES IN THIS AREA.
  - △ REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED  
PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
6. CURRENT RATING 16A/CONTACT PER PRODUCT SPEC 108-1651.



SECTION W-W  
SCALE 40:1

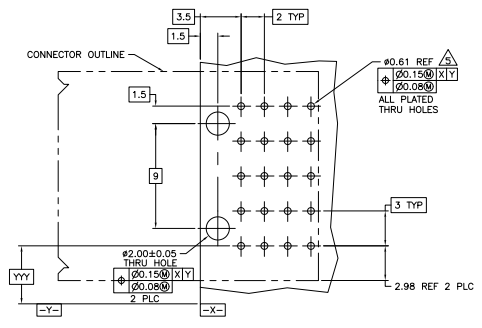

RECOMMENDED PCB HOLE LAYOUT

120955-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		C. CASRO 120955		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
REVISION	DATE	BY	CHKD	APP'D	DESCRIPTION
1					ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PEGS, UNIVERSAL POWER MODULE
2					
3					
4					
5					
6					
7					
8					
9					
10					
DRAWN BY		CHECKED BY		DATE	
A1		00779		G=120955	
CUSTOMER DRAWING		REVISED PER EDD-11-00046		REVISED BY	
				E	

488 (1/88)