

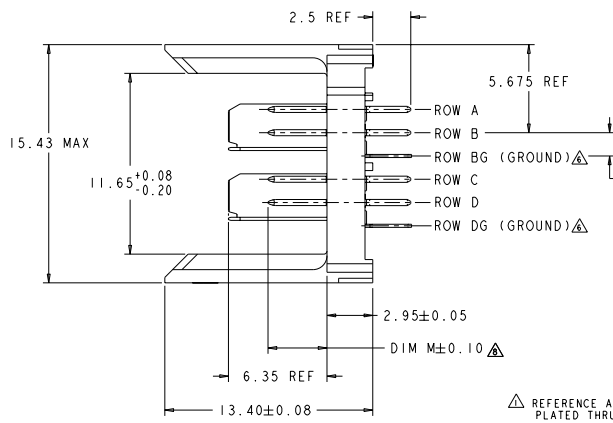
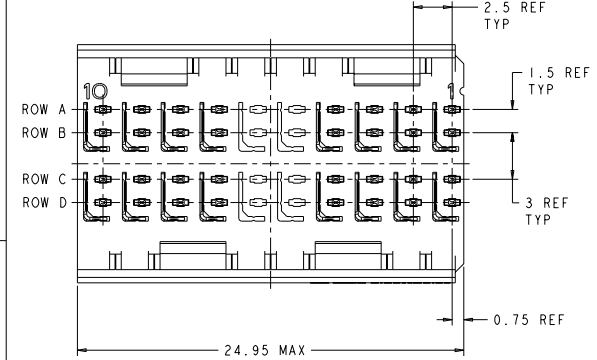


REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01		REVISED PER ECO-12-000118			

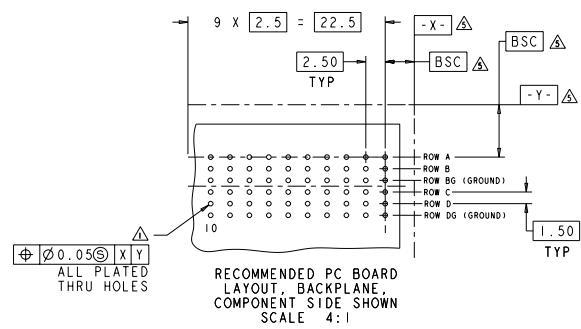

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:  
CONTACT AND SHIELD - PHOSPHOR BRONZE  
HOUSING - GLASS FILLED POLYESTER UL 94V-0.
- △ FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFER TO "CONTACT LAYOUT" CHART FOR SEQUENCING.

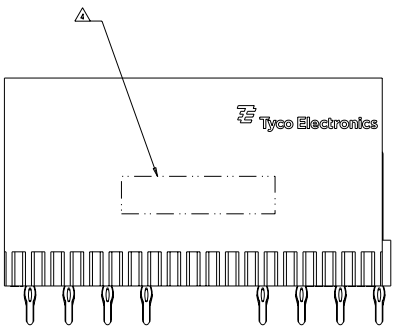

CONTACT LAYOUT										
A = 3.80mm (DIM M)										
B = 5.30mm (DIM M)										
G = GROUND										
COLUMNS										
	10	9	8	7	6	5	4	3	2	1
ROWS	A	A	A	A	A			A	A	A
B	A	A	A	A				A	A	A
BG	G	G	G	G				G	G	G
C	A	A	A	A				A	A	A
D	A	A	A	A				A	A	A
DG	G	G	G	G				G	G	G

1469054-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: J. WARD  
 DRAWN BY: J. SCHOLL  
 CHECKED BY: J. PATTERSON  
 DATE: 12/12/2012

TE Connectivity

HEADER ASSEMBLY, 2 PAIR, SELECTIVELY LOADED, 2.0mm TAIL, 2.0mm, HWZ4

STATE CASE CODE (DRAWING NO): A 00779 ©-1469054

CUSTOMER DRAWING

SCALE: 2:1