


RECOMMENDED HOLE LAYOUT

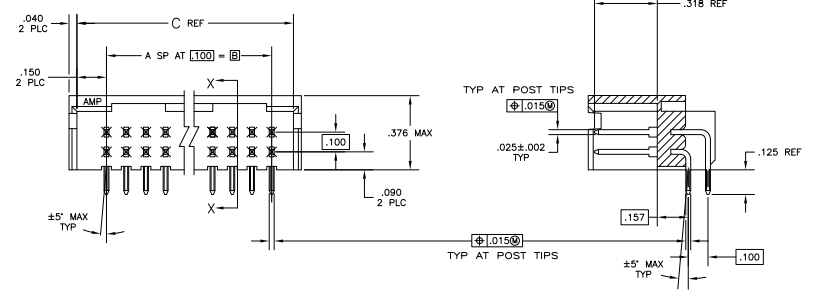

SECTION X-X

- △ ACCESS SLOT.
- △ CONTACT: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- △ CONTACT: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	C	B	A	NO OF POSN	PART NUMBER
△	3.200	2.900	29	60	7-87568-6
△	2.700	2.400	24	50	7-87568-1
△	2.200	1.900	19	40	6-87568-6
△	1.900	1.600	16	34	6-87568-3
△	1.500	1.200	12	26	5-87568-9
△	1.200	.900	9	20	5-87568-6
△	1.100	.800	8	18	5-87568-5
△	1.000	.700	7	16	5-87568-4
△	.900	.600	6	14	5-87568-3
△	.800	.500	5	12	5-87568-2
△	.700	.400	4	10	5-87568-1
△	3.800	3.500	35	72	3-87568-2
△	3.700	3.400	34	70	3-87568-1
△	3.600	3.300	33	68	3-87568-0
△	3.500	3.200	32	66	2-87568-9
△	3.400	3.100	31	64	2-87568-8
△	3.300	3.000	30	62	2-87568-7
△	3.200	2.900	29	60	2-87568-6
△	3.100	2.800	28	58	2-87568-5
△	3.000	2.700	27	56	2-87568-4
△	2.900	2.600	26	54	2-87568-3
△	2.800	2.500	25	52	2-87568-2
△	2.700	2.400	24	50	2-87568-1
△	2.600	2.300	23	48	2-87568-0
△	2.500	2.200	22	46	1-87568-9
△	2.400	2.100	21	44	1-87568-8
△	2.300	2.000	20	42	1-87568-7
△	2.200	1.900	19	40	1-87568-6
△	2.100	1.800	18	38	1-87568-5
△	2.000	1.700	17	36	1-87568-4
△	1.900	1.600	16	34	1-87568-3
△	1.800	1.500	15	32	1-87568-2
△	1.700	1.400	14	30	1-87568-1
△	1.600	1.300	13	28	1-87568-0
△	1.500	1.200	12	26	87568-9
△	1.400	1.100	11	24	87568-8
△	1.300	1.000	10	22	87568-7
△	1.200	.900	9	20	87568-6
△	1.100	.800	8	18	87568-5
△	1.000	.700	7	16	87568-4
△	.900	.600	6	14	87568-3
△	.800	.500	5	12	87568-2
△	.700	.400	4	10	87568-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS: 110190

DATE: 05/11/05

BY: J. ELICKER

APPROVED: [Signature]

DESCRIPTION: HEADER ASSY, MOD H, DEL ROW, .100X.100 C/L RIGHT ANGLE, (3) SPOOD SHROUD

PLATING: C B A

CUSTOMER DRAWING: A100779 C=87568

DATE: 05/11/05

SIZE: 4.1

SHEET: 1 of 1

SCALE: 1:1