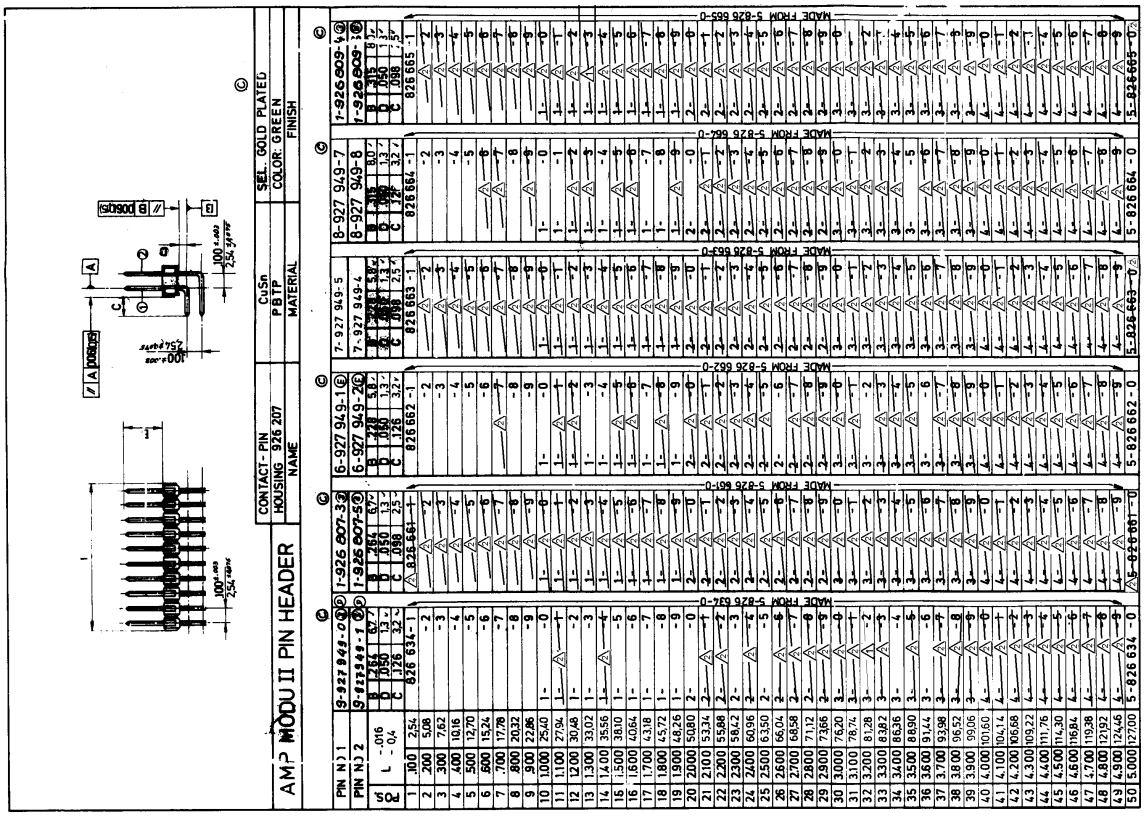

POS	L - .016 / L - .04	PIN NO 1	PIN NO 2	826 634-1	826 661-1	826 662-1	826 663-1	826 664-1	826 665-1
		1-927 949-0	1-927 949-1	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		8-927 949-0	8-927 949-1	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		6-927 949-0	6-927 949-1	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		7-927 949-0	7-927 949-4	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		1-926 609-0	1-926 609-1	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		1-926 607-3	1-926 607-5	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		9-927 949-0	9-927 949-1	5-826 634-0	5-826 661-0	5-826 662-0	5-826 663-0	5-826 664-0	5-826 665-0
		B .264 6.7	B .264 6.7						
		D .050 1.3	D .050 1.3						
		C .126 3.2	C .126 3.2						
1	.100 2.54			-2	-2	-2	-2	-2	-2
2	.200 5.08			-3	-3	-3	-3	-3	-3
3	.300 7.62			-4	-4	-4	-4	-4	-4
4	.400 10.16			-5	-5	-5	-5	-5	-5
5	.500 12.70			-6	-6	-6	-6	-6	-6
6	.600 15.24			-7	-7	-7	-7	-7	-7
7	.700 17.78			-8	-8	-8	-8	-8	-8
8	.800 20.32			-9	-9	-9	-9	-9	-9
9	.900 22.86			-0	-0	-0	-0	-0	-0
10	1.000 25.40	1-	1-	-1	-1	-1	-1	-1	-1
11	1.100 27.94	1-	1-	-2	-2	-2	-2	-2	-2
12	1.200 30.48	1-	1-	-3	-3	-3	-3	-3	-3
13	1.300 33.02	1-	1-	-4	-4	-4	-4	-4	-4
14	1.400 35.56	1-	1-	-5	-5	-5	-5	-5	-5
15	1.500 38.10	1-	1-	-6	-6	-6	-6	-6	-6
16	1.600 40.64	1-	1-	-7	-7	-7	-7	-7	-7
17	1.700 43.18	1-	1-	-8	-8	-8	-8	-8	-8
18	1.800 45.72	1-	1-	-9	-9	-9	-9	-9	-9
19	1.900 48.26	1-	1-	-0	-0	-0	-0	-0	-0
20	2.000 50.80	2-	2-	-1	-1	-1	-1	-1	-1
21	2.100 53.34	2-	2-	-2	-2	-2	-2	-2	-2
22	2.200 55.88	2-	2-	-3	-3	-3	-3	-3	-3
23	2.300 58.42	2-	2-	-4	-4	-4	-4	-4	-4
24	2.400 60.96	2-	2-	-5	-5	-5	-5	-5	-5
25	2.500 63.50	2-	2-	-6	-6	-6	-6	-6	-6
26	2.600 66.04	2-	2-	-7	-7	-7	-7	-7	-7
27	2.700 68.58	2-	2-	-8	-8	-8	-8	-8	-8
28	2.800 71.12	2-	2-	-9	-9	-9	-9	-9	-9
29	2.900 73.66	2-	2-	-0	-0	-0	-0	-0	-0
30	3.000 76.20	3-	3-	-1	-1	-1	-1	-1	-1
31	3.100 78.74	3-	3-	-2	-2	-2	-2	-2	-2
32	3.200 81.28	3-	3-	-3	-3	-3	-3	-3	-3
33	3.300 83.82	3-	3-	-4	-4	-4	-4	-4	-4
34	3.400 86.36	3-	3-	-5	-5	-5	-5	-5	-5
35	3.500 88.90	3-	3-	-6	-6	-6	-6	-6	-6
36	3.600 91.44	3-	3-	-7	-7	-7	-7	-7	-7
37	3.700 93.98	3-	3-	-8	-8	-8	-8	-8	-8
38	3.800 96.52	3-	3-	-9	-9	-9	-9	-9	-9
39	3.900 99.06	3-	3-	-0	-0	-0	-0	-0	-0
40	4.000 101.60	4-	4-	-1	-1	-1	-1	-1	-1
41	4.100 104.14	4-	4-	-2	-2	-2	-2	-2	-2
42	4.200 106.68	4-	4-	-3	-3	-3	-3	-3	-3
43	4.300 109.22	4-	4-	-4	-4	-4	-4	-4	-4
44	4.400 111.76	4-	4-	-5	-5	-5	-5	-5	-5
45	4.500 114.30	4-	4-	-6	-6	-6	-6	-6	-6
46	4.600 116.84	4-	4-	-7	-7	-7	-7	-7	-7
47	4.700 119.38	4-	4-	-8	-8	-8	-8	-8	-8
48	4.800 121.92	4-	4-	-9	-9	-9	-9	-9	-9
49	4.900 124.46	4-	4-	-0	-0	-0	-0	-0	-0
50	5.000 127.00	5-	5-	-0	-0	-0	-0	-0	-0

USED ON

WAS 78-9833

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TE PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TE INCORPORATED, HARRISBURG, PA.

NOTE

1. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
2. OBSOLETE

PRELIMINARY ISSUE NOT RELEASED FOR PRODUKTION
NAME: HH DATE: 18.6.79

LOC A1
DIST

DRAWING VALID FROM
ZEICHNUNG GÜLTIG AB .....

P	F	LTR	REVISION RECORD	APP	DATE
		H2	ECR-10-025774	HMR	13JUN11
		H1	ECO-10-000445	AEG	12JAN10

P	F	LTR	REVISION RECORD	APP	DATE
		H	REV. PER ECR ECN 8809		15.2.83
		G	PIN NO. 8-927949-3 WAS 1-826603-3 PIN NO 8-927949-4 WAS 1-826603-4	RENAUD	12.9.82
		F	REV. PER ECN 8797		26.9.80
		E	REV. PER ECN 8539		2.4.80
		D	REV. PER ECN 8137		26.9.80
		C	REV. PER ECN 3641		11.12.78
		B	REV. PER ECN 3153		20.10.78
		A	REV. PER ECN 3070		6.10.78

DWG SIZE	PART NO	DESCRIPTION	ITEM NO
	REVISION OF EACH ASSY NO WITH WHICH ANY USED DWG REVISION		
	QTY REQ PER ASSY	PARTS LIST	

DIMENSIONS IN INCHES.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
2 PL DEC ±
3 PL DEC ±.006 (±0.15)
4 PL DEC ±
ANGLES ±
SURF TEXTURE: √
REMOVE BURRS, BREAK SHARP EDGES .015R MAX

MATERIAL | HEAT TREAT | FINISH

DR 9.1.79 HH
CHK 13.2.79 Gmy
APP
REL

TE Connectivity

NAME AMP MODU II PIN HEADER

SIZE C | DWG NO 826634 | SHEET | REV H2

PRELIMINARY

Downloaded from Elcodis.com electronic components distributor