
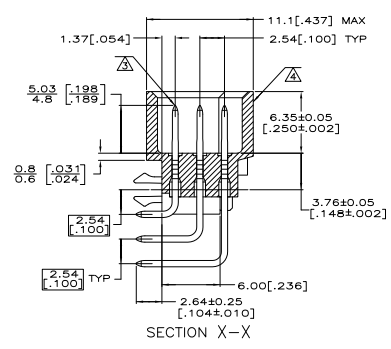
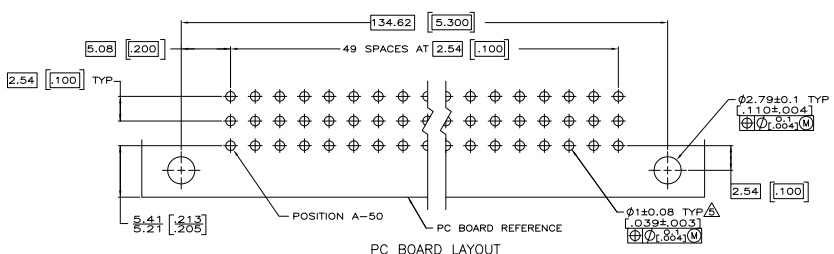
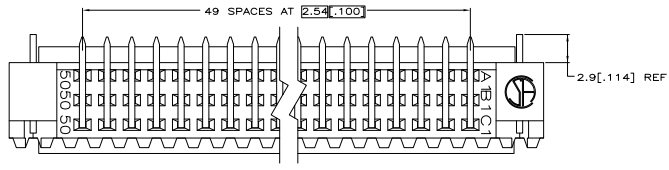
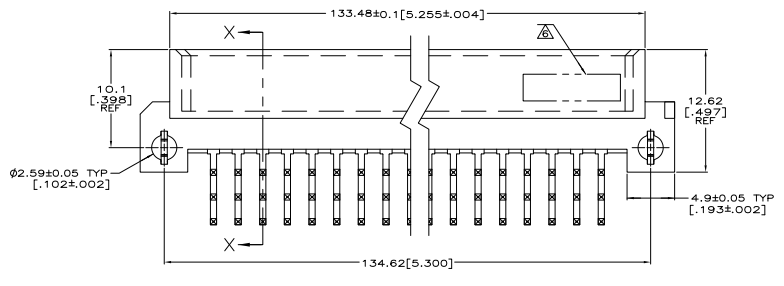


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED
 © 2005 BY TDS ELECTRONICS CORPORATION

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
01		REV PER E20-07-001907			COMAR2007 BC AS

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

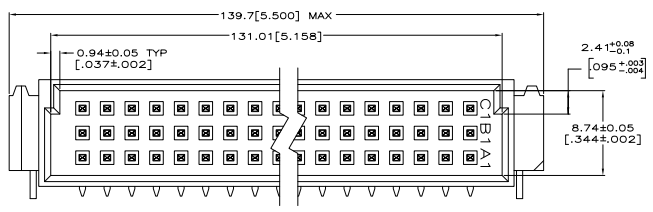

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
1-50	X X X	150					
POSITIONS LOADED	C B I A	NO. OF LOADED POSITIONS					
ASSEMBLY, PIN, EUROCARD, TYPE C, 150 POSITION, 2.64 [104] SOLDER POST, WITH BOARD LOCKS		DATE	00779	Q=5650915			
CUSTOMER DRAWING		DATE	5-1	REV	1	1	01