



THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

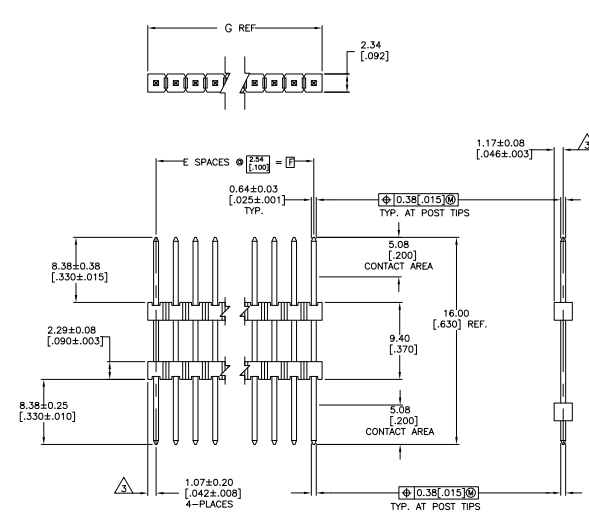

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 ▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
 ▲ FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [0.000050] NICKEL ENTIRE POST.

REV	DATE	BY	CHK	DESCRIPTION	DATE	BY	CHK
AD	00			REVISED PER EDD-11-004820	11MAR11	RK	HMR

REV	DATE	BY	CHK	DESCRIPTION	DATE	BY	CHK
101.19	99.06	39	40	4-146470-0			
3.984	3.900						
98.65	96.52	38	39	3-146470-9			
3.884	3.800						
96.11	93.98	37	38	3-146470-8			
3.784	3.700						
93.57	91.44	36	37	3-146470-7			
3.684	3.600						
91.03	88.90	35	36	3-146470-6			
3.584	3.500						
88.49	86.36	34	35	3-146470-5			
3.484	3.400						
85.95	83.82	33	34	3-146470-4			
3.384	3.300						
83.41	81.28	32	33	3-146470-3			
3.284	3.200						
80.87	78.74	31	32	3-146470-2			
3.184	3.100						
78.33	76.20	30	31	3-146470-1			
3.084	3.000						
75.79	73.66	29	30	3-146470-0			
2.984	2.900						
73.25	71.12	28	29	2-146470-9			
2.884	2.800						
70.71	68.58	27	28	2-146470-8			
2.784	2.700						
68.17	66.04	26	27	2-146470-7			
2.684	2.600						
65.63	63.50	25	26	2-146470-6			
2.584	2.500						
63.09	60.96	24	25	2-146470-5			
2.484	2.400						
60.55	58.42	23	24	2-146470-4			
2.384	2.300						
58.01	55.88	22	23	2-146470-3			
2.284	2.200						
55.47	53.34	21	22	2-146470-2			
2.184	2.100						
52.93	50.80	20	21	2-146470-1			
2.084	2.000						
50.39	48.26	19	20	2-146470-0			
1.984	1.900						
47.85	45.72	18	19	1-146470-9			
1.884	1.800						
45.31	43.18	17	18	1-146470-8			
1.784	1.700						
42.77	40.64	16	17	1-146470-7			
1.684	1.600						
40.23	38.10	15	16	1-146470-6			
1.584	1.500						
37.69	35.56	14	15	1-146470-5			
1.484	1.400						
35.15	33.02	13	14	1-146470-4			
1.384	1.300						
32.61	30.48	12	13	1-146470-3			
1.284	1.200						
30.07	27.94	11	12	1-146470-2			
1.184	1.100						
27.53	25.40	10	11	1-146470-1			
1.084	1.000						
24.99	22.86	9	10	1-146470-0			
0.984	0.900						
22.45	20.32	8	9	146470-9			
0.884	0.800						
19.91	17.78	7	8	146470-8			
0.784	0.700						
17.37	15.24	6	7	146470-7			
0.684	0.600						
14.83	12.70	5	6	146470-6			
0.584	0.500						
12.29	10.16	4	5	146470-5			
0.484	0.400						
9.75	7.62	3	4	146470-4			
0.384	0.300						
7.21	5.08	2	3	146470-3			
0.284	0.200						
4.67	2.54	1	2	146470-2			
0.184	0.100						
2.13	-	-	1	146470-1			
0.084	-	-					
G	F	E	NO. OF POSITIONS	PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. IT IS TO BE KEPT IN CONFIDENCE AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

TE Connectivity
 HEADERS ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ POST, UNSHROUDED

SIZE: A1 00779 G=146470
 CUSTOMER DRAWING