



THIS DRAWING IS UNAPPROVED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER EDD-11-04820	1MMR11	RK	HMR

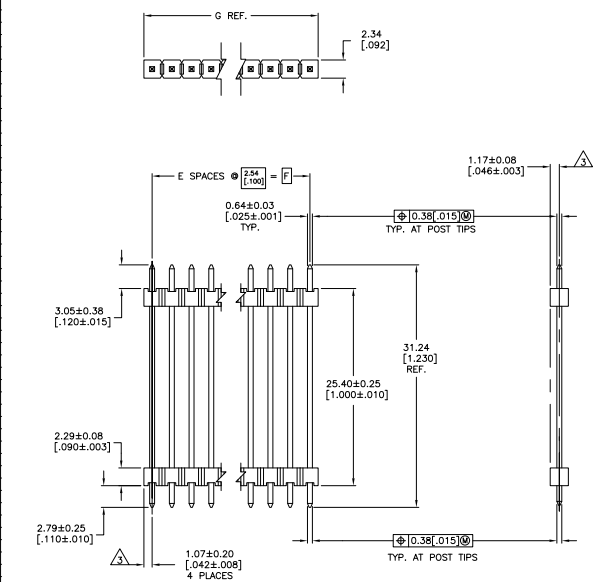

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING  
 ▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.  
 ▲ FINISH: 0.00254-0.00508 [0.00100-0.00200] BRIGHT TIN-LEAD OVER 0.00127 [0.00050] NICKEL ENTIRE POST.  
 ▲ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN OVER 0.00127 [0.00050] NICKEL ENTIRE POST.

NO.	DESCRIPTION	QTY.	UNIT	REV.	DATE	BY	CHK.	APP.
39	9-146474-0	39						
38	8-146474-9	38						
37	8-146474-8	37						
36	8-146474-7	36						
35	8-146474-6	35						
34	8-146474-5	34						
33	8-146474-4	33						
32	8-146474-3	32						
31	8-146474-2	31						
30	8-146474-1	30						
29	8-146474-0	29						
28	7-146474-9	28						
27	7-146474-8	27						
26	7-146474-7	26						
25	7-146474-6	25						
24	7-146474-5	24						
23	7-146474-4	23						
22	7-146474-3	22						
21	7-146474-2	21						
20	7-146474-1	20						
19	7-146474-0	19						
18	6-146474-9	18						
17	6-146474-8	17						
16	6-146474-7	16						
15	6-146474-6	15						
14	6-146474-5	14						
13	6-146474-4	13						
12	6-146474-3	12						
11	6-146474-2	11						
10	6-146474-1	10						
9	6-146474-0	9						
8	5-146474-9	8						
7	5-146474-8	7						
6	5-146474-7	6						
5	5-146474-6	5						
4	5-146474-5	4						
3	5-146474-4	3						
2	5-146474-3	2						
1	5-146474-2	1						
	5-146474-1							

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE Connectivity. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS: INCHES  
 TOLERANCES: UNLESS OTHERWISE SPECIFIED  
 FINISH: UNLESS OTHERWISE SPECIFIED  
 SURFACE: UNLESS OTHERWISE SPECIFIED  
 REF. TABLE: UNLESS OTHERWISE SPECIFIED

DATE: 01/00/79  
 DRAWING NO: G=146474  
 CUSTOMER DRAWING  
 SHEET: 4.1 OF 1