


THIS DRAWING IS UNAPPROVED UNLESS SIGNED BY THE DESIGNER
ALC RIGHT RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	3/9	REVISED PER ECD-11-004820	11MM11	RK	HMR

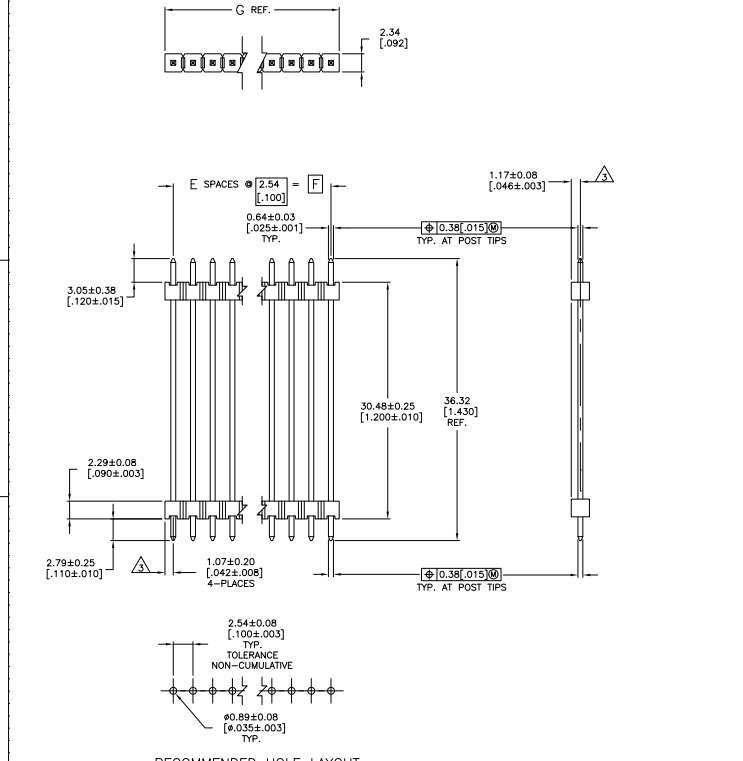

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
▲ FINISH: 0.00254-0.00508 [0.00100-0.00200] BRIGHT TIN-LEAD OVER 0.00127 [0.00050] NICKEL ENTIRE POST.
▲ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN OVER 0.00127 [0.00050] NICKEL ENTIRE POST.

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
▲	101.19	99.06	39	40	9-146480-0
▲	98.65	96.52	38	39	8-146480-9
▲	96.11	93.98	37	38	8-146480-8
▲	93.57	91.44	36	37	8-146480-7
▲	91.03	88.90	35	36	8-146480-6
▲	88.49	86.36	34	35	8-146480-5
▲	85.95	83.82	33	34	8-146480-4
▲	83.41	81.28	32	33	8-146480-3
▲	80.87	78.74	31	32	8-146480-2
▲	78.33	76.20	30	31	8-146480-1
▲	75.79	73.66	29	30	8-146480-0
▲	73.25	71.12	28	29	7-146480-9
▲	70.71	68.58	27	28	7-146480-8
▲	68.17	66.04	26	27	7-146480-7
▲	65.63	63.50	25	26	7-146480-6
▲	63.09	60.96	24	25	7-146480-5
▲	60.55	58.42	23	24	7-146480-4
▲	58.01	55.88	22	23	7-146480-3
▲	55.47	53.34	21	22	7-146480-2
▲	52.93	50.80	20	21	7-146480-1
▲	50.39	48.26	19	20	7-146480-0
▲	47.85	45.72	18	19	6-146480-9
▲	45.31	43.18	17	18	6-146480-8
▲	42.77	40.64	16	17	6-146480-7
▲	40.23	38.10	15	16	6-146480-6
▲	37.69	35.56	14	15	6-146480-5
▲	35.15	33.02	13	14	6-146480-4
▲	32.61	30.48	12	13	6-146480-3
▲	30.07	27.94	11	12	6-146480-2
▲	27.53	25.40	10	11	6-146480-1
▲	24.99	22.86	9	10	6-146480-0
▲	22.45	20.32	8	9	5-146480-9
▲	19.91	17.78	7	8	5-146480-8
▲	17.37	15.24	6	7	5-146480-7
▲	14.83	12.70	5	6	5-146480-6
▲	12.29	10.16	4	5	5-146480-5
▲	9.75	7.62	3	4	5-146480-4
▲	7.21	5.08	2	3	5-146480-3
▲	4.67	2.54	1	2	5-146480-2
▲	2.13	-	-	1	5-146480-1

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
▲	101.19	99.06	39	40	4-146480-0
▲	98.65	96.52	38	39	3-146480-9
▲	96.11	93.98	37	38	3-146480-8
▲	93.57	91.44	36	37	3-146480-7
▲	91.03	88.90	35	36	3-146480-6
▲	88.49	86.36	34	35	3-146480-5
▲	85.95	83.82	33	34	3-146480-4
▲	83.41	81.28	32	33	3-146480-3
▲	80.87	78.74	31	32	3-146480-2
▲	78.33	76.20	30	31	3-146480-1
▲	75.79	73.66	29	30	3-146480-0
▲	73.25	71.12	28	29	2-146480-9
▲	70.71	68.58	27	28	2-146480-8
▲	68.17	66.04	26	27	2-146480-7
▲	65.63	63.50	25	26	2-146480-6
▲	63.09	60.96	24	25	2-146480-5
▲	60.55	58.42	23	24	2-146480-4
▲	58.01	55.88	22	23	2-146480-3
▲	55.47	53.34	21	22	2-146480-2
▲	52.93	50.80	20	21	2-146480-1
▲	50.39	48.26	19	20	2-146480-0
▲	47.85	45.72	18	19	1-146480-9
▲	45.31	43.18	17	18	1-146480-8
▲	42.77	40.64	16	17	1-146480-7
▲	40.23	38.10	15	16	1-146480-6
▲	37.69	35.56	14	15	1-146480-5
▲	35.15	33.02	13	14	1-146480-4
▲	32.61	30.48	12	13	1-146480-3
▲	30.07	27.94	11	12	1-146480-2
▲	27.53	25.40	10	11	1-146480-1
▲	24.99	22.86	9	10	1-146480-0
▲	22.45	20.32	8	9	146480-9
▲	19.91	17.78	7	8	146480-8
▲	17.37	15.24	6	7	146480-7
▲	14.83	12.70	5	6	146480-6
▲	12.29	10.16	4	5	146480-5
▲	9.75	7.62	3	4	146480-4
▲	7.21	5.08	2	3	146480-3
▲	4.67	2.54	1	2	146480-2
▲	2.13	-	-	1	146480-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.

TE Connectivity
TE CONNECTIVITY
TE CONNECTIVITY

HEADER ASSEMBLY, MOD B, STACKING, SINGLE ROW, 0.25 SQ. POST, UNDRILLED

DATE: 00779 G=146480

CUSTOMER DRAWING