DO NOT SCALE | DIMENSIONS IN mm | METRIC | THIRD ANGLE PROJECTION

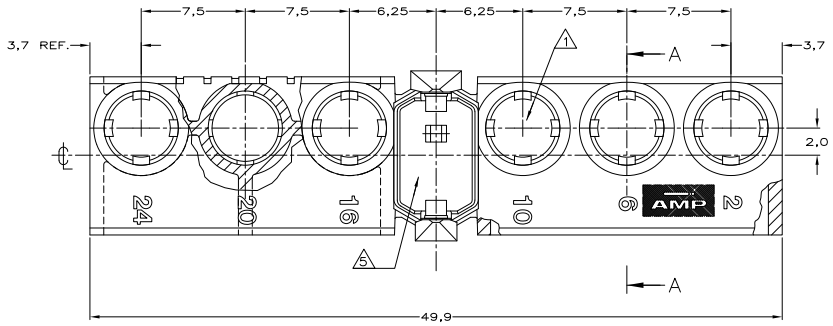

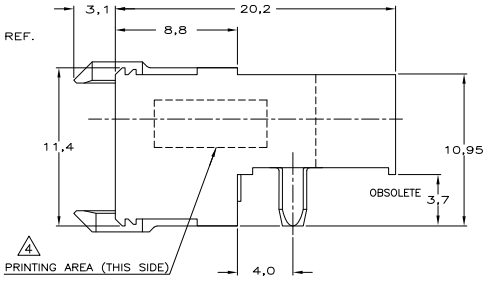

OBSOLETE

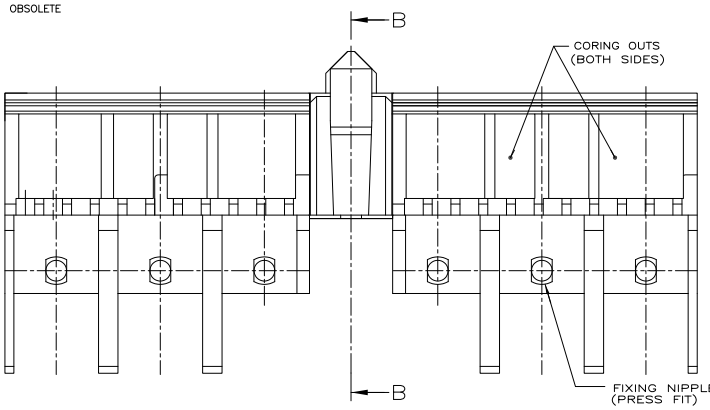

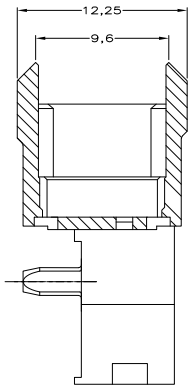

SECTION B–B

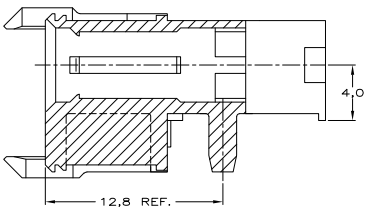

SECTION A–A

NOTES:

1. CONTACT CAVITIES SUITABLE FOR 4,8 DIA. HIGH CURRENT, HIGH FREQUENCY OR FIBRE OPTIC CONTACTS AS PER DIN 41626 (SEE ALSO NOTE 6).
2. MATERIAL HOUSING : GREY GLASSFILLED POLYESTER (PBT).
3. MATERIAL HOUSING : GREY GLASSFILLED POLYMER (PCT).
4. CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
5. AREA RESERVED FOR KEYING PART, BASIC P/N 100526.
6. NOT PLATED–THROUGH HOLES (6x).
7. 1,3 DIA. PLATED–THROUGH HOLES (30x) CAN BE OMITTED IF SPECIAL CONTACTS WITH CABLE CONNECTION OR FIBRE OPTIC CONTACTS ARE USED.
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

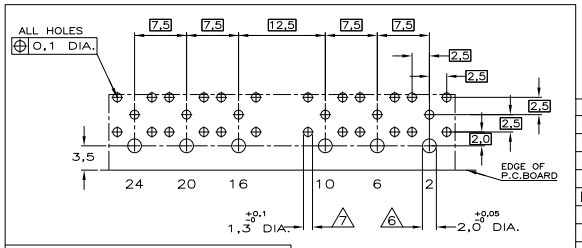

RECOMMENDED PCB–HOLE LAY–OUT
COMPONENT SIDE

PRELIMINARY

8	OBSOLETE	–		3		~~100746–3~~
		–		2		100746–1
		FINISH		MATERIAL		PARTNUMBER
–	–	-	-	-	CUSTOMER DRAWING	FOR REFERENCE ONLY WILL NOT BE UPDATED
–	–	-	-	-	© COPYRIGHT 19 93 BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED.AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	
–	–	-	-	-	THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION ,19	
–	–	-	-	-		

LTR.	REVISION RECORD	DR.	CHK.	DATE
B1	ECO–09–021826	KK	AEG	06JAN10
B	EH–0720–95	E.D.	B.M.	29–06–95
A	H–9585	B.M.	B.M.	01–10–93

AMP HOLLAND B.V. 's–Hertogenbosch, The Netherlands.

NAME: Z–PACK 2mm HM TYPE L FEMALE CONNECTOR HOUSING

DR.: S.MEEUWSEN	CHK.: B.MOOIJ	APP.: L.V.SOEST	DWG.No. C–100746	REV.LTR. B1	SHEET 1 OF 1	A2
DATE: 12 MAR 92	DATE: 23 MAR 1992	DATE: 13 APR 1992				

R6–129 (REV.04–91)

Downloaded from Elcodis.com electronic components distributor