

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LN	DESCRIPTION	DATE	BY	APPD
AD	00				
	P2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

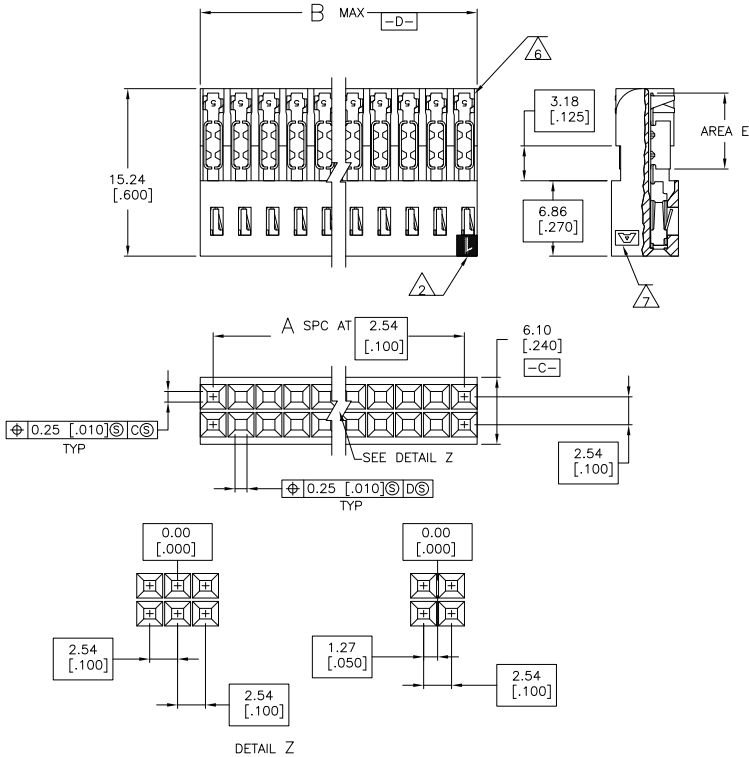

REV	DESCRIPTION	DATE	BY	APPD	
9	OBsolete	68.58 [2.700]	26	54	5-102694-9
		25.40 [1.000]	9	20	5-102694-8
		22.86 [ .900]	8	18	5-102694-7
		20.32 [ .800]	7	16	5-102694-6
		17.78 [ .700]	6	14	5-102694-5
		15.24 [ .600]	5	12	5-102694-4
		10.16 [ .400]	3	8	5-102694-2
		7.62 [ .300]	2	6	5-102694-1
		12.70 [ .500]	4	10	1-102694-0
9	OBsolete	68.58 [2.700]	26	54	102694-9
		25.40 [1.000]	9	20	102694-8
		22.86 [ .900]	8	18	102694-7
9	SUP BY 5-102694-6	20.32 [ .800]	7	16	102694-6
		17.78 [ .700]	6	14	102694-5
		15.24 [ .600]	5	12	102694-4
		12.70 [ .500]	4	10	102694-3
		10.16 [ .400]	3	8	102694-2
		7.62 [ .300]	2	6	102694-1
	FINISH	B	A	NO. OF POSN	PART NO.

- 1 HOUSING: PBT, UL 94V-0 RATED, COLOR-BLACK  
CONTACTS: COPPER ALLOY PER ASTM B103
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254[.000050-.000100] TIN-LEAD IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 4 0.00076 [ .000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [ .000050-.000100] TIN IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL
- 5 USE WITH #26-#22 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "5" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 ROHS 2002 /95/EC COMPLIANT

9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRN S. SHUEY 12-30-91	TE Connectivity
CHK M. RIDER 1-6-92	
APPD M. RIDER 1-6-92	
PRODUCT SPEC: 108-25018	AMPMODU MT, RCPT ASSY, HIGH PRESSURE CONTACTS FOR 22-26 AWG WIRE SIZE
APPLICATION SPEC: 114-25032	SIZE ONE CODE DRAWING NO. RESTRICTED TO
WEIGHT: -	A2 00779 C=102694
MATERIAL FINISH: SEE TABLE	CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 of 1 REV: P2