

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
R2		REVISED PER ECO-11-004820	11MAR11	RK	HMR

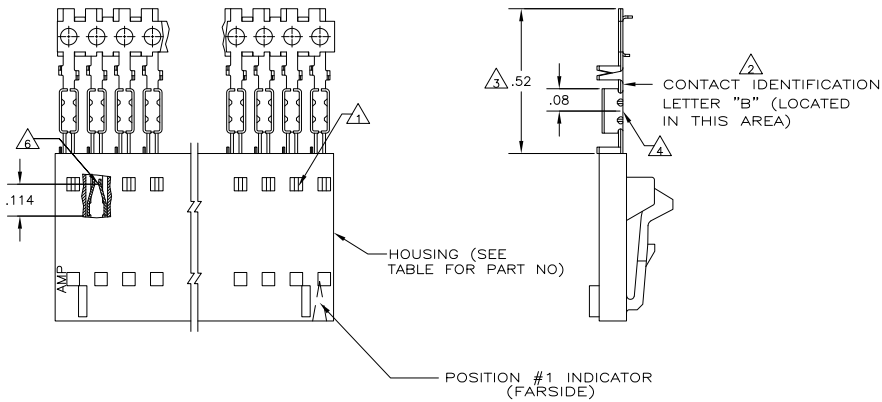

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103957
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 FINISH: CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISL

△ OBSOLETE	△	2-104257-4	25	7-103644-4
△ OBSOLETE	△	2-104257-3	24	7-103644-3
△ OBSOLETE	△	2-104257-2	23	7-103644-2
△ OBSOLETE	△	2-104257-1	22	7-103644-1
	△	2-104257-0	21	7-103644-0
	△	1-104257-9	20	6-103644-9
△ OBSOLETE	△	1-104257-8	19	6-103644-8
△ OBSOLETE	△	1-104257-7	18	6-103644-7
△ OBSOLETE	△	1-104257-6	17	6-103644-6
△ OBSOLETE	△	1-104257-5	16	6-103644-5
△ OBSOLETE	△	1-104257-4	15	6-103644-4
	△	1-104257-3	14	6-103644-3
	△	1-104257-2	13	6-103644-2
	△	2-104257-4	25	2-103644-4
△ OBSOLETE	△	2-104257-3	24	2-103644-3
△ OBSOLETE	△	2-104257-2	23	2-103644-2
△ OBSOLETE	△	2-104257-1	22	2-103644-1
△ SUPERSEDED BY 7-103644-0	△	2-104257-0	21	2-103644-0
	△	1-104257-9	20	1-103644-9
△ OBSOLETE	△	1-104257-8	19	1-103644-8
	△	1-104257-7	18	1-103644-7
	△	1-104257-6	17	1-103644-6
	△	1-104257-5	16	1-103644-5
	△	1-104257-4	15	1-103644-4
	△	1-104257-3	14	1-103644-3
	△	1-104257-2	13	1-103644-2
	△	1-104257-1	12	1-103644-1
SUPERSEDED BY 1-103957-1	△	1-104257-0	11	1-103644-0
SUPERSEDED BY 1-103957-0	△	1-104257-0	10	103644-9
SUPERSEDED BY 103957-9	△	104257-9	9	103644-8
SUPERSEDED BY 103957-8	△	104257-8	8	103644-7
SUPERSEDED BY 103957-7	△	104257-7	7	103644-6
SUPERSEDED BY 103957-6	△	104257-6	6	103644-5
SUPERSEDED BY 103957-5	△	104257-5	5	103644-4
SUPERSEDED BY 103957-4	△	104257-4	4	103644-3
SUPERSEDED BY 103957-3	△	104257-3	3	103644-2
SUPERSEDED BY 103957-2	△	104257-2	2	103644-1
SUPERSEDED BY 103957-1	△	104257-1	1	103644-0

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
---------	---------------------	------------	----------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: L. A. MAYER	DATE: 11-4-06		TE Connectivity
OK: de Jong	DATE: 11-12-06		
DRAWN BY: P. de Jong	DATE: -	RCPT ASSY, AMPMODU MTE, SINGLE ROW, 100 C/L	
PRODUCT SPEC: 108-25034	DATE: -	LATCHED AND POLARIZED,	
APPLICATION SPEC: 114-25026	DATE: -	FOR NO 22- NO 26 AWG WIRE SIZE	
SIZE: ONE CODE (DRAWING NO)	DATE: -	RESTRICTED TO: A2 00779 C=103644	
HEIGHT: -	DATE: -	SCALE: 4:1	SHEET: 1 of 1
MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC, COLOR: BLACK	FINISH: SEE TABLE	CUSTOMER DRAWING	REV: R2