

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		P	EC	063C 0766 04	27DEC04	BSV	JLG
		P1		REVISED PER ECO-09-020932	26AUG09	KK	AEG

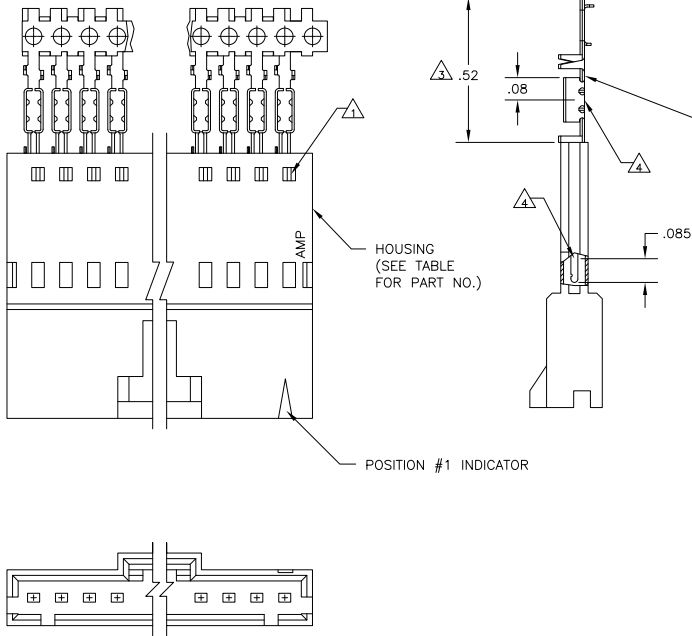

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

△	2-103653-4	25	7-103660-4
△	2-103653-3	24	7-103660-3
△	2-103653-2	23	7-103660-2
△	2-103653-1	22	7-103660-1
△	2-103653-0	21	7-103660-0
△	1-103653-9	20	6-103660-9
△	1-103653-8	19	6-103660-8
△	1-103653-7	18	6-103660-7
△	1-103653-6	17	6-103660-6
△	1-103653-5	16	6-103660-5
△	1-103653-4	15	6-103660-4
△	1-103653-3	14	6-103660-3
△	1-103653-2	13	6-103660-2
△	2-103653-4	25	2-103660-4
△	2-103653-3	24	2-103660-3
△	2-103653-2	23	2-103660-2
△	2-103653-1	22	2-103660-1
△	2-103653-0	21	2-103660-0
△	1-103653-9	20	1-103660-9
△	1-103653-8	19	1-103660-8
△	1-103653-7	18	1-103660-7
△	1-103653-6	17	1-103660-6
△	1-103653-5	16	1-103660-5
△	1-103653-4	15	1-103660-4
△	1-103653-3	14	1-103660-3
△	1-103653-2	13	1-103660-2
△	1-103653-1	12	1-103660-1
△	1-103653-0	11	1-103660-0
△	103653-9	10	103660-9
△	103653-8	9	103660-8
△	103653-7	8	103660-7
△	103653-6	7	103660-6
△	103653-5	6	103660-5
△	103653-4	5	103660-4
△	103653-3	4	103660-3
△	103653-2	3	103660-2
△	103653-1	2	103660-1

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △ USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103945
- △ MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- △ FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △ FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 1-103945-1
 SUPERSEDED BY 1-103945-0
 SUPERSEDED BY 103945-9
 SUPERSEDED BY 103945-8
 SUPERSEDED BY 103945-7
 SUPERSEDED BY 103945-6
 SUPERSEDED BY 103945-5
 SUPERSEDED BY 103945-4
 SUPERSEDED BY 103945-3
 SUPERSEDED BY 103945-2
 SUPERSEDED BY 103945-1

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
---------	---------------------	------------	----------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: R. BROWN	DATE: 26AUG00	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
CHECKED BY: K. WRIGHT	DATE: 26AUG00	
DRAWN BY: K. WRIGHT	DATE: 26AUG00	SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, WITH LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE
PRODUCT SPEC: 108-25034	APPLICATION SPEC: 114-25026	
MATERIAL: SEE TABLE	FINISH: SEE TABLE	RESTRICTED TO: A2 00779 C=103660

CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV P1