

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAR, 2006. ALL RIGHTS RESERVED.
 COPYRIGHT 2009 By -

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
B		RELEASED AS PER ECR-09-017658	06AUG09	SRE	PCH	
B1		ECR-10-026537	21JAN11	KK	HMR	

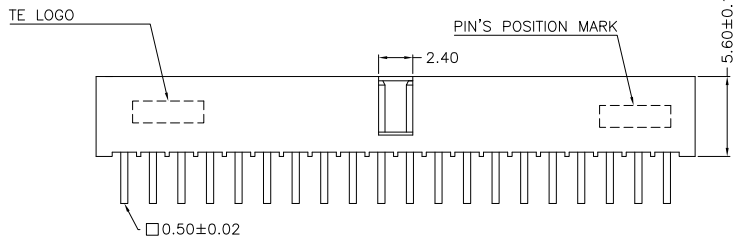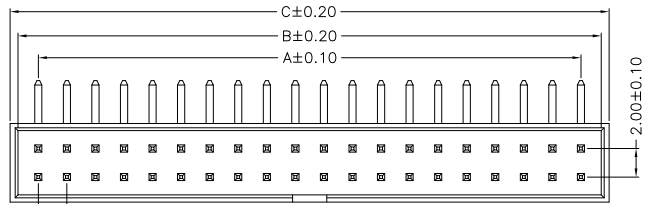

- NOTE:
- MATERIAL : HOUSING : NYLON 6T, UL94V-0, BLACK COLOUR. CONTACT : BRASS, THICKNESS=0.5mm
 - FINISH: CONTACT: 10µ" MIN. GOLD PLATED ON CONTACT AREA, 100µ" MIN. MATTE TIN PLATED ON SOLDERTAILS, 50µ" MIN. NICKEL UNDERPLATED OVERALL
 - 3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B
 - 4. QUALIFICATION TEST REPORT: 501-57197

POS.	A	B	C	PART NUMBER	
OBSOLETE	64	62.00	64.85	65.95	6-1734493-4
OBSOLETE	62	60.00	62.85	63.95	6-1734493-2
OBSOLETE	60	58.00	60.85	61.95	6-1734493-0
OBSOLETE	58	56.00	58.85	59.95	5-1734493-8
OBSOLETE	56	54.00	56.85	57.95	5-1734493-6
OBSOLETE	54	52.00	54.85	55.95	5-1734493-4
OBSOLETE	52	50.00	52.85	53.95	5-1734493-2
OBSOLETE	50	48.00	50.85	51.95	5-1734493-0
OBSOLETE	48	46.00	48.85	49.95	4-1734493-8
OBSOLETE	46	44.00	46.85	47.95	4-1734493-6
OBSOLETE	44	42.00	44.85	45.95	4-1734493-4
OBSOLETE	42	40.00	42.85	43.95	4-1734493-2
OBSOLETE	40	38.00	40.85	41.95	4-1734493-0
OBSOLETE	38	36.00	38.85	39.95	3-1734493-8
OBSOLETE	36	34.00	36.85	37.95	3-1734493-6
OBSOLETE	34	32.00	34.85	35.95	3-1734493-4
OBSOLETE	32	30.00	32.85	33.95	3-1734493-2
OBSOLETE	30	28.00	30.85	31.95	3-1734493-0
OBSOLETE	28	26.00	28.85	29.95	2-1734493-8
OBSOLETE	26	24.00	26.85	27.95	2-1734493-6
OBSOLETE	24	22.00	24.85	25.95	2-1734493-4
OBSOLETE	22	20.00	22.85	23.95	2-1734493-2
OBSOLETE	20	18.00	20.85	21.95	2-1734493-0
OBSOLETE	18	16.00	18.85	19.95	1-1734493-8
OBSOLETE	16	14.00	16.85	17.95	1-1734493-6
OBSOLETE	14	12.00	14.85	15.95	1-1734493-4
OBSOLETE	12	10.00	12.85	13.95	1-1734493-2
OBSOLETE	10	8.00	10.85	11.95	1-1734493-0
OBSOLETE	8	6.00	8.85	9.95	0-1734493-8
OBSOLETE	6	4.00	6.85	7.95	0-1734493-6
OBSOLETE	4	2.00	4.85	5.95	0-1734493-4

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
 (TOP VIEW) (TOLERANCE: ±0.05)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O.HU 28-MAR-2006	TE Connectivity AMPMODU 2.0mm PITCH, RIGHT ANGLE,DUAL ROW, THRU-HOLE	
DIMENSIONS:		CHK S.HOU 28-MAR-2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W.J.KE 28-MAR-2006	NAME	
mm		PRODUCT SPEC	108-57197	
0 PLC ± -		APPLICATION SPEC	-	
1 PLC ± 0.20		WEIGHT	-	
2 PLC ± 0.15		SIZE	A3	
3 PLC ± 0.10		CAGE CODE	-	
4 PLC ± -		DRAWING NO	C-1734493	
ANGLES ± -		RESTRICTED TO	-	
MATERIAL		CUSTOMER DRAWING	SCALE	1:1
FINISH		SHEET	1 of 2	
1		REV	B1	

4


3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAR. 2006. ALL RIGHTS RESERVED. COPYRIGHT 2009 By -

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	SEE SHEET 1				




BOX HEADER




TEN PACKAGES OF ONE BUNCH

CORK



TUBE
635mm(L)X12mm(W)X11mm(H)
A / TUBE

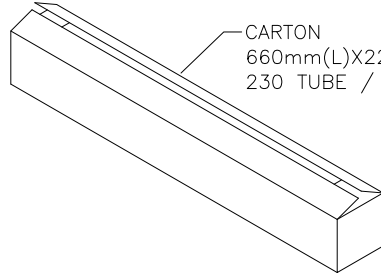

CARTON
660mm(L)X220mm(W)X140mm(H)
230 TUBE / CARTON

REV	DATE	BY	CHKD	DESCRIPTION
2,070	9	64		6-1734493-4
2,070	9	62		6-1734493-2
2,070	9	60		6-1734493-0
2,300	10	58		5-1734493-8
2,300	10	56		5-1734493-6
2,300	10	54		5-1734493-4
2,530	11	52		5-1734493-2
2,530	11	50		5-1734493-0
2,760	12	48		4-1734493-8
2,760	12	46		4-1734493-6
2,990	13	44		4-1734493-4
2,990	13	42		4-1734493-2
3,220	14	40		4-1734493-0
3,450	15	38		3-1734493-8
3,450	15	36		3-1734493-6
3,680	16	34		3-1734493-4
3,910	17	32		3-1734493-2
4,140	18	30		3-1734493-0
4,600	20	28		2-1734493-8
4,830	21	26		2-1734493-6
5,290	23	24		2-1734493-4
5,750	25	22		2-1734493-2
6,210	27	20		2-1734493-0
6,900	30	18		1-1734493-8
7,590	33	16		1-1734493-6
8,510	37	14		1-1734493-4
9,660	42	12		1-1734493-2
11,500	50	10		1-1734493-0
13,800	60	8		0-1734493-8
17,250	75	6		0-1734493-6
23,000	100	4		0-1734493-4
PCS/ CARTON	PCS/ TUBE	POS.		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± 0.20
2 PLC	± 0.15
3 PLC	± 0.10
4 PLC	± -
ANGLES	± -

MATERIAL	FINISH
SEE SHEET 1	SEE SHEET 1

DWN	O.HU	28-MAR-2006
CHK	S.HOU	28-MAR-2006
APVD	W.J.KE	28-MAR-2006
PRODUCT SPEC	108-57197	
APPLICATION SPEC	-	
WEIGHT	-	
CUSTOMER DRAWING		

STE TE Connectivity			
NAME			
AMPMODU 2.0mm PITCH, RIGHT ANGLE,DUAL ROW, THRU-HOLE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-1734493	-
SCALE 1:1			SHEET 2 of 2
REV B1			