

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © copyright - By - ALL RIGHTS RESERVED.

LOC		REV		REVISIONS			
AD	00	F	LWR	DESCRIPTION	DATE	BY	APD
		AB3		REVISED PER ECO-11-004587	11MAR11	RK	HMR

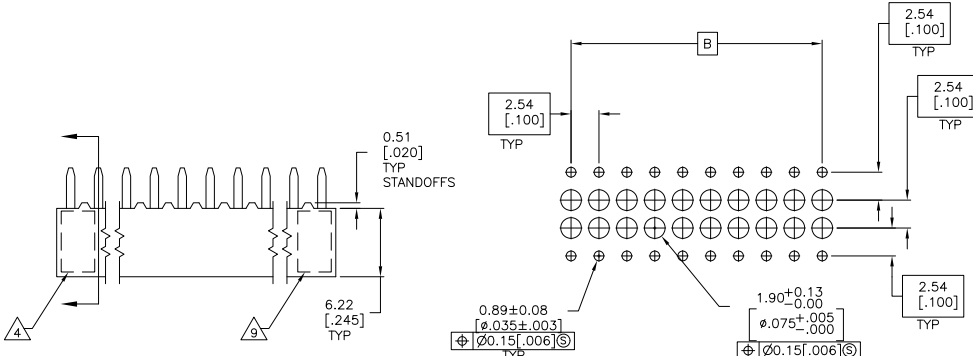

RECOMMENDED PC BOARD HOLE PATTERN  
 PC BOARD THICKNESS 1.57[.062]

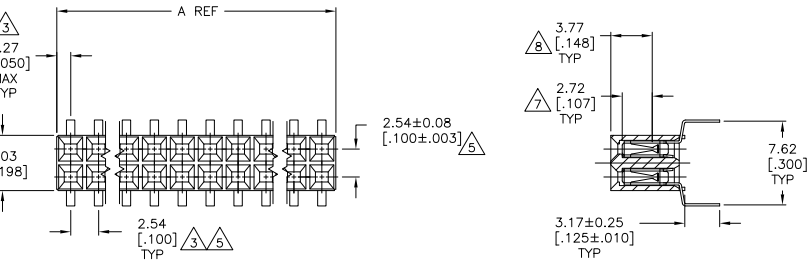

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	△	96.52[3.800]	99.06[3.900]	78	-4	534267-0
△ OBSOLETE	△	91.44[3.600]	93.98[3.700]	74	-3	534267-8
△ OBSOLETE	△	88.90[3.500]	91.44[3.600]	72	-3	534267-7
△ OBSOLETE	△	86.36[3.400]	88.90[3.500]	70	-3	534267-6
△ OBSOLETE	△	83.82[3.300]	86.36[3.400]	68	-3	534267-5
△ OBSOLETE	△	81.28[3.200]	83.82[3.300]	66	-3	534267-4
△ OBSOLETE	△	78.74[3.100]	81.28[3.200]	64	-3	534267-3
△ OBSOLETE	△	76.20[3.000]	78.74[3.100]	62	-3	534267-2
△ OBSOLETE	△	71.12[2.800]	73.66[2.900]	58	-3	534267-1
△ OBSOLETE	△	68.58[2.700]	71.12[2.800]	56	-3	534267-0
△ OBSOLETE	△	66.04[2.600]	68.58[2.700]	54	-3	534267-9
△ OBSOLETE	△	63.50[2.500]	66.04[2.600]	52	-2	534267-8
△ OBSOLETE	△	55.88[2.200]	58.42[2.300]	46	-2	534267-7
△ OBSOLETE	△	53.34[2.100]	55.88[2.200]	44	-2	534267-6
△ OBSOLETE	△	50.80[2.000]	53.34[2.100]	42	-2	534267-5
△ OBSOLETE	△	45.72[1.800]	48.26[1.900]	38	-2	534267-4
△ OBSOLETE	△	40.64[1.600]	43.18[1.700]	34	-2	534267-3
△ OBSOLETE	△	38.10[1.500]	40.64[1.600]	32	-2	534267-2
△ OBSOLETE	△	33.02[1.300]	35.56[1.400]	28	-2	534267-1
△ OBSOLETE	△	25.40[1.000]	27.94[1.100]	22	-2	534267-0
△ OBSOLETE	△	12.70[.500]	15.24[.600]	12	-2	534267-9
△ OBSOLETE	△	17.78[.700]	20.32[.800]	16	-1	534267-8
△ OBSOLETE	△	60.96[2.400]	63.50[2.500]	50	-1	534267-7
△ OBSOLETE	△	2.54[.100]	5.08[.200]	4	-1	534267-6
△ OBSOLETE	△	4.31[.170]	8.62[.340]	36	-1	534267-5
△ OBSOLETE	△	5.08[.200]	7.62[.300]	6	-1	534267-4
△ OBSOLETE	△	35.56[1.400]	38.10[1.500]	30	-1	534267-3
△ OBSOLETE	△	58.42[2.300]	60.96[2.400]	48	-1	534267-1
△ OBSOLETE	△	20.32[.800]	22.86[.900]	18	-1	534267-0
△ OBSOLETE	△	27.94[1.100]	30.48[1.200]	24	-1	534267-9
△ OBSOLETE	△	73.66[2.900]	76.20[3.000]	60	-1	534267-8
△ OBSOLETE	△	48.26[1.900]	50.80[2.000]	40	-1	534267-7
△ OBSOLETE	△	30.48[1.200]	33.02[1.300]	26	-1	534267-6
△ OBSOLETE	△	7.62[.300]	10.16[.400]	8	-1	534267-5
△ OBSOLETE	△	99.06[3.900]	101.60[4.000]	80	-1	534267-4
△ OBSOLETE	△	10.16[.400]	12.70[.500]	10	-1	534267-3
△ OBSOLETE	△	22.86[.900]	25.40[1.000]	20	-1	534267-2
△ OBSOLETE	△	15.24[.600]	17.78[.700]	14	-1	534267-1

- 1 HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK.  
CONTACT: PHOSPHOR BRONZE
- 2 CONTACT: DUPLEX PLATED 0.76µm[.000030] GOLD IN CONTACT AREA, 3.81-7.62µm[.000150-.000300] BRIGHT TIN-LEAD ON LEADS, ALL OVER 1.27µm[.000050] MINIMUM NICKEL
- 3 THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS
- 4 PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- 5 TOLERANCE IS NON-CUMULATIVE.
- 6 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF THE CONNECTIVITY LOGO.
- 7 POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- 8 POINT-OF-CONTACT DIMENSION.
- 9 TE CONNECTIVITY TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- 10 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 11 CONTACT: DUPLEX PLATED 0.76 MICROMETERS(.000030) MIN GOLD IN CONTACT AREA, 3.81-7.62 MICROMETERS(.000150-.000300) MATTE TIN ON LEADS, ALL OVER 1.27 MICROMETERS (.000050) MINIMUM NICKEL.
- 12 ROHS 2002/95/EC COMPLIANT

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: M. BILNER ORNOV0202  
 CHK: J. OLSON ORNOV02  
 DATE: 108-25022  
 APPLICATION SPEC: 114-25018  
 WEIGHT: -

**TE** TE Connectivity  
 RECEPTACLE ASSEMBLY, MOD IV,  
 DOUBLE ROW, DUAL ENTRY, .100X.100CL,  
 VERTICAL MOUNT, AMPMODU

MATERIAL: FINISH:

SIZE: A2 ONE CODE DRAWING NO: 00779 C=534267 RESTRICTED TO: -  
 CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 of 2 REF: AB3

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
-	-	SEE SHEET 1	-	-	-

OBSOLETE	△	96.52[3.800]	99.06[3.900]	78	△	9-534267-0
OBSOLETE	△	91.44[3.600]	93.98[3.700]	74	△	8-534267-9
OBSOLETE	△	88.90[3.500]	91.44[3.600]	72	△	8-534267-8
OBSOLETE	△	86.36[3.400]	88.90[3.500]	70	△	8-534267-7
OBSOLETE	△	83.82[3.300]	86.36[3.400]	68	△	8-534267-6
OBSOLETE	△	81.28[3.200]	83.82[3.300]	66	△	8-534267-5
	△	78.74[3.100]	81.28[3.200]	64	△	8-534267-4
OBSOLETE	△	76.20[3.000]	78.74[3.100]	62	△	8-534267-3
OBSOLETE	△	71.12[2.800]	73.66[2.900]	58	△	8-534267-2
OBSOLETE	△	68.58[2.700]	71.12[2.800]	56	△	8-534267-1
OBSOLETE	△	66.04[2.600]	68.58[2.700]	54	△	8-534267-0
OBSOLETE	△	63.50[2.500]	66.04[2.600]	52	△	7-534267-9
OBSOLETE	△	55.88[2.200]	58.42[2.300]	46	△	7-534267-8
OBSOLETE	△	53.34[2.100]	55.88[2.200]	44	△	7-534267-7
OBSOLETE	△	50.80[2.000]	53.34[2.100]	42	△	7-534267-6
OBSOLETE	△	45.72[1.800]	48.26[1.900]	38	△	7-534267-5
OBSOLETE	△	40.64[1.600]	43.18[1.700]	34	△	7-534267-4
OBSOLETE	△	38.10[1.500]	40.64[1.600]	32	△	7-534267-3
OBSOLETE	△	33.02[1.300]	35.56[1.400]	28	△	7-534267-2
OBSOLETE	△	25.40[1.000]	27.94[1.100]	22	△	7-534267-1
OBSOLETE	△	12.70[.500]	15.24[.600]	12	△	7-534267-0
	△	17.78[.700]	20.32[.800]	16	△	6-534267-9
	△	60.96[2.400]	63.50[2.500]	50	△	6-534267-8
OBSOLETE	△	2.54[.100]	5.08[.200]	4	△	6-534267-7
OBSOLETE	△	93.98[3.700]	96.52[3.800]	76	△	6-534267-6
	△	43.18[1.700]	45.72[1.800]	36	△	6-534267-5
	△	5.08[.200]	7.62[.300]	6	△	6-534267-4
OBSOLETE	△	-	2.54[.100]	2	△	6-534267-3
	△	35.56[1.400]	38.10[1.500]	30	△	6-534267-2
OBSOLETE	△	58.42[2.300]	60.96[2.400]	48	△	6-534267-1
OBSOLETE	△	20.32[.800]	22.86[.900]	18	△	6-534267-0
	△	27.94[1.100]	30.48[1.200]	24	△	5-534267-9
	△	73.66[2.900]	76.20[3.000]	60	△	5-534267-8
	△	48.26[1.900]	50.80[2.000]	40	△	5-534267-7
OBSOLETE	△	30.48[1.200]	33.02[1.300]	26	△	5-534267-6
OBSOLETE	△	7.62[.300]	10.16[.400]	8	△	5-534267-5
OBSOLETE	△	99.06[3.900]	101.60[4.000]	80	△	5-534267-4
	△	10.16[.400]	12.70[.500]	10	△	5-534267-3
	△	22.86[.900]	25.40[1.000]	20	△	5-534267-2
	△	15.24[.600]	17.78[.700]	14	△	5-534267-1
FINISH		B	A	NO OF POSN		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRM	M. BINNER	08NOV2002		TE Connectivity
DIMENSIONS: mm [INCHES]		CHK	J. OLSON	08NOV02		RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, DUAL ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU
TOLERANCES UNLESS OTHERWISE SPECIFIED:		P/PC		J. OLSON	NAME	
0 P/PC ± .005		1 P/PC ± .005		108-25022		APPLICATION SPEC
2 P/PC ± .010		3 P/PC ± .015		114-25018		SIZE ONE CODE DRAWING NO
4 P/PC ± .020		5 P/PC ± .030		HEIGHT -		A2 00779 C=534267
MATERIAL		FINISH		CUSTOMER DRAWING		RESTRICTED TO
				SCALE 1:1 SHEET 2 of 2		REV AB3