

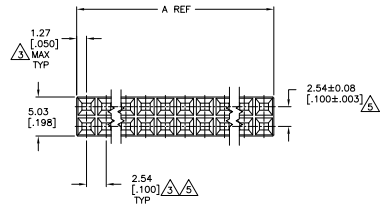



SEE SHEET 2
 FOR P/N'S -51 THRU -90



- △ HOUSING: FLAME RETARDANT, GLASS FILLED, THERMOPLASTIC, COLOR: BLACK. CONTACT: PHOSPHOR BRONZE
- △ CONTACT: DUPLEX PLATED 0.76µm[0.00030] GOLD IN CONTACT AREA, 3.81-7.62µm[0.00150-0.00300] BRIGHT TIN-LEAD ON LEADS, ALL OVER 1.27µm[0.00050] NICKEL
- △ THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS
- △ PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- △ TOLERANCE IS NON-CUMULATIVE.
- △ 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- △ POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- △ POINT-OF-CONTACT DIMENSION.
- △ TE CONNECTIVITY TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- △ NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- △ CONTACT: DUPLEX PLATED 0.76µm[0.00030] GOLD IN CONTACT AREA, 3.81-7.62µm[0.00150-0.00300] MATTE TIN ON LEADS, ALL OVER 1.27µm[0.00050] NICKEL
- △ ROHS 2002/95/EC COMPLIANT
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△△ SUPERCEDED BY 9-534998-0

99.06 [3.900]	101.60 [4.000]	80	4-534998-0
98.52 [3.900]	99.06 [3.900]	78	3-534998-9
93.98 [3.700]	96.52 [3.800]	76	3-534998-8
91.44 [3.600]	93.98 [3.700]	74	3-534998-7
B	A	NO OF POSN	PART NUMBER

△△ OBSOLETE	88.90 [3.500]	91.44 [3.600]	72	3-534998-6
△△ SUPERCEDED BY 8-534998-4	86.36 [3.400]	88.90 [3.500]	70	3-534998-5
△△ OBSOLETE	83.82 [3.300]	86.36 [3.400]	68	3-534998-4
△△ OBSOLETE	81.28 [3.200]	83.82 [3.300]	66	3-534998-3
△△ OBSOLETE	78.74 [3.100]	81.28 [3.200]	64	3-534998-2
△△ OBSOLETE	76.20 [3.000]	78.74 [3.100]	62	3-534998-1
△△ OBSOLETE	73.66 [2.900]	76.20 [3.000]	60	3-534998-0
△△ OBSOLETE	71.12 [2.800]	73.66 [2.900]	58	2-534998-9
△△ OBSOLETE	68.58 [2.700]	71.12 [2.800]	56	2-534998-8
△△ SUPERCEDED BY 7-534998-6	66.04 [2.600]	68.58 [2.700]	54	2-534998-7
△△ OBSOLETE	63.50 [2.500]	66.04 [2.600]	52	2-534998-6
△△ OBSOLETE	60.96 [2.400]	63.50 [2.500]	50	2-534998-5
△△ OBSOLETE	58.42 [2.300]	60.96 [2.400]	48	2-534998-4
△△ OBSOLETE	55.88 [2.200]	58.42 [2.300]	46	2-534998-3
△△ OBSOLETE	53.34 [2.100]	55.88 [2.200]	44	2-534998-2
△△ OBSOLETE	50.80 [2.000]	53.34 [2.100]	42	2-534998-1
△△ OBSOLETE	48.26 [1.900]	50.80 [2.000]	40	2-534998-0
△△ OBSOLETE	45.72 [1.800]	48.26 [1.900]	38	1-534998-9
△△ OBSOLETE	43.18 [1.700]	45.72 [1.800]	36	1-534998-8
△△ OBSOLETE	40.64 [1.600]	43.18 [1.700]	34	1-534998-7
△△ OBSOLETE	38.10 [1.500]	40.64 [1.600]	32	1-534998-6
△△ OBSOLETE	35.56 [1.400]	38.10 [1.500]	30	1-534998-5
△△ OBSOLETE	33.02 [1.300]	35.56 [1.400]	28	1-534998-4
△△ OBSOLETE	30.48 [1.200]	33.02 [1.300]	26	1-534998-3
△△ OBSOLETE	27.94 [1.100]	30.48 [1.200]	24	1-534998-2
△△ OBSOLETE	25.40 [1.000]	27.94 [1.100]	22	1-534998-1
△△ OBSOLETE	22.86 [900]	25.40 [1000]	20	1-534998-0
△△ OBSOLETE	20.32 [800]	22.86 [900]	18	534998-9
△△ OBSOLETE	17.78 [700]	20.32 [800]	16	534998-8
△△ OBSOLETE	15.24 [600]	17.78 [700]	14	534998-7
△△ OBSOLETE	12.70 [500]	15.24 [600]	12	534998-6
△△ OBSOLETE	10.16 [400]	12.70 [500]	10	534998-5
△△ OBSOLETE	7.62 [300]	10.16 [400]	8	534998-4
△△ OBSOLETE	5.08 [200]	7.62 [300]	6	534998-3
△△ OBSOLETE	2.54 [100]	5.08 [200]	4	534998-2
△△ OBSOLETE	-	2.54 [100]	2	534998-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IN REVISION (REVISED) DATE

TE Connectivity
 RECEPTACLE ASSEMBLY, MOD N,
 DOUBLE ROW, DUAL ENTRY, 1000,100CL,
 VERTICAL MOUNT, AMPRODU

114-25018
 108-25022
 114-25018
 108-25022

DATE: 11/11/07
 DRAWN BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]

CUSTOMER DRAWING: [Signature]
 SHEET: 4.1 OF 2 PAGES

