

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	BY
AD	00			
P1		REVISED PER ECO-11-004587	11MAR11	RK HMR

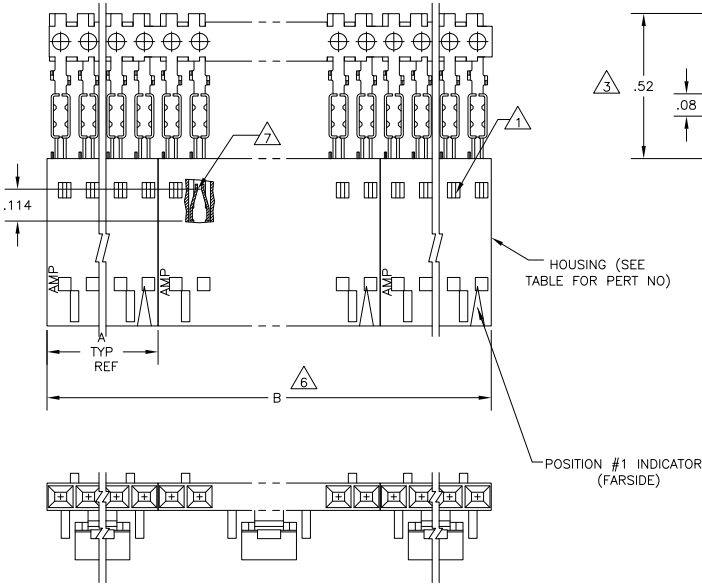

EXMPL: STRIP ASSEMBLY SCALE 2:1

2	2.40	1.198	1-104257-1	12	6-103958-1
2	2.20	1.098	1-104257-0	11	6-103958-0
2	2.00	.998	104257-9	10	5-103958-9
2	1.80	.898	104257-8	9	5-103958-8
2	1.60	.798	104257-7	8	5-103958-7
2	1.40	.698	104257-6	7	5-103958-6
4	2.39	.598	104257-5	6	5-103958-5
4	1.99	.498	104257-4	5	5-103958-4
5	1.99	.398	104257-3	4	5-103958-3
8	2.40	.298	104257-2	3	5-103958-2
10	2.00	.198	104257-1	2	5-103958-1
2	1.60	.798	104257-7	8	1-103958-6
4	1.99	.498	104257-4	5	1-103958-5
5	1.99	.398	104257-3	4	1-103958-4
8	2.40	.298	104257-2	3	1-103958-3
10	2.00	.198	104257-1	2	1-103958-2
2	2.40	1.198	1-104257-1	12	1-103958-1
2	2.20	1.098	1-104257-0	11	1-103958-0
2	2.00	.998	104257-9	10	103958-9
2	1.80	.898	104257-8	9	103958-8
2	1.60	.798	104257-7	8	103958-7
2	1.40	.698	104257-6	7	103958-6
4	2.39	.598	104257-5	6	103958-5
4	1.99	.498	104257-4	5	103958-4
5	1.99	.398	104257-3	4	103958-3
8	2.40	.298	104257-2	3	103958-2
10	2.00	.198	104257-1	2	103958-1

- ▲ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- ▲ USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- ▲ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- ▲ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103734
- ▲ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- ▲ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- ▲ MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- ▲ .000030 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ▲ .000030 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ▲ PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- ▲ .000030 GOLD IN THE CONTACT AREA. .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.

PLATING	▲	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
---------	---	---	---	---------------------	------------	-------------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT. **TE** TE Connectivity

DESIGNED BY: L. A. MAYER 11-4-06	DATE: 11-4-06
CHECKED BY: P. de Jong 11-12-06	DATE: 11-12-06
APPROVED BY: P. de Jong 11-12-06	DATE: 11-12-06
PRODUCT SPEC: 108-25034	NAME: RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM
APPLICATION SPEC: 114-25026	SIZE: 1 CASE CODE (FORMING NO)
MATERIAL FINISH: SEE TABLE	RESTRICTED TO: A2 00779 C=103958
HOUSING: SEE TABLE	CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1 of 1 REV: P1