

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		K2		REVISED PER ECO-11-004917	11MAR11	RK	HMR

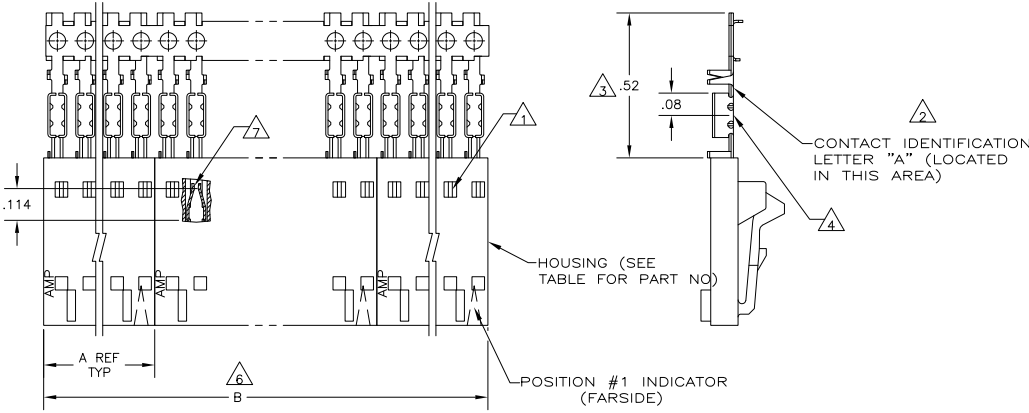

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △ USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103897
- △ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △ MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- △ .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- △ .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	△	2	2.40	1.198	1-104257-1	12	6-103961-1
△ OBSOLETE	△	2	2.20	1.098	1-104257-0	11	6-103961-0
△	△	2	2.00	.998	104257-9	10	5-103961-9
△	△	2	1.80	.898	104257-8	9	5-103961-8
△	△	2	1.60	.798	104257-7	8	5-103961-7
△	△	2	1.40	.698	104257-6	7	5-103961-6
△	△	4	2.39	.598	104257-5	6	5-103961-5
△	△	4	1.99	.498	104257-4	5	5-103961-4
△	△	5	1.99	.398	104257-3	4	5-103961-3
△	△	8	2.40	.298	104257-2	3	5-103961-2
△	△	10	2.00	.198	104257-1	2	5-103961-1
△ OBSOLETE	△	2	2.40	1.198	1-104257-1	12	1-103961-1
△ OBSOLETE	△	2	2.20	1.098	1-104257-0	11	1-103961-0
△	△	2	2.00	.998	104257-9	10	103961-9
△	△	2	1.80	.898	104257-8	9	103961-8
△	△	2	1.60	.798	104257-7	8	103961-7
△	△	2	1.40	.698	104257-6	7	103961-6
△	△	4	2.39	.598	104257-5	6	103961-5
△	△	4	1.99	.498	104257-4	5	103961-4
△	△	5	1.99	.398	104257-3	4	103961-3
△	△	8	2.40	.298	104257-2	3	103961-2
△	△	10	2.00	.198	104257-1	2	103961-1
PLATING	△	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	



EXAMPLE: STRIP ASSEMBLY SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES 0 PLG ± .010 1 PLG ± .010 2 PLG ± .010 3 PLG ± .010 4 PLG ± .010 ANGLES ± .010 FINISH SEE TABLE	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLG ± .010 1 PLG ± .010 2 PLG ± .010 3 PLG ± .010 4 PLG ± .010 ANGLES ± .010 FINISH SEE TABLE	DATE: 11-4-06 NAME: L.A. MAYER DATE: 11-12-06 NAME: P. de Jong DATE: 11-13-06 NAME: J. SCHIEFER PRODUCT SPEC: 108-25034 APPLICATION SPEC: 114-25026 HEIGHT: - CUSTOMER DRAWING	DATE: 11-4-06 NAME: L.A. MAYER DATE: 11-12-06 NAME: P. de Jong DATE: 11-13-06 NAME: J. SCHIEFER PRODUCT SPEC: 108-25034 APPLICATION SPEC: 114-25026 HEIGHT: - CUSTOMER DRAWING	RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L ROW, .100, LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE, STRIP FORM SIZE: 108-25034 DATE CODE: 11-13-06 DRAWING NO: A200779 C=103961	TE Connectivity RESTRICTED TO SCALE: 4:1 SHEET: 1 of 1 REV: K2
--	---	---	---	---	--

103961

A