



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		H	EC	063C 0759 04	29JAN05	BSV	JLG
		H1		REVISED PER ECO-09-020689	02SEP09	KK	AEG

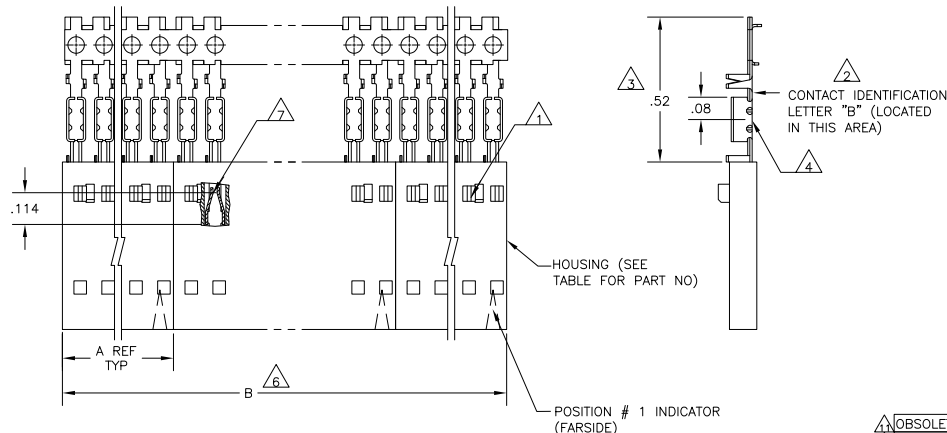

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103900
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	△	2	2.40	1.198	1-103648-1	12	6-103970-1
△ OBSOLETE	△	2	2.20	1.098	1-103648-0	11	6-103970-0
△ OBSOLETE	△	2	2.00	0.998	103648-9	10	5-103970-9
△ OBSOLETE	△	2	1.80	0.898	103648-8	9	5-103970-8
△ OBSOLETE	△	2	1.60	0.798	103648-7	8	5-103970-7
△ OBSOLETE	△	2	1.40	0.698	103648-6	7	5-103970-6
△ OBSOLETE	△	4	2.39	0.598	103648-5	6	5-103970-5
△ OBSOLETE	△	4	1.99	0.498	103648-4	5	5-103970-4
△	△	5	1.99	0.398	103648-3	4	5-103970-3
△	△	8	2.40	0.298	103648-2	3	5-103970-2
△	△	10	2.00	0.198	103648-1	2	5-103970-1
△ OBSOLETE	△	2	2.40	1.198	1-103648-1	12	1-103970-1
△ OBSOLETE	△	2	2.20	1.098	1-103648-0	11	1-103970-0
△ OBSOLETE	△	2	2.00	0.998	103648-9	10	103970-9
△ OBSOLETE	△	2	1.80	0.898	103648-8	9	103970-8
△ OBSOLETE	△	2	1.60	0.798	103648-7	8	103970-7
△ OBSOLETE	△	2	1.40	0.698	103648-6	7	103970-6
△ OBSOLETE	△	4	2.39	0.598	103648-5	6	103970-5
△	△	4	1.99	0.498	103648-4	5	103970-4
△	△	5	1.99	0.398	103648-3	4	103970-3
△	△	8	2.40	0.298	103648-2	3	103970-2
△	△	10	2.00	0.198	103648-1	2	103970-1
PLATING	△	B	A		HOUSING PART NUMBER 1 REQD	NO OF POSN PER ASSY	ASSEMBLY PART NUMBER ON STRIP

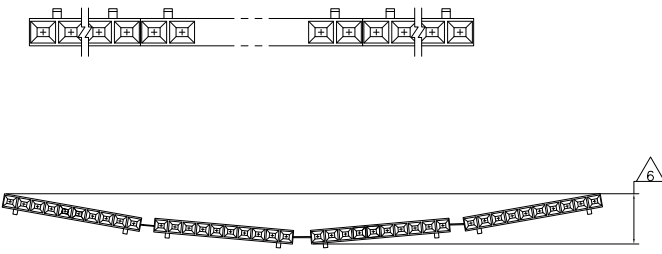

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 05 NOV 1986

DESIGNED BY: L. MAYER
 CHECKED BY: P. C. DEJONG
 APPROVED BY: P. C. DEJONG

TYCO ELECTRONICS CORPORATION
 Harrisburg, Pa 17105-3608

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

SIZE: A2 00779 ©=103970

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: H1