

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|-------|
| AD | 00 | P | LTR | DESCRIPTION | DATE | BY | APP'D |
| | | K | | EC 063C 0760 04 | 25DEC04 | BSV | JLG |
| | | K1 | | REVISED PER ECO-09-020774 | 26AUG09 | KK | AEG |

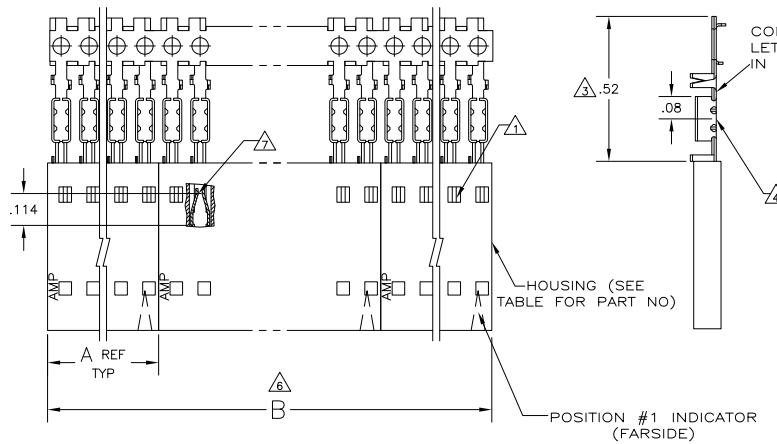

EXAMPLE: STRIP ASSEMBLY SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS.
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103903
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS).
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055
- 9 .000030 GOLD IN THE CONTACT AREA, .000100-.000200 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 .000030 GOLD IN THE CONTACT AREA, .000100-.000200 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 .000030 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | | | | | | |
|------------|---|----|------|-------|---------------------|------------|-------------------------------|
| △ OBSOLETE | △ | 2 | 2.40 | 1.198 | 1-103688-1 | 12 | 6-103979-1 |
| △ OBSOLETE | △ | 2 | 2.20 | 1.098 | 1-103688-0 | 11 | 6-103979-0 |
| △ OBSOLETE | △ | 2 | 2.00 | .998 | 103688-9 | 10 | 5-103979-9 |
| △ OBSOLETE | △ | 2 | 1.80 | .898 | 103688-8 | 9 | 5-103979-8 |
| △ OBSOLETE | △ | 2 | 1.60 | .798 | 103688-7 | 8 | 5-103979-7 |
| △ OBSOLETE | △ | 2 | 1.40 | .698 | 103688-6 | 7 | 5-103979-6 |
| △ OBSOLETE | △ | 4 | 2.39 | .598 | 103688-5 | 6 | 5-103979-5 |
| △ | △ | 4 | 1.99 | .498 | 103688-4 | 5 | 5-103979-4 |
| △ | △ | 5 | 1.99 | .398 | 103688-3 | 4 | 5-103979-3 |
| △ | △ | 8 | 2.40 | .298 | 103688-2 | 3 | 5-103979-2 |
| △ | △ | 10 | 2.00 | .198 | 103688-1 | 2 | 5-103979-1 |
| △ OBSOLETE | △ | 2 | 2.40 | 1.198 | 1-103688-1 | 12 | 1-103979-1 |
| △ OBSOLETE | △ | 2 | 2.20 | 1.098 | 1-103688-0 | 11 | 1-103979-0 |
| △ OBSOLETE | △ | 2 | 2.00 | .998 | 103688-9 | 10 | 103979-9 |
| △ OBSOLETE | △ | 2 | 1.80 | .898 | 103688-8 | 9 | 103979-8 |
| △ OBSOLETE | △ | 2 | 1.60 | .798 | 103688-7 | 8 | 103979-7 |
| △ OBSOLETE | △ | 2 | 1.40 | .698 | 103688-6 | 7 | 103979-6 |
| △ OBSOLETE | △ | 4 | 2.39 | .598 | 103688-5 | 6 | 103979-5 |
| △ | △ | 4 | 1.99 | .498 | 103688-4 | 5 | 103979-4 |
| △ | △ | 5 | 1.99 | .398 | 103688-3 | 4 | 103979-3 |
| △ | △ | 8 | 2.40 | .298 | 103688-2 | 3 | 103979-2 |
| △ | △ | 10 | 2.00 | .198 | 103688-1 | 2 | 103979-1 |
| PLATING | △ | B | A | | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER ON STRIP |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: L. MAYER 5 NOV 86
 CHECKED BY: P. C. DEJONG 12 NOV 86
 DRAWN BY: P. C. DEJONG 12 NOV 86

TYCO ELECTRONICS CORPORATION
 Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L FOR #26-30 AWG WIRE SIZE, STRIP FORM

SIZE: 108-25034
 APPLICATION SPEC: 114-25026
 WEIGHT: -
 FINISH: -

HOUSING: SEE TABLE

CUSTOMER DRAWING

SCALE: 4:1 SHEET 1 OF 1 REV K1

AMP 1471-9 REV 31MM2000