THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	YR
© COPYRIGHT 20	ALL RIGHTS RESERVED.	

LOC	DIST
AD	47

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REVISED PERECO-11-013132	13JUL2011	HNR	MH

1. PHOSPHOR BRONZE
2. LCP, UL94V-0
3. CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
4. CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
5. REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
6. APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
7. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
8. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
9. HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759 CLEARANCE FOR M3x0.5 THREAD

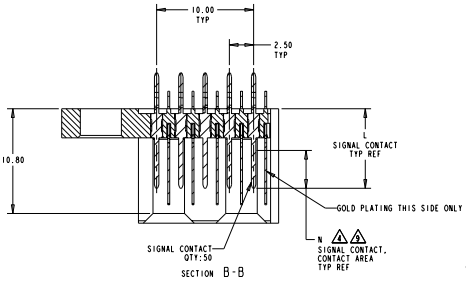

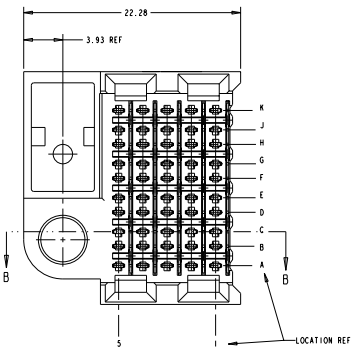

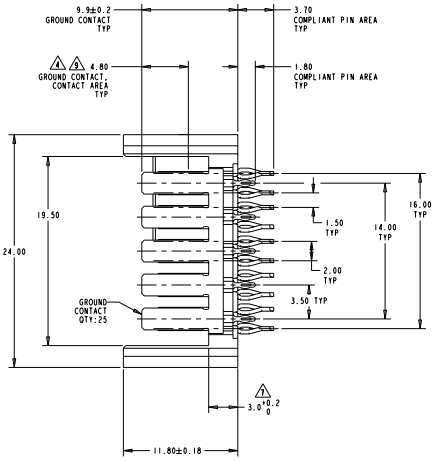



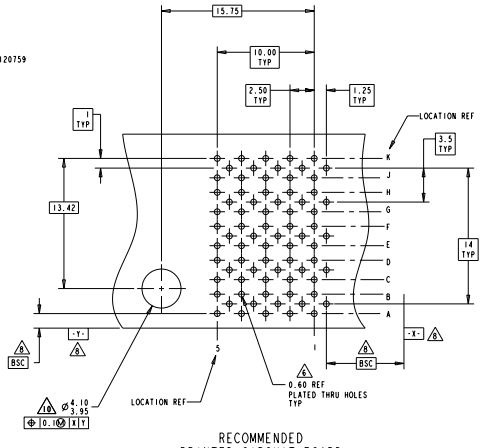

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.30	9.7	120661-2
3.90	8.2	120661-1
M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13
3 PLC ±0.05
ANGLES ±-

MATERIAL
HOUSING: 2
CONTACTS: 2

FINISH -
SIGNAL CONTACT: 4

DRN	C MOLL	23APR99
CHK	KW ANDREWS	23APR99
APVD	KW ANDREWS	23APR99
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

TE Connectivity

HEADER ASSEMBLY, 50 POSITION, RIGHT HAND, 10 ROW, Z PACK HS3

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-120661	-

CUSTOMER DRAWING

SCALE 5:1 | SHEET 1 OF 1 | REV H

Downloaded from Elcodis.com electronic components distributor