

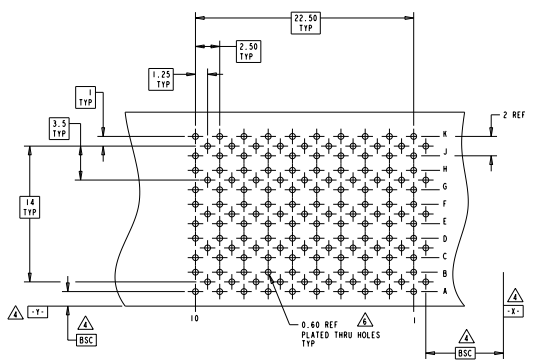
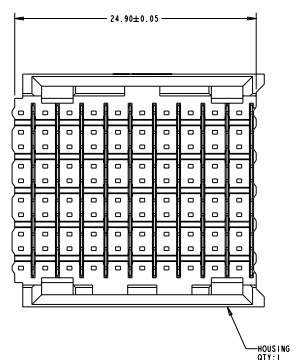


REVISED PER ECO-11-013132		DATE	BY	CHK
B	REVISED PER ECO-11-013132	13.06.2011	MMR	MM

- △ CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957, BASED ON TELECOM/DA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- △ PHOSPHOR BRONZE
- △ GLASS FILLED POLYESTER
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- △ DRILLED HOLE DIAMETER 0.75±0.025  
 FINISHED HOLE DIA 0.66±0.05 REF  
 COPPER THICKNESS 0.025±0.010  
 TIN LEAD THICKNESS 0.004±0.010
- △ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT  
 TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- △ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD

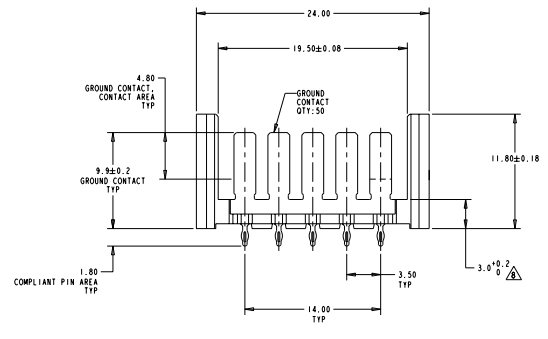

RECOMMENDED  
 PRINTED CIRCUIT BOARD  
 LAYOUT  
 COMPONENT SIDE OF PRINTED CIRCUIT BOARD



120663-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 11.2009	BY: M. J. ANDREWS
DESIGNED BY: M. J. ANDREWS	DATE: 28.10.09
DR: M. J. ANDREWS	DATE: 28.10.09
CHK: M. J. ANDREWS	DATE: 28.10.09
APP: M. J. ANDREWS	DATE: 28.10.09
PROJ: M. J. ANDREWS	DATE: 28.10.09
REV: M. J. ANDREWS	DATE: 28.10.09
ISSUE: M. J. ANDREWS	DATE: 28.10.09
DATE: 11.2009	BY: M. J. ANDREWS
DATE: 11.2009	BY: M. J. ANDREWS
DATE: 11.2009	BY: M. J. ANDREWS
DATE: 11.2009	BY: M. J. ANDREWS

SHROUD ASSEMBLY, 100 POSITION,  
 10 ROW, BACKPLANE CONNECTOR,  
 Z-PACK HSC

STATE CASE CODE (SEARCH TO)  
 A 00778 ©-120663

REVISIONS TO  
 SHEET 5:1 OF 142 B