
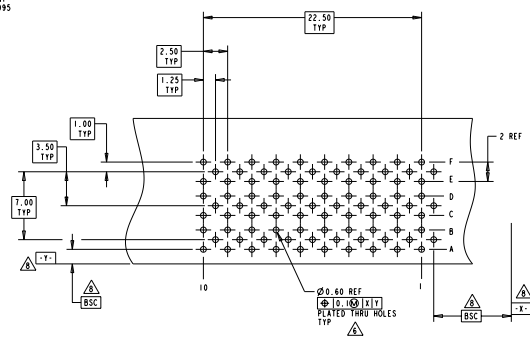
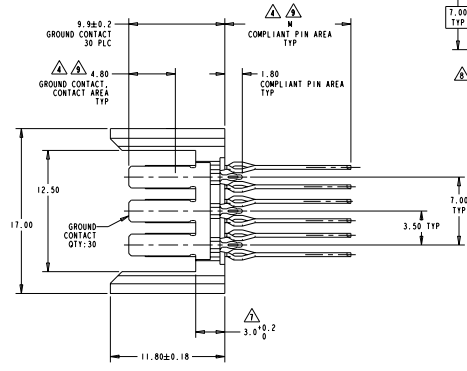

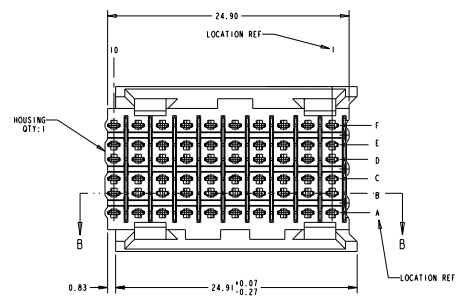


DATE REVISIONS TO IMPLEMENTED	REVISIONS FOR PUBLICIZATION	1998
COMPONENT 1998	ALL RIGHTS RESERVED	

REV	DATE	DESCRIPTION	BY	CHK	APPV
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					

- ▲ PHOSPHOR BRONZE
- ▲ LCP, UL94V-0
- ▲ CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF THE CONNECTIVITY PRODUCT SPECIFICATION 100-1557, BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- ▲ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- ▲ REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- ▲ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- ▲ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- ▲ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

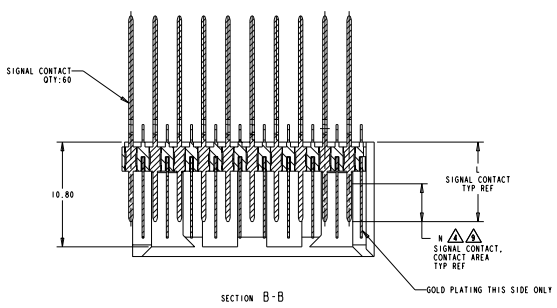

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.30	14.50	9.7	120679-2
3.90	13.00	8.2	120679-1
N	M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 5-23-99

REVISED PER ECO-11-013132

TE Connectivity

HEADER ASSEMBLY, 60 POSITION, 5 ROW, FEED THROUGH, BACKPLANE CONNECTOR, 2-PACK HS3

SCALE CODE: DRAWING NO. 00779 ©=120679

CUSTOMER DRAWING