


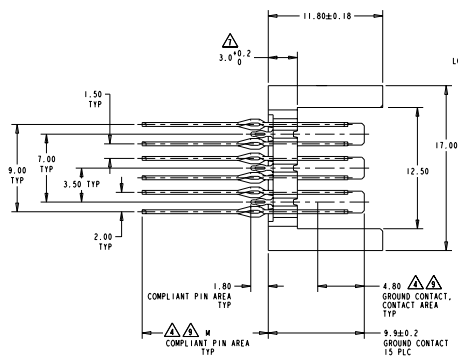
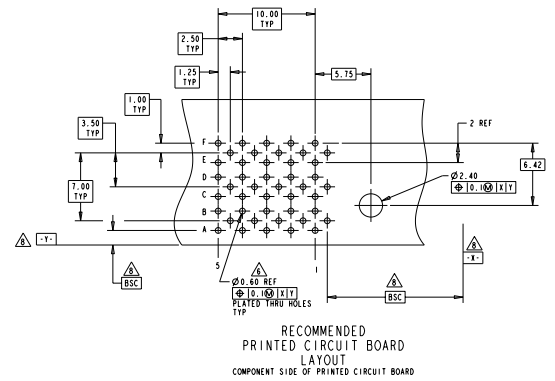


REVISED		REVISIONS			
REV	BY	DESCRIPTION	DATE	CHK	APP
H	AD	REVISED PERECO-11-013132	13.JUN.2011	DMR	MM

- △ PHOSPHOR BRONZE
- △ LCP, UL94V-0
- △ CONTACT WATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- △ REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- △ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

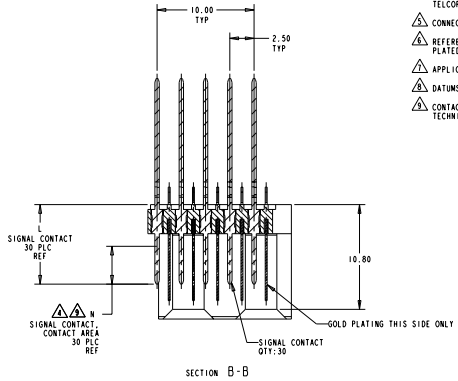

5.30	14.50	9.7	120681-2
3.90	13.00	8.2	120681-1
N	M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 5-25-99

REVISED: 5-25-99

DATE: 5-25-99

TE Connectivity

HEADER ASSEMBLY, 30 POSITION, FEED THROUGH, LEFT HAND, 6 ROW, 2-PACK RES

STATE: CA CASE CODE: 120681-2

REV: A 00778 ©=120681

CUSTOMER DRAWING

SHEET 5:1 OF 1