


三角法 (THIRD ANGLE PROJECTION)

© 1979年 日本エー・エム・ピー株式会社
AMP社の複製は特許又は特許出願中

© 1979BY AMP (Japan) Ltd.
ALL RIGHTS RESERVED AMP
PRODUCTS COVERED BY PATENTS
AND/OR PATENTS PENDING.

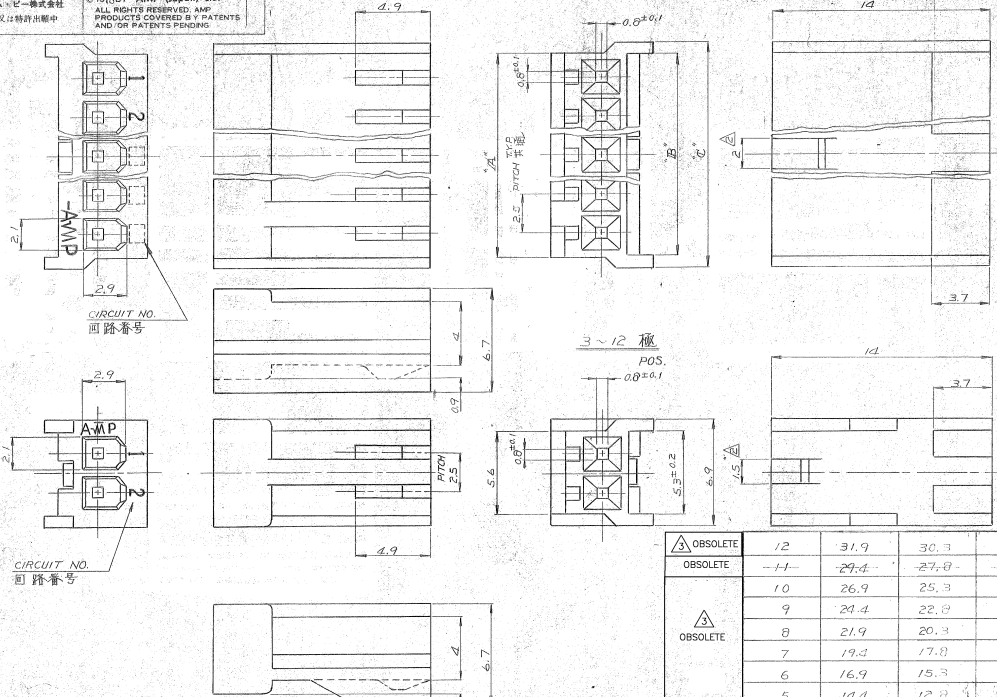

NOTES:
1. CONTACTS, 170262 & 170263, ARE USED.
△ LOCKING DIMPLE IS PLACED ON THE CENTER OF HOUSING.
△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.REWAD/D.SINSI

注記:
1. 使用するコンタクトは 170262 & 170263.
△ ロッキング凸部位置は長手方向の中央.

△ OBSOLETE	12	31.9	30.3	30.0	3	3-	2	1-	2
OBSOLETE	11	29.4	27.8	28.1	3	3-	1	1-	1
	10	26.9	25.3	25.6	3	3-	0	1-	0
	9	24.4	22.8	23.1	4	2-	1	1-	1
△ OBSOLETE	8	21.9	20.3	20.6	4	2-	0	1-	0
	7	19.4	17.8	18.1	4	2-	0	1-	0
	6	16.9	15.3	15.6	4	2-	0	1-	0
	5	14.4	12.8	13.1	4	2-	0	1-	0
OBSOLETE	4	11.9	10.3	10.6	4	2-	0	1-	0
	3	9.4	7.8	8.1	4	2-	0	1-	0
△ OBSOLETE	2	6.9	5.3	5.6	4	2-	0	1-	0
	1	4.4	2.8	3.1	4	2-	0	1-	0

種数 NUMBER OF CIRCUIT	C	B*0.2	A	青色 BLUE	黒色 BLACK	自然色 NATURAL
型番 PART NUMBER	C-171880					
材 (MATERIAL)	66 NYLON (UL 94V-0)		公差 TOLERANCE EXCEPT AS NOTED	± 0.3		
色 (COLOR)	SEE TABLE					
DR	T. Doi 1-23-78					
CHK	E. Takaguchi 1-24-78					
DE	Batabo 1-24-78					
APP	Batabo 1-24-78					
名 (NAME)	ハウジング					
SIZE	B		LOC	J		
号 (NO.)	C-171880					
尺 (SCALE)	4-1		REV.	C1		
SHEET	1 OF 1					

C1	REVISED PER ECO-09-022424	KK	AEO	30SEP
C	ECN J8-4980			10-30
B1	REVISED			10-1
B	REVISED (J8-4953)			9-20
A	REVISED (J8-4842)			6-7
O	RELEASED (J8-4694)			1-24
LTR	変更 (REVISION RECORD)	DR.	CHK.	DATE

AMP J 030-2 REV. 12/74

(CUSTOMER DRAWING) 参考図面