


△ ロッキング凹部位置は長手方向の中央。
 △ 塩ビケース製製品(自動挿入型)は図号172800参照のこと。
 △ プリント基板穴径は下記参照してください。


加工	パンチ加工穴	ドリル加工穴
穴径	0.9 ± 0.1	1.1 ± 0.05

△ LOCKING HOLE IS PLACED ON THE CENTER OF POST HEADER.
 △ REFERENCE TO P/N 172800 ABOUT TUBE PACKING ITEM FOR AUTO MOUNTING MACHINE.
 △ RECOMMENDED HOLE DIA DIMENSION ON PWB

HOLE DIA	POUNCHED HOLE	DRILL HOLE
φE	0.9 ± 0.1	1.1 ± 0.05



BULE 藍色	30.0	27.5	11	12	5-172800-2	5-172732-2
	25.0	22.5	9	10	5-0	5-0
	22.5	20.0	8	9	4-9	4-9
	20.0	17.5	7	8	4-8	4-8
	17.5	15.0	6	7	4-7	4-7
	15.0	12.5	5	6	4-6	4-6
	12.5	10.0	4	5	4-5	4-5
	10.0	7.5	3	4	4-4	4-4
	7.5	5.0	2	3	4-3	4-3
	5.0	2.5	2	2	4-172800-2	4-172732-2
BLACK 黒色	30.0	27.5	11	12	3-172800-2	3-172732-2
	25.0	22.5	9	10	3-0	3-0
	22.5	20.0	8	9	2-9	2-9
	20.0	17.5	7	8	2-8	2-8
	17.5	15.0	6	7	2-7	2-7
	15.0	12.5	5	6	2-6	2-6
	12.5	10.0	4	5	2-5	2-5
	10.0	7.5	3	4	2-4	2-4
	7.5	5.0	2	3	2-3	2-3
	5.0	2.5	2	2	2-172800-2	2-172732-2
NATURAL 自然色	30.0	27.5	11	12	1-172800-2	1-172732-2
	25.0	22.5	9	10	1-0	1-0
	22.5	20.0	8	9	1-9	1-9
	20.0	17.5	7	8	1-8	1-8
	17.5	15.0	6	7	1-7	1-7
	15.0	12.5	5	6	1-6	1-6
	12.5	10.0	4	5	1-5	1-5
	10.0	7.5	3	4	1-4	1-4
	7.5	5.0	2	3	1-3	1-3
	5.0	2.5	2	2	172800-2	172732-2

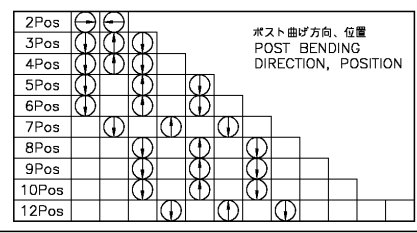

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN: A. IMAI	06MAR84		Tyco Electronics AMP K.K. Kawasaki, Japan
0 PLC ± 0.3 1 PLC ± 0.3 2 PLC ± 0.3 3 PLC ± 0.3 4 PLC ± 0.3	FINISH 仕上 POST: TIN-PLATE	CHK: N. NONQUE	06MAR84		NAME 名称 POST HEADER ASSY (VERTICAL) WITH KINK AMP EI SERIES CONNECTOR
MATERIAL 材料 HSG: 66NYLON UL94V-0 POST: BRASS	APPLICATION SPEC 取付専用規格	APVD: N. NONQUE	06MAR84	SIZE: A3	CAGE CODE: 00779
CUSTOMER DRAWING			WEIGHT	DRAWING NO: 172732	RESTRICTED TO: -
			SCALE: 4:1	SHEET: 1 OF 1	REV: E