THIS DRAWING IS UNPUBLISHED
VERTRAULICHE UNVEROEFFENTLICHE ZEICHNUNG
RELEASE FOR PUBLIKATION ,2000
FREI FUER VEROEFFENTLICHUNG
© COPYRIGHT 2000 BY AMP INCORPORATED ALL RIGHTS RESERVED
ALLE RECHTE VORBEHALTEN

MATED WITH: 1102075
PASSEND ZU:

LOC	DIST
AI	-

PROJEKT NR. EGGMN04419

REVISIONS AENDERUNGEN					
P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
D1		NEW CSA LOGO ADDED ECR-08-020094	11.08.2008	SR	ST

CONTACT ARRANGEMENT
VIEW FROM CONECTING SIDE

A (2 : 1)

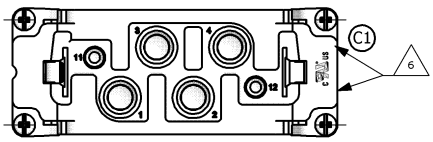

0-1 AS SHOWN
ORDERING TEXT: HMX.4/2.BU.S

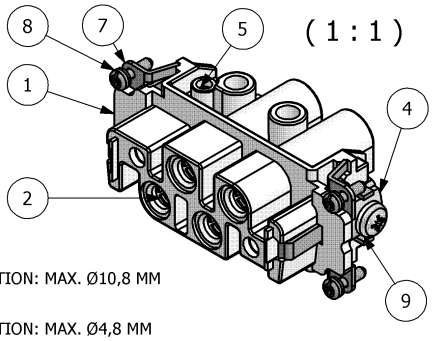

(1 : 1)

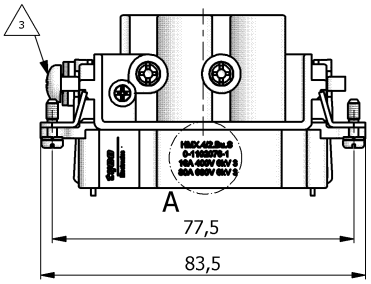



NOTES

1 POWER CONTACT: 1 TO 4
OUTER DIMENSIONS OF INSULATION: MAX. Ø10,8 MM

2 SIGNAL CONTACT: 11 AND 12
OUTER DIMENSIONS OF INSULATION: MAX. Ø4,8 MM

△3 GROUNDING CONTACT

4 SUITABLE HOOD SIZE 6: SERIES HB; HD; EMV AND HIP

5 STANDARDS:
DIN EN 61984; DIN EN 60664-1

△6 UL; CSA AUTHORISATION

7 PACKAGING:
5 PIECES IN A CARTON

CONTACT ARRANGEMENT
VIEW FROM TERMINATION SIDE



* DISTANCE FOR GUARANTEED
CONTACT MAX. 21 mm



PANET CUT-OUT CONTACT INSERT
WHEN USED WITHOUT HOUSING

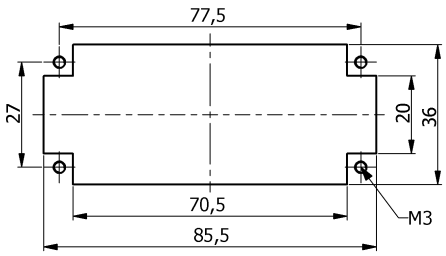

QTY.	DESCRIPTION	MATERIAL	SURFACE	COLOR	NOTE	ITEM
1	SCREW	STEEL	NICKEL PLATED	BLUE	DIN EN ISO 1207-M5X8	9
4	FIXING SCREW	STEEL	NICKEL PLATED	BLUE	M3X10,5	8
2	SOCKET GROUNDING CONTACT	BRASS	NICKEL PLATED	BLUE	-	7
4	THREAD PIN	STEEL	NICKEL PLATED	BLUE		6
2	CONTACT SCREW	STEEL	NICKEL PLATED	BLUE	M3X5,7	5
1	CLAMP TAB	STEEL	NICKEL PLATED	BLUE	---	4
2	SOCKET CONTACT	BRASS	SILVER PLATED	BLUE	·	3
4	SOCKET CONTACT	BRASS	SILVER PLATED	BLUE	-	2
1	FEMALE INSERT	PBT-GF30	-	LIGHT GREY	-	1

PARTS LIST

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT MAY NOT BE MODIFIED WITHOUT AMP'S ENGINEERING ORGANIZATION. SHOULD BE CONTACTED FOR THE LATEST REVISION.
DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT. AENDERUNGEN, DIE DEM TECHNISCHEN FORTSCHRITT DIENEN, SIND VORBEHALTEN. DEN JEWEILS LETZTGUELTIGEN AENDERUNGSSTAND ERFAHREN SIE AUF ANFRAGE.

DIMENSIONS: DIMENSIONEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
n. ISO 8015 -
n. ISO 2768 - mH-E
n. DIN 16901- 140
0 PLC °
1 PLC °
2 PLC °
3 PLC °
ANGLES / WINKEL °

MATERIAL

FINISH / OBERFLAECHE / FARBE

DWN SCHNEIDER 12.07.2005
CHK SCHNURPFEIL 12.07.2005
APVD -
PRODUCT SPEC. PRODUKTSPEZ. 108-74058
APPLICATION SPEC. VERARBEITUNGSSPEZ. 114-74058
WEIGHT GEWICHT 0,126 KG

CUSTOMER DRAWING / KUNDENZEICHNUNG

tyco Electronics
Tyco / Electronics AMP GmbH
D - 53819 Neunkirchen

NAME
FEMALE INSERT
HMX.4/2.BU.S

SIZE A3 | CAGE CODE 00779 | DRAWING NO. ZEICHNUNGS-NR. C- 1102076 | RESTRICTED TO NUR FUER

SCALE MASSSTAB 1:1 | SHEET BLATT 1 | OF VON 1 | REV. D1

AMP 1471-9 REV 27JUN96

This is a TRANSLATED file from Computervision, Inc., Medusa Revision 12.2.5T

Downloaded from Elcodis.com electronic components distributor