

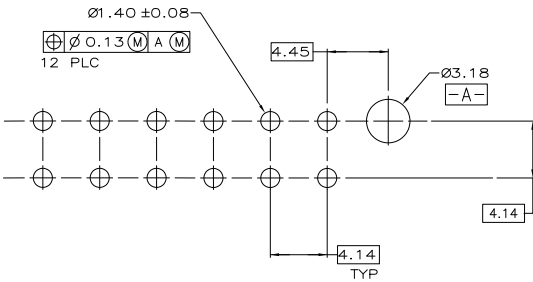
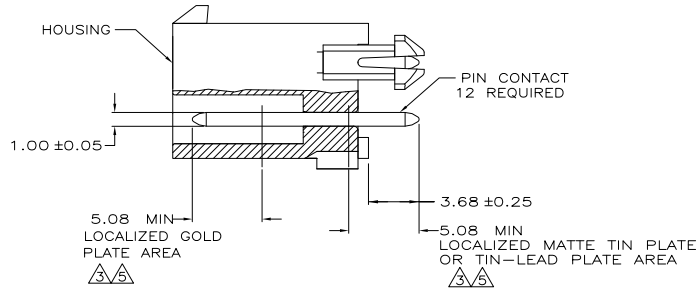


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
CM	0				
	K1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

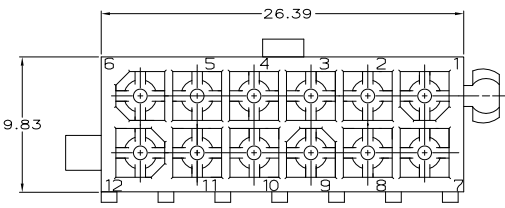

RECOMMENDED HOLE PATTERN FOR 1.57 THICK BOARD

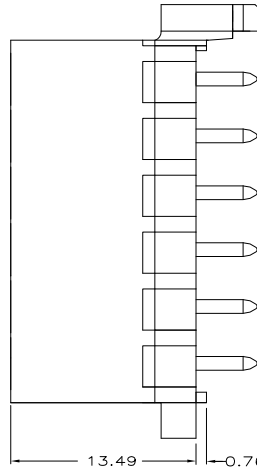

- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-770621-1
BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-770621-0
BRASS, GOLD	3	NYLON, UL94V-0	WHITE	770621-2
BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	770621-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	DESIGNED BY	DATE
DIMENSIONS: mm		S. CARPENTER	OB/JUN05	12AUG2003
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	R. JONES	12AUG2003
0 PLC	±	APPD	R. JONES	
1 PLC	±	PRODUCT SPEC		
2 PLC	±	APPLICATION SPEC		
3 PLC	± 0.15	WEIGHT		
4 PLC	±	CUSTOMER DRAWING		
ANGLES	±	SIZE	A2	00779
FINISH		CAGE CODE	C=770621	
		RESTRICTED TO		
		SCALE	5:1	SHEET 1 of 1
		REV	K1	