
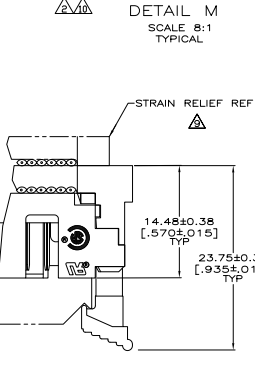


- △ FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; BLACK.
- △ 2.54µm [0.00100] MIN BRIGHT TIN-LEAD ON TERMINATION END, 0.76µm [0.00030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [0.00050] MIN NICKEL.
- △ GOLD FLASH OVER PALLADIUM-NICKEL 0.76µm [0.00030] TOTAL ON CONTACT AREA, 2.54µm [0.00100] MIN BRIGHT TIN-LEAD ON TERMINATION END, ALL OVER 1.27µm [0.00050] MIN NICKEL.
- △ NO SLOT ON THIS END FOR 10 POSITION HOUSINGS.
- △ NO SLOT FOR SNAP-IN POLARIZER ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
- 5. FOR MILITARY POLARIZATION, ORDER SNAP-IN POLARIZER 499991-2 (BULK PACK OF 50).
- △ POSITION NO 1 INDICATOR.
- △ COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- △ PHOSPHOR BRONZE PER QQ-B-750.
- △ STRAIN RELIEF 111547 MUST BE ORDERED SEPARATELY.
- △ 2.54µm [0.00100] MIN MATTE TIN ON TERMINATION END, 0.76µm [0.00030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [0.00050] MIN NICKEL.
- △ GOLD FLASH OVER PALLADIUM-NICKEL 0.76µm [0.00030] TOTAL ON CONTACT AREA, 2.54µm [0.00100] MIN MATTE TIN ON TERMINATION END, ALL OVER 1.27µm [0.00050] MIN NICKEL.
- △ OBSOLETE.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.



△	89.59	81.13	36.83	29	59	60	2-111492-6
△	[3.527]	[3.194]	[1.450]				
△	78.03	68.43	30.48	24	49	50	2-111492-5
△	[3.072]	[2.694]	[1.200]				
△	70.41	60.81	26.67	21	43	44	2-111492-4
△	[2.772]	[2.394]	[1.050]				
△	65.33	55.73	24.13	19	39	40	2-111492-3
△	[2.572]	[2.194]	[.850]				
△	57.71	48.11	20.32	16	33	34	2-111492-2
△	[2.272]	[1.894]	[.800]				
△	52.63	43.03	17.78	14	29	30	2-111492-1
△	[2.072]	[1.694]	[.700]				
△	47.55	37.95	15.24	12	25	26	2-111492-0
△	[1.872]	[1.494]	[.600]				
△	45.01	35.41	13.97	11	23	24	1-111492-9
△	[1.772]	[1.394]	[.550]				
△	39.93	30.33	11.43	9	19	20	1-111492-8
△	[1.572]	[1.194]	[.450]				
△	34.85	25.25	8.89	7	15	16	1-111492-7
△	[1.372]	[.994]	[.350]				
△	32.31	22.71	7.62	6	13	14	1-111492-6
△	[1.272]	[.894]	[.300]				
△	27.23	17.63	5.08	4	9	10	1-111492-5
△	[1.072]	[.694]	[.200]				
△	95.81	86.21	39.37	31	63	64	1-111492-4
△	[3.772]	[3.394]	[1.550]				
△	89.59	81.13	36.83	29	59	60	1-111492-3
△	[3.527]	[3.194]	[1.450]				
△	78.03	68.43	30.48	24	49	50	1-111492-2
△	[3.072]	[2.694]	[1.200]				
△	70.41	60.81	26.67	21	43	44	1-111492-1
△	[2.772]	[2.394]	[1.050]				
△	65.33	55.73	24.13	19	39	40	1-111492-0
△	[2.572]	[2.194]	[.850]				
△	57.71	48.11	20.32	16	33	34	111492-8
△	[2.272]	[1.894]	[.800]				
△	52.63	43.03	17.78	14	29	30	111492-7
△	[2.072]	[1.694]	[.700]				
△	47.55	37.95	15.24	12	25	26	111492-6
△	[1.872]	[1.494]	[.600]				
△	45.01	35.41	13.97	11	23	24	111492-5
△	[1.772]	[1.394]	[.550]				
△	39.93	30.33	11.43	9	19	20	111492-4
△	[1.572]	[1.194]	[.450]				
△	34.85	25.25	8.89	7	15	16	111492-3
△	[1.372]	[.994]	[.350]				
△	32.31	22.71	7.62	6	13	14	111492-2
△	[1.272]	[.894]	[.300]				
△	27.23	17.63	5.08	4	9	10	111492-1
△	[1.072]	[.694]	[.200]				

CONTACT FINISH	E	D	C	B	A	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. (P) PERSONAL (F) FIDELITY (S) SECURITY (M) MILITARY (C) COMMERCIAL (I) INDUSTRIAL (A) AEROSPACE (S) SPACE (N) NUCLEAR (E) ELECTRONIC (M) MEDICAL (L) LABORATORY (R) RESEARCH (D) DEFENSE (G) GOVERNMENT (O) OTHER							
UNIVERSAL I/O PIN CONNECTOR, WITHOUT MOUNTING ENDS, WITH STD COVER LATCHES/AMP-LATCH							
CUSTOMER DRAWING							