

4

3


2

1




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	F	LNK	DESCRIPTION	DATE	BY	APPD
		R1		REVISED PER ECO-11-005140	29MAR11	RK	HMR

TERMINAL QUANTITY 50
BLUE COLOR DOT LOCATED IN CENTER

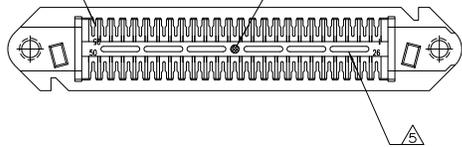

- THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- ALL DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- MATERIAL: HOUSING - THERMOPLASTIC. TERMINAL - HIGH STRENGTH COPPER ALLOY PLATED WITH 0.76µm [.000030] MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [.000030] MIN TOTAL ON MATING SURFACE, OVER 1.27µm [.000050] MIN NICKEL PLATING.
- WIRE SIZE: 24 & 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.14[.045] IS ACCEPTABLE FOR MOST APPLICATIONS.
- CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF AMP INCORPORATED.

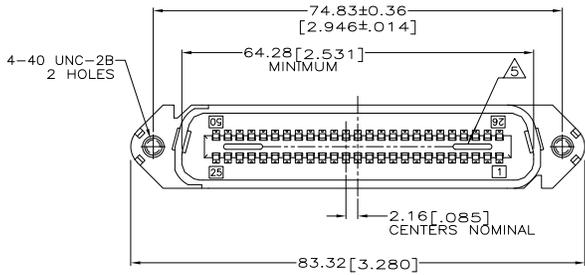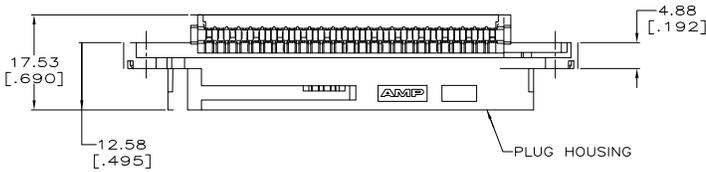

GRAY	229974-4
BLACK	229974-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR	R. HUSSEY	10 JAN 80	
DIMENSIONS: mm [INCHES]		CHK	V. G. SLACK	11 JAN 80	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APR	B. WARD	11 JAN 80	NAME
0 PLC	± .005	PRODUCT SPEC:			
1 PLC	± .002	APPLICATION SPEC:			
2 PLC	± .001	WEIGHT			
3 PLC	± .0005	SIZE CASE CODE DRAWING NO			
4 PLC	± .0002	CUSTOMER DRAWING			
ANGLES	± .0001	SCALE 2:1 SHEET 1 of 1 REV R1			
FINISH	AS MANUFACTURED	RESTRICTED TO			

TE Connectivity

PLUG ASSEMBLY, 50 POSITION, B-SLOT, WITH 4-40 HOLES, CHAMP-LOK®