




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

CONNECTOR ASSEMBLY
EXEMPLARY LOADED

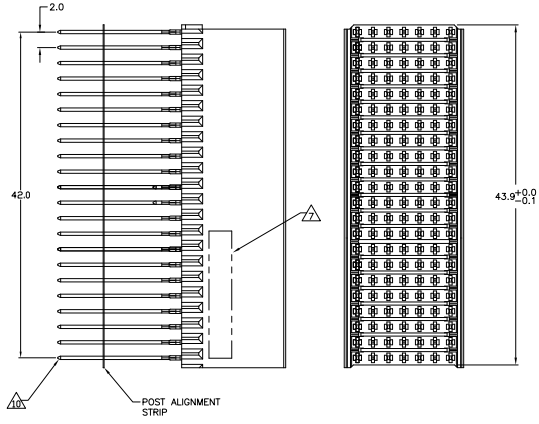


CONTACT DIMENSIONS
SCALE 5:1

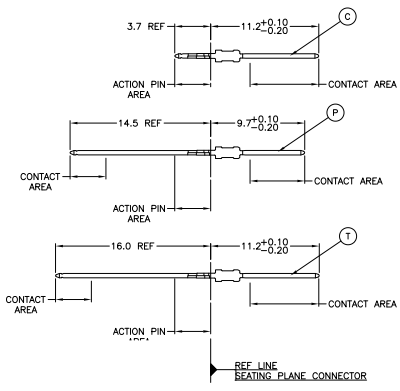

CONTACT LAYOUT

	z	a	b	c	d	e	f
1	T	P	P	P	P	P	T
2	T	P	P	P	P	P	T
3	T	P	P	P	P	P	T
4	T	P	P	P	P	P	T
5	T	P	P	P	P	P	T
6	T	P	P	P	P	P	T
7	T	P	P	P	P	P	T
8	T	P	P	P	P	P	T
9	T	P	P	P	P	P	T
10	T	P	P	P	P	P	T
11	C	P	P	P	P	P	C
12	C	P	P	P	P	P	C
13	T	P	P	P	P	P	T
14	T	P	P	P	P	P	T
15	T	P	P	P	P	P	T
16	T	P	P	P	P	P	T
17	T	P	P	P	P	P	T
18	T	P	P	P	P	P	T
19	T	P	P	P	P	P	T
20	T	P	P	P	P	P	T
21	T	P	P	P	P	P	T
22	T	P	P	P	P	P	T

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

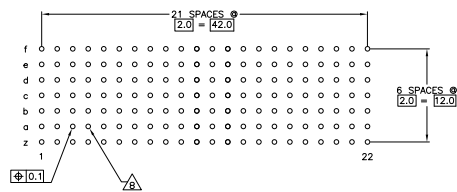

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

OBsolete	1-352712-9
	352712-9
	352712-4
	352712-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	10/2008	Yao Electronics Corporation
DESIGNED BY	J. CARBO	DATE	10/2008	Harrisburg, Pa 17105-3608
APPROVED BY	J. CARBO	DATE	10/2008	
DATE	10/2008	DESCRIPTION	MALE ASSEMBLY, 2-PACK 2mm HM, TYPE B	
REV	1	REVISED BY	J. CARBO	REVISED DATE
REV	2	REVISED BY	J. CARBO	REVISED DATE
REV	3	REVISED BY	J. CARBO	REVISED DATE
REV	4	REVISED BY	J. CARBO	REVISED DATE
REV	5	REVISED BY	J. CARBO	REVISED DATE
REV	6	REVISED BY	J. CARBO	REVISED DATE
REV	7	REVISED BY	J. CARBO	REVISED DATE
REV	8	REVISED BY	J. CARBO	REVISED DATE
REV	9	REVISED BY	J. CARBO	REVISED DATE
REV	10	REVISED BY	J. CARBO	REVISED DATE
REV	11	REVISED BY	J. CARBO	REVISED DATE
REV	12	REVISED BY	J. CARBO	REVISED DATE
REV	13	REVISED BY	J. CARBO	REVISED DATE
REV	14	REVISED BY	J. CARBO	REVISED DATE
REV	15	REVISED BY	J. CARBO	REVISED DATE
REV	16	REVISED BY	J. CARBO	REVISED DATE
REV	17	REVISED BY	J. CARBO	REVISED DATE
REV	18	REVISED BY	J. CARBO	REVISED DATE
REV	19	REVISED BY	J. CARBO	REVISED DATE
REV	20	REVISED BY	J. CARBO	REVISED DATE
REV	21	REVISED BY	J. CARBO	REVISED DATE
REV	22	REVISED BY	J. CARBO	REVISED DATE

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.
 © 2008 TELCORDIA TECHNOLOGIES, INC. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	APP'D
00				
		SEE SHEET 1		

- △ MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIRONMENT APPLICATIONS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- △ FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- △ FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- △ TO BE MEASURED AT BOTTOM OF SHROUD.
- △ CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY: J. CASRO	DATE: 11/08/02	Telcordia Corporation Harrisburg, Pa 17105-3608	
DRAWN BY: J. CASRO		DESIGNED BY: J. CASRO	DATE: 11/08/02	MALE ASSEMBLY, 2-PACK 2mm HM, TYPE B	
CHECKED BY: J. CASRO		DESIGNED BY: J. CASRO	DATE: 11/08/02	DRAWING NO: 114-19029	
APPROVED BY: J. CASRO		DESIGNED BY: J. CASRO	DATE: 11/08/02	REV: A1 00779 (Q=352712)	
CUSTOMER DRAWING		DATE: 4.1		SHEET 2 OF 2	