
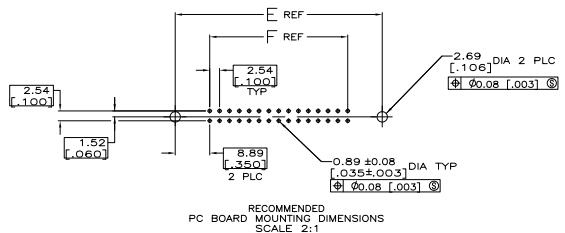
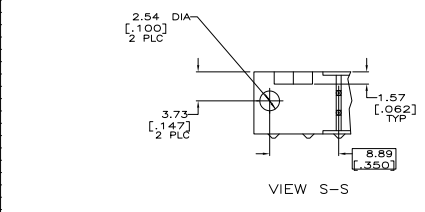

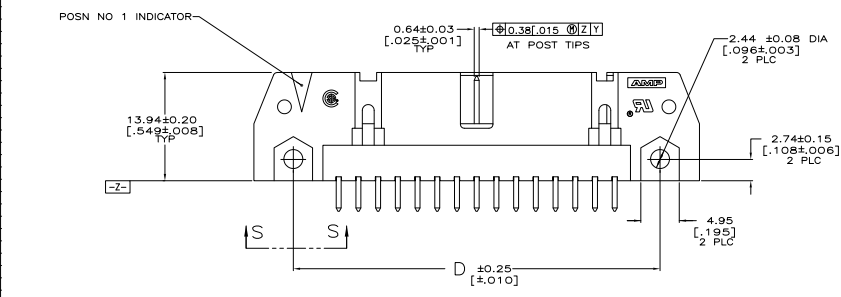
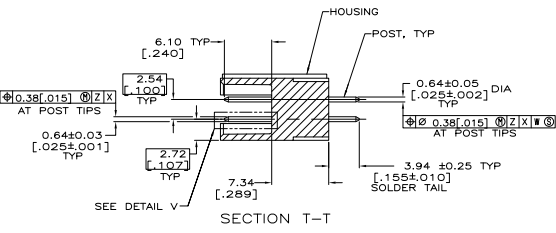


REV	DATE	DESCRIPTION	BY	CHK	APP
00					
M		REVISED PER ECO-08-00045	20MORP	JDP	SLB
MT		REVISED PER ECO-09-00042	OBSEPO	KK	AEG

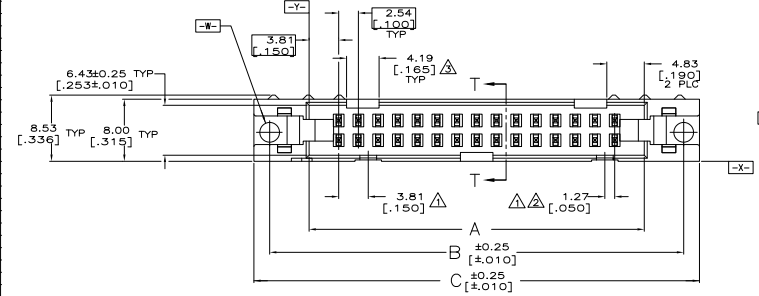

- △ COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
 - △ 8, 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
 - △ 8 AND 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
 - 4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 3.18 [.125].
 - △ MATERIAL:
 HOUSING: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED; BLACK.
 POSTS: PH, BRONZE OR BRASS.
 - △ POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76μm[.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST. -OR- 0.76μm[.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
 - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- | OBSELETE | 7.62 | 25.40 | 19.30 | 29.46 | 25.40 | 15.24 | 8 | 1-102156-4 |
|----------|--------|-------|-------|--------|-------|-------|----|------------|
| OBSELETE | 53.34 | 71.12 | 65.02 | 75.18 | 71.12 | 60.96 | 44 | 1-102156-3 |
| | 78.74 | 96.52 | 90.42 | 100.58 | 96.52 | 86.36 | 64 | 1-102156-2 |
| | 83.10 | 93.80 | 83.56 | 93.86 | 83.80 | 73.40 | 64 | 1-102156-1 |
| | 73.66 | 91.44 | 85.34 | 95.50 | 91.44 | 81.28 | 60 | 1-102156-1 |
| | 2.900 | 3.600 | 3.360 | 3.760 | 3.600 | 3.200 | 40 | 102156-9 |
| | 60.96 | 78.74 | 72.64 | 82.80 | 78.74 | 68.58 | 50 | 1-102156-0 |
| | 2.400 | 3.100 | 2.860 | 3.260 | 3.100 | 2.700 | 40 | 102156-9 |
| | 48.26 | 66.04 | 59.94 | 70.10 | 66.04 | 55.88 | 40 | 102156-8 |
| | 1.900 | 2.600 | 2.360 | 2.760 | 2.600 | 2.200 | 34 | 102156-8 |
| | 40.64 | 58.42 | 52.32 | 62.48 | 58.42 | 48.26 | 34 | 102156-8 |
| | 11.600 | 2.300 | 2.060 | 2.460 | 2.300 | 1.900 | 30 | 102156-7 |
| | 35.56 | 53.34 | 47.24 | 57.40 | 53.34 | 43.18 | 30 | 102156-7 |
| | 1.400 | 2.100 | 1.860 | 2.260 | 2.100 | 1.700 | 26 | 102156-6 |
| | 30.48 | 48.26 | 42.16 | 52.32 | 48.26 | 38.10 | 26 | 102156-6 |
| | 1.200 | 1.900 | 1.660 | 2.060 | 1.900 | 1.500 | 24 | 102156-5 |
| | 27.94 | 45.72 | 39.62 | 49.78 | 45.72 | 35.56 | 24 | 102156-5 |
| | 1.100 | 1.800 | 1.560 | 1.960 | 1.800 | 1.400 | 20 | 102156-4 |
| | 22.86 | 40.64 | 34.54 | 44.70 | 40.64 | 30.48 | 20 | 102156-4 |
| | 1.900 | 1.600 | 1.360 | 1.760 | 1.600 | 1.200 | 16 | 102156-3 |
| | 17.78 | 35.56 | 29.46 | 39.62 | 35.56 | 25.40 | 16 | 102156-3 |
| | 1.700 | 1.400 | 1.160 | 1.560 | 1.400 | 1.000 | 14 | 102156-2 |
| | 15.24 | 33.02 | 26.92 | 37.08 | 33.02 | 22.86 | 14 | 102156-2 |
| | 1.600 | 1.300 | 1.060 | 1.460 | 1.300 | 1.000 | 10 | 102156-1 |
| | 10.16 | 27.94 | 21.84 | 32.00 | 27.94 | 17.78 | 10 | 102156-1 |
| | 1.400 | 1.100 | .860 | 1.260 | 1.100 | .700 | | |

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
REV	DATE	DESCRIPTION	BY	CHK	APP		

INCHES	UNLESS OTHERWISE SPECIFIED	DATE	11-28-87		
FR	FR	DATE	11-28-87		
REV	DATE	DESCRIPTION	BY	CHK	APP

REV	DATE	DESCRIPTION	BY	CHK	APP

REV	DATE	DESCRIPTION	BY	CHK	APP