

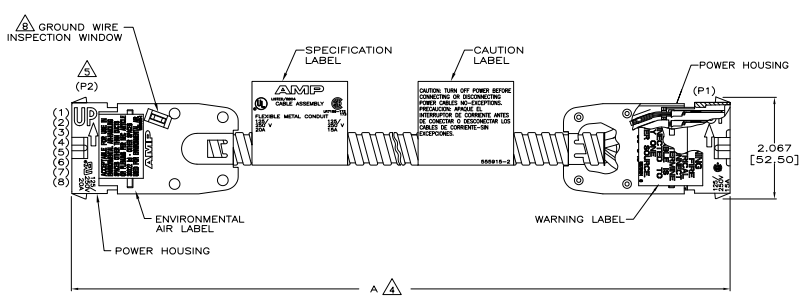
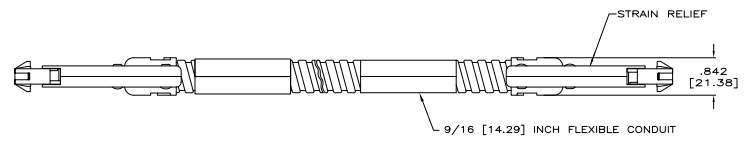


REV	DATE	DESCRIPTION	BY	CHK
AF1	REVISED PER EDD-11-005033		22MM11	RK HMR

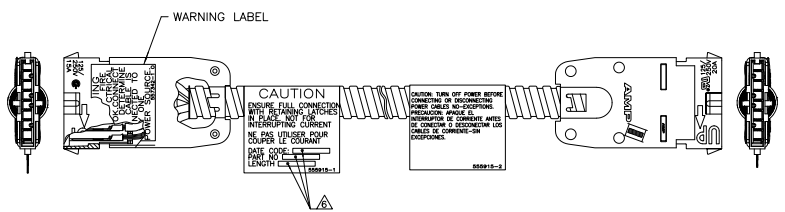

- ⚠ DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ⚠ CABLE ASSEMBLY IS WIRED PER WIRING DIAGRAM.
- ⚠ MATERIAL:
CONNECTOR HOUSINGS - POLYCARBONATE, UL 94V-0, RATED, BLACK.
STRAIN RELIEFS - CARBON STEEL WITH NICKEL PLATING 5.08µm [0.000200] MINIMUM THICK.
CONTACTS - COPPER ALLOY WITH SILVER PLATED STRIP 3.81µm [0.000150] MINIMUM THICK.
- ⚠ DIMENSION A SHALL BE MEASURED WITH CONDUIT IN THE RELAXED POSITION.
- ⚠ DESIGNATIONS IN PARENTHESES () ARE FOR REFERENCE ONLY.
- ⚠ MANUFACTURING LOCATION, DATE CODE, PART NUMBER AND LENGTH SHALL BE INK STAMPED WHERE INDICATED.
- 7. APPLICATION: AMPINERGY™ MODULAR POWER DISTRIBUTION SYSTEM, A MANUFACTURED WIRING SYSTEM.
- ⚠ USE GROUND WIRE INSPECTION WINDOW TO VERIFY BONDING AND GROUNDING CONDUCTOR.

5-556127-5	15.24	50.00
8-556127-8	12.19	40.00
8-556127-7	9.14	30.00
7-556127-1	7.62	25.00
7-556127-9	6.10	20.00
3-556127-3	4.57	15.00
5-556127-6	3.05	10.00
2-556127-7	1.52	5.00
1-556127-5	1.22	4.00
1-556127-8	0.91	3.00
2-556127-4	0.81	2.00

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity
 CABLE ASSEMBLY, POWER TO POWER, 8 WIRE

DATE: 00779 (G=556127)

CUSTOMER DRAWING