

Specification Status: Released

Maximum Electrical Rating

Operating Voltage: 16Vdc
Interrupt Current: 60A

Chip Size: 5 x 7mm

Leads: Nickel
0.125mm nominal thickness

Tape: Polyester (White)
6.5 mm nominal width

Marking: (Color: Green)
Manufacturer's Mark

✕ W21 — Part Identification

□□□□ — Lot Identification

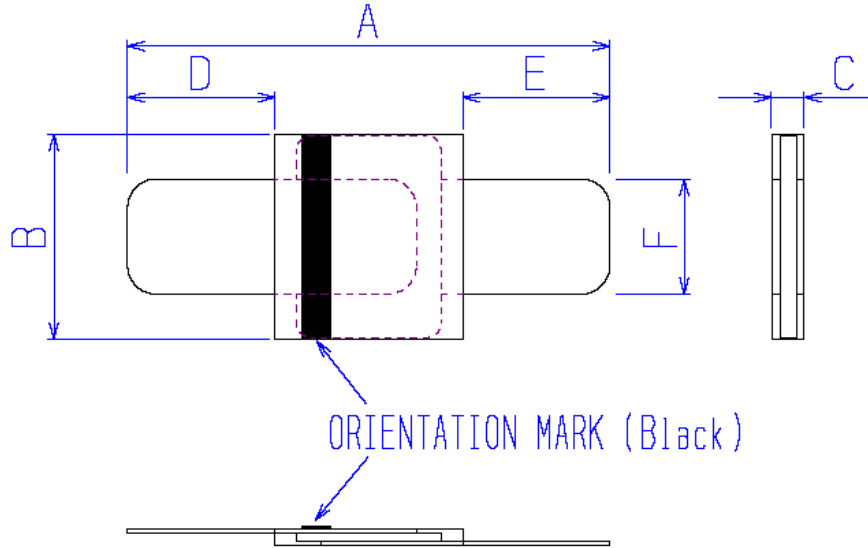


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	15.4	17.5	6.9	7.3	0.6	0.8	4.0	6.2	4.0	6.2	3.9	4.1
in*:	(0.61)	(0.69)	(0.27)	(0.29)	(0.02)	(0.03)	(0.16)	(0.24)	(0.16)	(0.24)	(0.15)	(0.16)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS									TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION		
	AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C		AMPS AT -°C		SECONDS AT 25°C, 10.5A					OHMS AT 25°C	
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MIN	MAX	MIN	MAX	
2.1	2.9	6.7	2.1	5.0	1.0	3.0	---	---	---	5	0.018	0.030	0.018	0.060	1.8

Agency Recognitions:
Reference Documents:
Precedence:
Effectivity:
CAUTION:
Materials Information:

UL, TUV, CSA
PS300
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2000/53/EC
Compliant

Directive 2002/95/EC
Compliant

