




THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.
 © 2015 BY TYS ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
A	0512-0215-05	REVISED PER EC	JDF	CS	
B	10-019054	ECR-	DP	MO	

**CONNECTOR ASSEMBLY
EXAMPLARY LOADED**

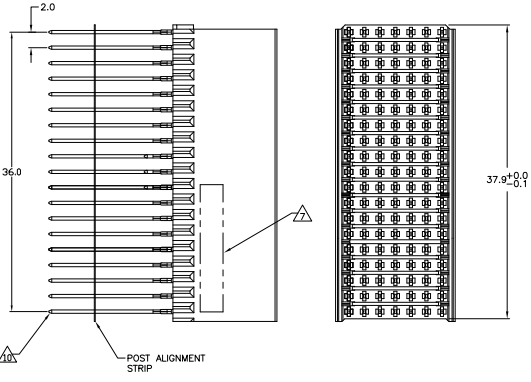


CONTACT DIMENSIONS
SCALE 5:1

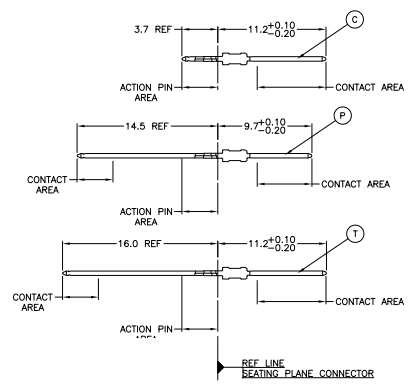

CONTACT LAYOUT

	z	a	b	c	d	e	f
1	T	P	P	P	P	T	
2	T	P	P	P	P	T	
3	T	P	P	P	P	T	
4	T	P	P	P	P	T	
5	T	P	P	P	P	T	
6	T	P	P	P	P	T	
7	T	P	P	P	P	T	
8	T	P	P	P	P	T	
9	C	P	P	P	P	C	
10	C	P	P	P	P	C	
11	C	P	P	P	P	C	
12	T	P	P	P	P	T	
13	T	P	P	P	P	T	
14	T	P	P	P	P	T	
15	T	P	P	P	P	T	
16	T	P	P	P	P	T	
17	T	P	P	P	P	T	
18	T	P	P	P	P	T	
19	T	P	P	P	P	T	

**RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN**

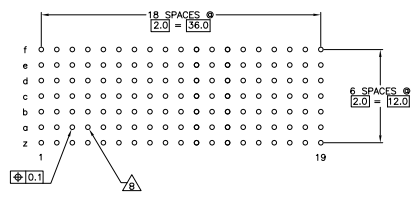

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

OBsolete	1-5352711-9
OBsolete	5352711-9
OBsolete	5352711-4
OBsolete	5352711-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY	SKETCHED BY	DATE	REVISED BY	DATE	REVISED BY	DATE	REVISED BY	DATE
INCHES	mm	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE
114-19029	108-19082	114-19029	108-19082	114-19029	108-19082	114-19029	108-19082	114-19029	108-19082	114-19029
SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE	SEE TABLE

THIS DRAWING IS UNPUBLISHED
 UNLESS INDICATED OTHERWISE
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
00		SEE SHEET 1		

- △ MATERIAL:
 CONTACT: PHOSPHOR BRONZE.
 HOUSING: GLASS-FILLED POLYESTER.
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING
 (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
 PIN: 0.5µm MIN TIN.
 FOR PLATING OF MATING SURFACES SEE APPLICABLE
 SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
 PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
 PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
 CENTRAL OFFICE APPLICATIONS.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
 UNCONTROLLED ENVIRONMENT APPLICATIONS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
 ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
 MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 PATTERN DEFINED BY CONTACT LAYOUT.
- △ FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- △ FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- △ TO BE MEASURED AT BOTTOM OF SHROUD.
- △ CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
 TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY	SKETCHED BY	DATE	REVISED BY	DATE	REVISED BY	DATE	REVISED BY
DRAWN BY		108-19082	108-19082		108-19082		108-19082		108-19082
CHECKED BY		114-19029	114-19029		114-19029		114-19029		114-19029
APPROVED BY									
CUSTOMER DRAWING		DRAWING NO		DATE		ISSUE		REVISED TO	
SEE SHEET 1		A100779		5-352711		4.1		2 B	