

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
DF	DO	F	LN	DATE
		J	REV PER	0114-0287-05
				26OCT05
				PY DM

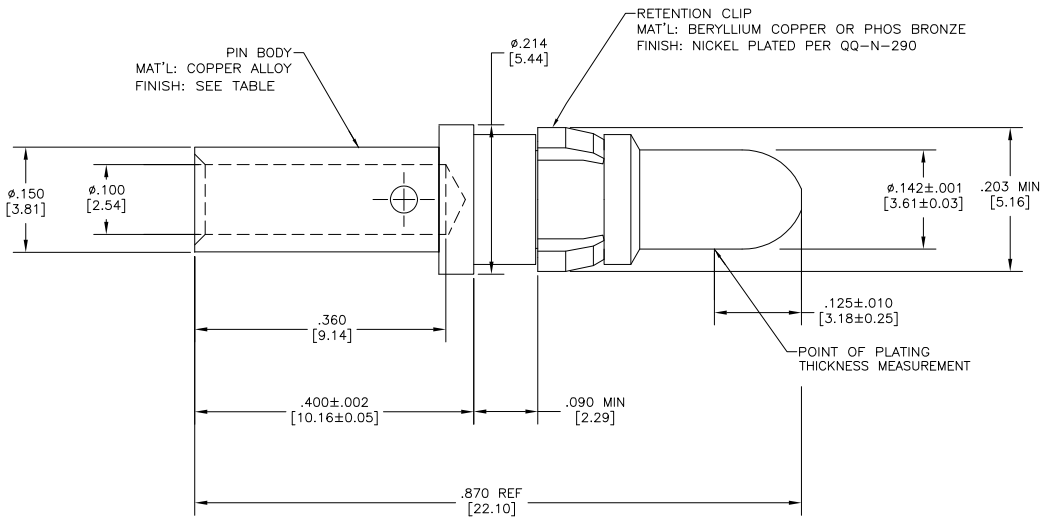

1. THIS PART CONFORMS TO REQUIREMENTS FOR DANIELS CRIMP TOOL NO. M300-BT, WITH DANIELS POSITIONER PART NO. SP689, STRIP LENGTH .375, SETTING #1.
2. MATES WITH 212008-1 IN AMPLIMITE CONNECTOR ASSEMBLIES ONLY.
3. FINISH: PLATED GOLD .000050 [0.00127] MIN THK PER MIL-G-45204 OVER NICKEL .000050 [0.00127] MIN THK PER QQ-N-290.
4. FINISH: PLATED GOLD .000030 [0.00076] MIN THK PER MIL-G-45204 OVER NICKEL .000050 [0.00127] MIN THK PER QQ-N-290.
5. WIRE BARREL WILL ACCEPT #12-#14 AWG WIRE.

△	212007-2
△	212007-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: C.C. THOMAS 11/10/00	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CR: D. MILLER 11/10/00	ASSEMBLY, PIN CONTACT POWER VIII, #12 & #14 AWG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APR: D. MILLER 11/10/00	RESTRICTED TO	
0 PLC	±	PRODUCT SPEC	A2 00779 C=212007	
1 PLC	±	APPLICATION SPEC	SCALE 10:1 SHEET 1 OF 1 REV J	
2 PLC	±	114-10014		
3 PLC	±	WEIGHT		
4 PLC	±	CUSTOMER DRAWING		
ANGLES	±			
MATERIAL	SEE CALLOUTS			
FINISH	SEE TABLE			

AMP 1471-9 REV 31MMR2000