© COPYRIGHT 1996 BY AMP INCORPORATED. ALL RIGHTS RESERVED. (FOR AMP USE ONLY) ALLE RECHTE VORBEHALTEN.

RELEASED FOR PUBLICATION 1995. (FREI FUER VERÖFFENTLICHUNG)

SHEET 1 OF 1 PAGE(NO 2)

LOC A1 DIST –

PRODUCT NO. 95-52199

REVISIONS
ÄNDERUNGEN

| P | LTR | DESCRIPTION BESCHREIBUNG | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | A | Zeichnung erstellt | 10 OCT 96 | Schmitt | – |
| | B | SEE PCN EG00-0029-97, Fase an Rippe hinzu | 13 JAN 97 | Schmitt | – |
| | C | SEE PCN EG00-0828-97, Deckelverrastung geaendert | 10 JUL 97 | Schmitt | – |
| | D | SEE PCN EG00-1048-97, Kammereinsatz geaendert | 08 SEP 97 | Mannh. | – |
| | E | SEE PCN EG00-1108-97, Dichtung war orange | 23 SEP 97 | Schmitt | – |
| | E1 | SEE PCN EG00-1372-97, (6.2) war (7) | 04 DEC 97 | Schmitt | – |
| | E2 | SEE PCN EG00-0366-98-112 | 28 MAY 98 | KEMME | – |
| | F | SEE PCN EGA0-0788-04 | 31-MAR-04 | HEIDH | VB |
| | F1 | SEE PCN E-11-005142 | 17MAR2011 | HEIDH | RH |

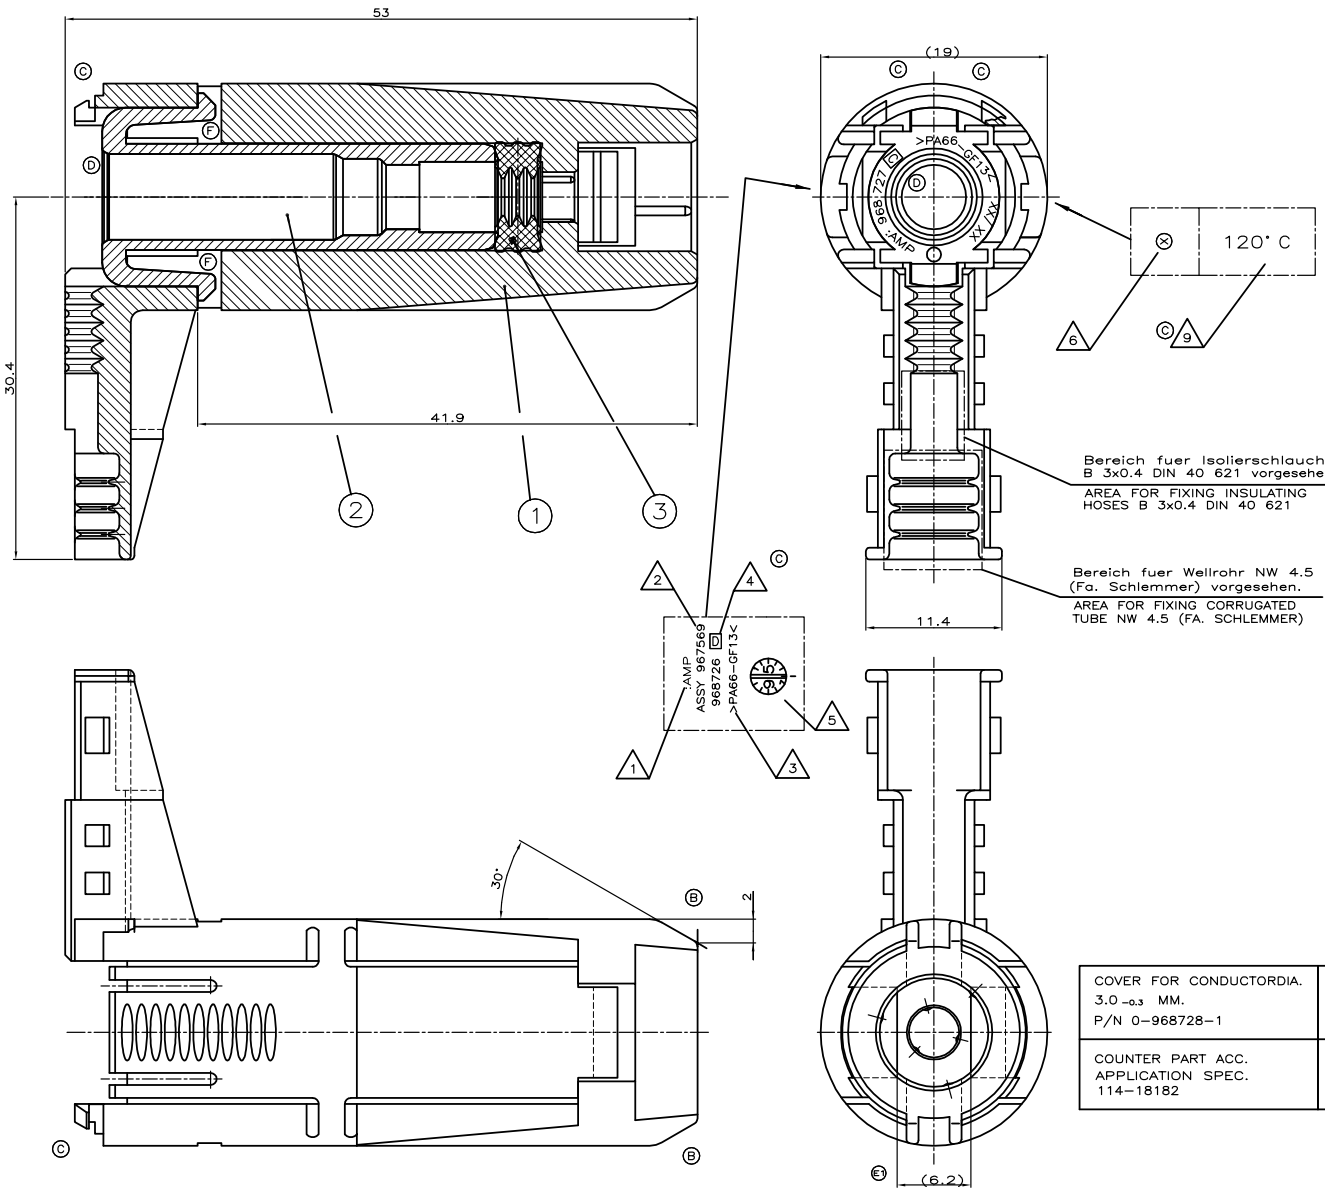


Bemerkungen:
NOTES:

(F1) 1 AMP-Logo oder TE-Logo
AMP-LOGO OR TE-LOGO

2 Bestell-Nr.
ORDER NO.

3 Werkstoffkennzeichnung
MATERIAL MARKING

4 Werkzeugänderungsindex
REVISION NUMBER

5 Produktionsdatum
PRODUCTION DATE

6 Nestmarkierung
CAVITY MARKING

7 Strichzahl ist abhängig von der Verarbeitungsmaschine
PART NUMBER WILL BE DICTATED BY PROCESS

(C) 8 Bei Nichtbenutzung von Wellrohr ist als Leitungsschutz eine Einzelleiterdichtung zu verwenden. Siehe Applicationspec.
IF THERE IS NO USE OF CORRUGATED TUBE PLEASE USE SINGLE WIRE SEAL FOR WIRE PROTECTION.(SEE APPLICATION SPEC.)

(C) 9 Markierung fuer max. Einsatztemperatur
MARKING FOR MAX. OPERATING TEMPERATURE

| | |
|---|---|
| COVER FOR CONDUCTORDIA. 3.0 $_{-0.3}$ MM. P/N 0-968728-1 | Kappe fuer Leiteraussen-durchmesser 3.0 $_{-0.3}$ mm. P/N 0-968728-1 |
| COUNTER PART ACC. APPLICATION SPEC. 114-18182 | Gegenstueck nach APPLICATION SPEC. 114-18182 |

| |
|---|
| 120° C VERSION AMP-PN. 0-967569-1 |
| 200° C VERSION AMP-PN. 0-967568-1 |

| Product Spezification |
|---|
| (C) 108-18589-1 |
| Application Spezification |
| (C) 114-18209-0 |

CONTACTS

| | | | | | | |
|---|---|---|---|---|---|---|
| – | – | – | – | – | – | – |
| – | – | – | – | – | – | – |
| (C) 0-962954-5 | 963244-1 | 2.5mm² Flr | CuNiZn | PLAIN | 2-878689 (A) | 734596-0 |
| AMP ORDER NUMBER | SEAL | WIRE RANGE | MATERIAL | FINISH | CRIMP TOOL APPLICATOR | CRIMP TOOL HAND TOOL |

| CUSTOMER PART NO | AMP PART NO | REV. | POS. | MATERIAL | SURFACE COLOR | DESCRIPTION | FROM NO |
|---|---|---|---|---|---|---|---|
| – | – | – | – | – | – | – | – |
| – | | | 1 | Silikon | (E) schwarz | Dichtung | 3 |
| – | 0-967569-1 | F | 1 | PA66-GF13 | natur | Kammereinsatz | 2 |
| – | | | 1 | PA66-GF13 | schwarz | Bucheengehaeuse | 1 |

THE CONTENTS OF THIS DRAWING ARE THE PROPERTY OF AMP INCORPORATED. ALL RIGHTS RESERVED. NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE PRIOR WRITTEN PERMISSION OF AMP INCORPORATED.

DIMENSIONS: MM
DIMENSIONEN:

TOLERANCES UNLESS OTHERWISE SPECIFIED
ALLGEMEINTOLERANZEN
DIN ISO 2768 mK
DIN ISO 8015 ISO 1101

DIN ISO 286 H7/h6
DIN ISO 286 H8/h7
DIN ISO 286 H11/h11
DIN ISO 286 H14/h14

ANGLES (ANGLE) ±2°
FINISH (OBERFLÄCHE) FARBE –

MATERIAL –

DRN H.Schmitt 10 OCT 96
CHK V.Bergmann 31-MAR-04
APVD –
PRODUCT SPEC PRODUKTSPEZ. –
APPLICATION SPEC VERARBEITUNGSSPEZ. –
WEIGHT GEWICHT –
CUSTOMER DRAWING /KUNDENZEICHNUNG

Tyco Electronics
AMP Deutschland GmbH
D – 63225 Langen

NAME
GLOWPLUG CONNECTOR, ASSY
Gluehkerzenstecker, Assy

SIZE A1 | CAGE CODE 00779 | DRAWING NO (ZEICHNUNGS-NR.) C-967569 | RESTRICTED TO NUR FUER –

MASSSTAB 5:1 | BLATT 1 OF 1 VON 1 | REV F1

AMP 4805 REV 27JUN96 Translated 070308,173436 (YYMMDD,HHMMSS) from Computervision, Inc., Medusa Revision 12.2.5T

Downloaded from Elcodis.com electronic components distributor