

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2006

© COPYRIGHT 2006




Tyco Electronics AMP GmbH

ALL RIGHTS RESERVED.

LOC
A1DIST
-


REVISIONS

P	LTR	DESCRIPTION	DATE	DNW	APVD
B2		ECR-11-002481	03FEB2011	VG	GW
B3		ECR-11-017678	26AUG2011	SR	BR
C1		ECR-11-018403	07SEP2011	OH	BR
C2		ECR-11-021475	18NOV2011	GW	BR

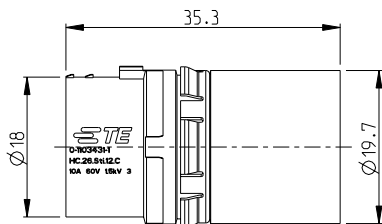

Notes

- SUITABLE HOUSINGS: SERIES HC26
CUSTOMER DRAWING: 1103433, 1103434
- OUTER DIMENSIONS OF INSULATION: MAX. Ø3.2 MM
- SUITABLE CRIMP CONTACTS:
CUSTOMER DRAWING: 827040
- SUITABLE SUB-MIN. COAXICON CONTACTS:
CUSTOMER DRAWING: 51563
- SUITABLE LWL (OPTICS) CONTACTS:
CUSTOMER DRAWING: 216341
- SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
- SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
- STANDARDS:
DIN EN 61984, DIN EN 60664-1
- POLARIZATION RIPS
- PACKAGING:
40 SETS IN A CARTON



PN 0-1 AS SHOWN

B3

1	RETAINING RING	PA66-GF25	GREY	SERIES HC26, INSERT	2
1	MALE INSERT	PBT-GF10	GREY	SERIES HC26, 12-POS. TYPE III+	1
QTY	DESCRIPTION	MATERIAL	SURFACE/COLOR	NOTE	ITEM

PARTS LIST

THIS DRAWING IS A CONTROLLED DOCUMENT.		DNW H.BRAUN 08NOV2007	TE Connectivity	
DIMENSIONS: mm		CHK T.VETTER 28OCT2008	NAME MALE INSERT ASS'Y	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T.SCHNURPFIL 28OCT2008	SERIES HC26, 12-POS., TYPE III+	
0 PLC ±		PRODUCT SPEC 108-74097	POWER 4 NET	
1 PLC ±		APPLICATION SPEC 114-74103	SIZE A3	CAGE CODE 00779
2 PLC ±		WEIGHT -	DRAWING NO C-1103431	RESTRICTED TO -
3 PLC ±		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 of 1
4 PLC ±				REV C2
ANGLES ±				
FINISH -				

1470-19 (3/11)

Pro/ENGINEER DRAWING