

4



3

2





1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2008.
 COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOG	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DM	APVD	
B		REVISED (ECR-09-008712)	16APR09	BH	WK	
B1		REVISED PER ECO-09-024608	02NOV09	KK	AEG	

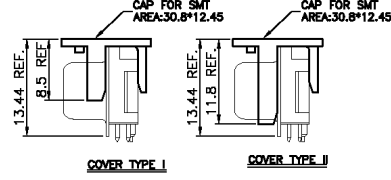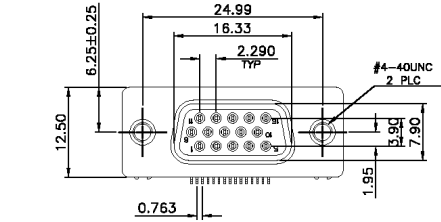

- NOTES:
- MATERIAL:
 HOUSING: PA9T WITH 33% GF, UL 94V-0, COLOR: SEE TABLE.
 CAP: PA6T WITH 30% GF, UL 94V-0, COLOR: SEE TABLE.
 CONTACTS: PHOSPHOR BRONZE.
 SHELL: SPCC.
 BOARDLOCKS: SPCC.
 RIVETS: BRASS.
 - FINISH:
 CONTACTS: GOLD(SEE TABLE) PLATED ON CONTACT AREA, 2.54um[100u"]MIN. MATTE-TIN ON SOLDER TAIL, 1.27um[50u"]MIN. NICKEL UNDERPLATED OVER ALL.
 SHELL: 2.54um[100u"]MIN. NICKEL PLATED.
 BOARDLOCK: 2.54um[100u"] BRIGHT-TIN PLATED, 1.27um[50u"]MIN. NICKEL UNDERPLATED OVER ALL.
 RIVET: 1.27um[50u"]MIN. NICKEL PLATED.
 - RECOMMENDED PCB THICKNESS: 1.6mm.
 109-201, CONDITION B.

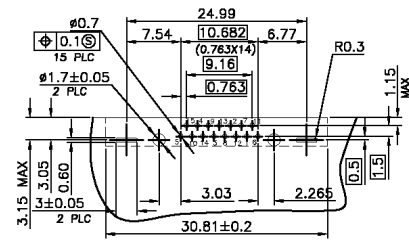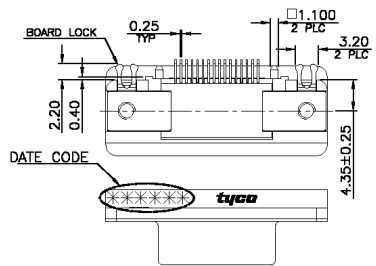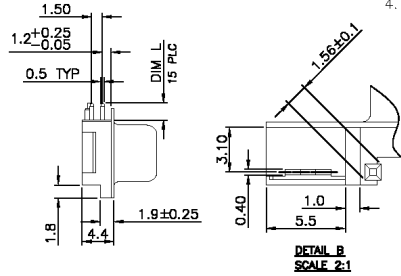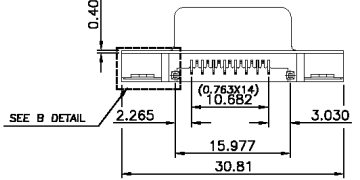

RECOMMENDED PCB LAYOUT
 TOLERANCE:±0.05

PKG TYPE	COVER	DIM. L	HSG COLOR	MINIMUM GOLD PLATED	PART NUMBER
OBSOLETE	TAPE REEL	TYPE III	1.8	BLACK GOLD FLASH	6-1734783-1
	TAPE REEL	TYPE II	1.8	BLUE(661C) GOLD FLASH	5-1734783-1
OBSOLETE	TAPE REEL	TYPE I	2.4	BLACK GOLD FLASH	4-1734783-1
				BLACK 0.381um[15u"]	3-1734783-2
	BLACK GOLD FLASH	3-1734783-1			
	BLUE(661C) 0.381um[15u"]	2-1734783-2			
	BLUE(661C) GOLD FLASH	2-1734783-1			
	BLACK 0.381um[15u"]	1-1734783-2			
OBSOLETE	TUBE	TYPE I	2.4	BLACK GOLD FLASH	1-1734783-1
				BLUE(661C) 0.381um[15u"]	1734783-2
				BLUE(661C) GOLD FLASH	1734783-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWG B. HSING 16APR2009	16APR2009
0 PLC ± -	1 PLC ± 0.30	CHK S. CHIEN 16APR2009	16APR2009
1 PLC ± 0.30	2 PLC ± 0.20	APVD W. KODAMA 16APR2009	16APR2009
3 PLC ± 0.15	4 PLC ± -	PRODUCT SPEC	108-57801
ANGLES ± -	FINISH ± -	QUALIFICATION TEST REPORT	501-57804
MATERIAL SEE NOTE	FINISH SEE NOTE	WEIGHT	5.8 GRAMS
		CUSTOMER DRAWING	

Tyco Electronics Corporation
 Taipei, Taiwan
 SLIM D-SUB 15P FEMALE, REVERSE TYPE
 SIZE: A3 CASE CODE: 00779 DRAWING NO: C-1734783
 RESTRICTED TO: -
 SCALE: - SHEET: 1 of 2 REV: B1

4


3

2





1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
DW		SEE SHEET 1.					

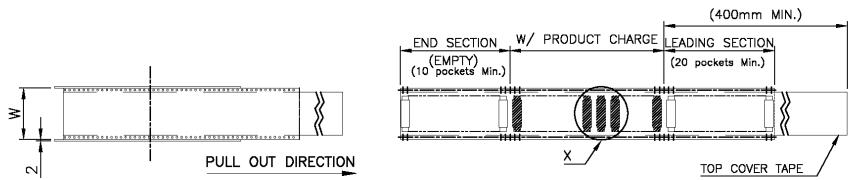

- NOTES:
- MATERIAL :
 - EMBOSSED CARRIER: PS
 - COVER TAPE: PS
 - SHIPPING BOX: CORRUGATED FIBER
 - DIMENSION :
 - REEL: W=56.4, $\phi A=330$
 - SHIPPING BOX: L=350, W=350, H=390
 - QUANTITY :
 - PRIMARY PACKING: 160PCS/REEL
 - SECONDARY PACKING: 6 REELS/BOX(960PCS)
 - WEIGHT :
 - NET WEIGHT: 5.57KG/BOX
 - GROSS WEIGHT: 7.04KG/BOX
 - PEELING RESISTANCE: 0.1~0.7N(10.2gf~71.4gf)
 - PEELING SPEED: 300mm/minutes.

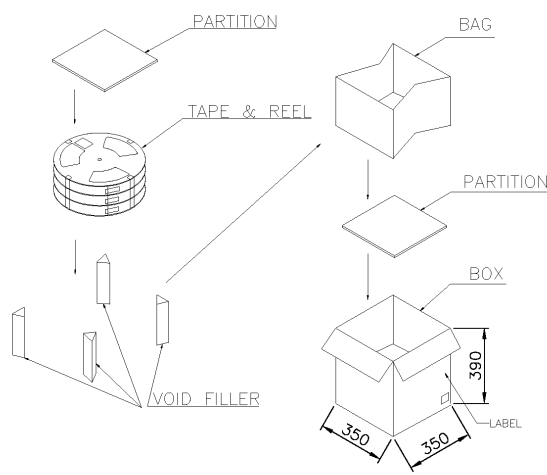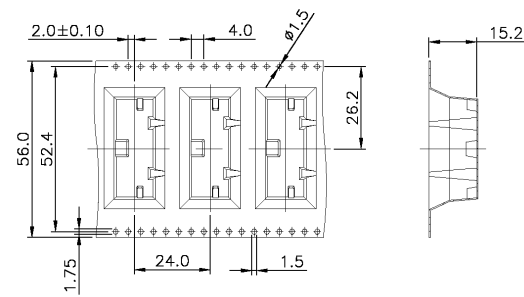

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		Tyco Electronics Corporation Taipei, Taiwan	
DIMENSIONS: MM		CHK		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		SLIM D-SUB 15P FEMALE, REVERSE TYPE	
0 PLC ±		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO	
1 PLC ±		APPLICATION SPEC		A3 00779 C=1734783	
2 PLC ±		WEIGHT		RESTRICTED TO	
3 PLC ±		CUSTOMER DRAWING		SCALE	
4 PLC ±		SCALE		SHEET 2 of 2	
5 PLC ±		SHEET		REV B1	
6 BCC ANGLES ±		REV			
FINISH					

AMP 1470-19 REV 31MAR2000